



Quickly

- N - S - L
- CAVALLINO
- T - TT

S P A R E P A R T S L I S T

EDITION JUNE 1960

NSU (GREAT BRITAIN) LTD.

134—136, KING STREET

HAMMERSMITH, LONDON W 6

ENGINE

Quickly - 2 Gears

Engine, Crankcase, Cylinder	00 / 01 / 02
Flywheel assy, Transmission, Clutch	04 / 10 / 13
Carburettor, Electrical equipment (engine), Air cooling	16 / 17 / 19

Quickly - 3 Gears

Engine, Crankcase, Cylinder	00 / 01 / 02
Flywheel assy, Transmission, Clutch	04 / 10 / 13
Carburettor, Electrical equipment (engine), Air cooling	16 / 17 / 19

CHASSIS

Quickly - N - S

Frame, Mudguards, Centre stand, Luggage-carrier, Saddle	31 / 33 / 34 / 35 / 36 / 38
Spring fork, Handlebar, Bowden cables	41 / 43 / 44
Front wheel, Rear wheel, Rear brake linkage, Chain drive and Cover	51 / 52 / 53 / 54
Exhaust system, Fuel tank, Electrical equipment (chassis)	71 / 72 / 81
Tools, Speedometer	91 / 92

CHASSIS

Quickly - L

Frame, Swinging fork, Front mudguard, Centre stand, Saddle	31 / 32 / 33 / 35 / 38
Spring fork, Handlebar, Bowden cables	41 / 43 / 44
Front wheel, Rear wheel, Rear brake linkage, Chain drive and Cover	51 / 52 / 53 / 54
Exhaust system, Fuel tank, Electrical equipment (chassis)	71 / 72 / 81
Tools, Speedometer, Special equipment/optional	91 / 92 / 93

CHASSIS

QUICKLY Cavallino

Frame, Swinging fork, Mudguards, Centre stand, Saddle	31 / 32 / 33 / 34 / 35 / 38
Spring fork, Handlebar, Bowden cables	41 / 43 / 44
Front wheel, Rear wheel, Rear brake linkage, Chain drive and Cover	51 / 52 / 53 / 54
Exhaust system, Fuel tank, Electrical equipment, (chassis)	71 / 72 / 81
Tools, Speedometer, Special equipment/optional	91 / 92 / 93

CHASSIS


Quickly - T

Frame, Rear fork, Front mudguard, Centre stand, Carrier for Rear cowling (Luggage carrier) Footrests, Saddle	31 / 32 / 33 / 35 / 36 / 37 / 38
Body, Spring fork, Handlebar, Bowden cables	39 / 41 / 43 / 44
Front wheel, Rear wheel, Rear brake linkage, Chain drive and Cover, Front and Rear wheel suspension	51 / 52 / 53 / 54 / 56 / 57
Accessories, Exhaust system, Fuel tank, Electrical equipment, (chassis)	66 / 71 / 72 / 80 / 81
Tools, Speedometer, Special equipment,	91 / 92 / 93

CHASSIS


Quickly - TT

Frame, Rear fork, Front mudguard, Centre stand, Footrests, Saddle	31 / 32 / 33 / 35 / 37 / 38
Body, Spring fork, Handlebar, Bowden cables	39 / 41 / 43 / 44
Front wheel, Rear wheel, Rear brake linkage, Chain drive and Cover, Front and Rear wheel suspension	51 / 52 / 53 / 54 / 56 / 57
Accessories, Exhaust system, Fuel tank, Electric cables, Electrical equipment, (Headlamp, Taillamp)	66 / 71 / 72 / 80 / 81
Tools, Speedometer, Special equipment	91 / 92 / 93

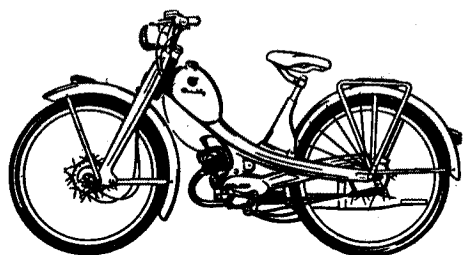


Quicikly - N

from frame/engine **000 001 / 000 001**

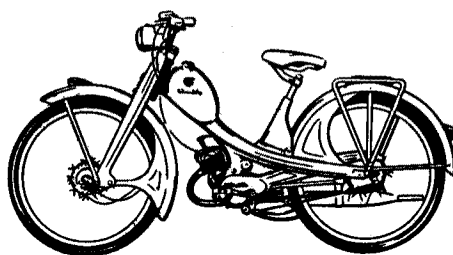


Quicikly - S

from frame/engine **360 030 / 380 173**

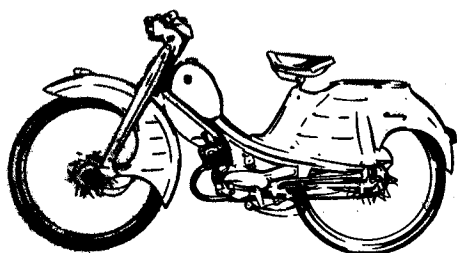


Quicikly - L

from frame/engine **530 211 / 576 197**

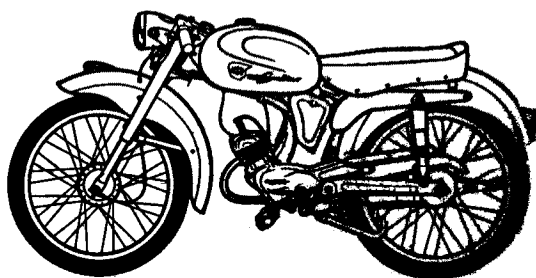


QUICKLY *Cavallino*

from frame/engine **668 411 / 704 717**

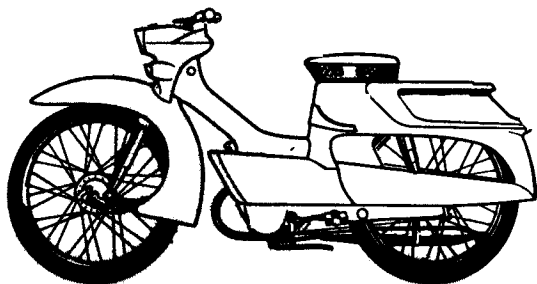

Quicikly - T


from frame/engine **2 900 001 / 2 900 041**

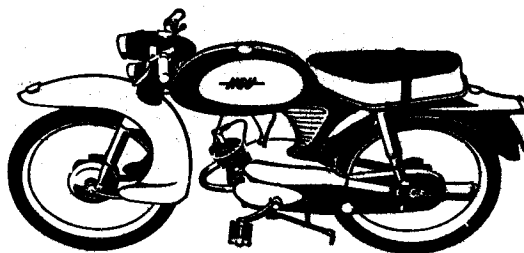

Quicikly - TT


from frame/engine **3 900 001 / 3 900 001**

NSU - QUICKLY - Colour chart



513 (80)


Light grey



514 (81)


Dove grey

Dual-tone colour scheme: Light grey/Dove grey **513** (70)



310 (73)


Lido blue



511 (85)


Pearl grey

Dual-tone colour scheme: Lido blue/Pearl grey **310** (73)



512 (83)


Whale grey



207 (75)


Coral red

Dual-tone colour scheme: Whale grey/Coral red **512** (75)



308 (114)


Rhodos blue



309 (113)

Royal blue

Dual-tone colour scheme: Rhodos blue/Royal blue **308**



406 (57)


Jade green



411 (84)

Pale green

Dual-tone colour scheme: Jade green/Pale green **406** (57)



210 (74)


Virginia brown



412 (86)


Isar sand

Dual-tone colour scheme: Virginia brown/Isar sand **210** (74)



408 (112)


Lind green



410 (111)


Moss green

Dual-tone colour scheme: Lind green/Moss green **408**



208 (76)

Cavallino red



213

Alfa red II

810 (10)

Chromium-plated

590 (31)

Black

Ordering components use the given dual tone colour scheme numbers. For varnish use the shade numbers given underneath the illustrated paints. The numbers given in brackets symbolise the formerly common shade numbers.

Instructions for ordering spare parts

This Spare Parts List contains the **Order Numbers** and the **Description** of all the genuine Spare Parts that are available for the NSU-QUICKLY, and they are also **illustrated**.

The parts are listed according to the Groups to which they belong (see first page and also thumb index).

The information in the numbered columns is as follows:

- Column 1 = Part No.
- Column 2 = Quantity req'd.
- Column 3 = Remarks
- Column 4 = Fig. No.

One or more **vertical arrows after the Part No.** indicate the items included in **complete assemblies**. Where the arrow is interrupted (—), the part concerned is not included in the assembly.

Ordering Spare Parts

Please do not use the orders for other messages or when making enquiries.

An Order for Spare Parts must give:

1. The full address of the person or firm ordering and the date.
2. The way the parts are to be sent, and, if by rail, the nearest railway station.
3. The complete Order Numbers (as given in the Spare Parts List).
4. The quantity required.
5. The correct description of the parts (as given in the Spare Parts List).
6. For painted parts in addition to the Order No. give the Code Number for the finish required:

Chromium-plated	= 810 (10)
Black	= 590 (31)
Dual-tone: Light grey — Dove grey	= 513 (70)
Dual-tone: Jade green — Pale green	= 406 (57)
Dual-tone: Lido blue — Pearl grey	= 310 (73)
Dual-tone: Virginia brown — Isar sand	= 210 (74)
Dual-tone: Whale grey — Coral red	= 512 (75)
Dual-tone: Lind green — Moss green	= 408
Dual-tone: Rhodos blue — Royal blue	= 308
Dual-tone: Cavallino red	= 208 (76)
Dual-tone: Alfa red II	= 213

(See colour chart)

7. When ordering parts for a specific machine, quote not only the Frame No. and the Engine No., but also the Type (N, S, L, Cavallino, T or TT).
8. Signature of the person ordering.

A short horizontal arrow **in front of** the Vehicle No. in the „Remarks“ column indicates **up to Vehicle No.** A short horizontal arrow **after** the Vehicles No. in the „Remarks“ column indicates **from Vehicle No.**

This description of all the Spare Parts is preceded by an **Order No. Index**, in which the Order Nos. which commence with a three-figure group are first listed in numerical order (without reference to the initial group). These are followed by the parts that commence with 11, 16, 19, 26, 29, 35, 39, or 40, and finally there are the parts made to DIN Standards listed according to the DIN numbers and their dimensions. Against each Order No. is shown the **page** on which the description and illustration of the part concerned will be found.

Alterations to Spare Parts must be taken into consideration. They are circulated to NSU Dealers in the **NSU Service Information Bulletins**, so that it is always possible to keep the Spare Parts Lists up to date.

If at some prior date the machine has been **repaired**, and major components have been fitted which differ from those originally employed, please take this into consideration when ordering Spare Parts. In case of doubt send a sample or a sketch.

Conditions of Supply:

Goods are always **sent C. O. D.** unless paid for in advance.

Apart from items supplied in the original carton, all prices refer to goods supplied unpacked. The packing will be charged for at cost, and is non-returnable. Any **complaints** to the supplier should be made within 8 days of receipt of the goods, enclosing the delivery note.

Special Note:

All genuine NSU Spare Parts are made to the same specifications as the NSU machines, and are subjected to the same examination and tests. The use of **Genuine NSU Spare Parts** ensures therefore that the correct materials are employed and that the specified dimensions are maintained.

London, June 1960

NSU (GREAT BRITAIN) Ltd.

NSU (GREAT BRITAIN) LTD.

134—136, KING STREET

HAMMERSMITH, LONDON W 6

Telephone: Riverside 2080 (9 lines)

Telegrams and Cables: ENESU LONDON

Telex: 25445

Registered Office: 7, Chesterfield Gardens, London W 1

List of Order Numbers

This list includes all the spare parts numbers in the spare parts list.

Order No.	page	Order No.	page	Order No.	page	Order No.	page
035 044 998	51	041 404 134	60	11 39 00 009	68, 99	16 01 00 038	1, 18
024 049 962	39, 59, 87, 103	041 410 090	11, 12, 15, 28, 29	11 39 00 029	102	16 01 00 039	1, 18
034 049 991	71, 72	041 410 091	11, 12, 15, 28, 29	11 39 00 066	99	16 01 00 040	19
035 052 368	76, 78	041 410 523	12, 13, 15, 28, 29, 30	11 40 00 031	68, 86	16 01 00 046	19
011 055 770	3, 20	043 411 209	37	11 44 00 032	81	16 01 00 047	1, 18
59 252	65	044 412 131	37, 38, 59, 87, 103	11 44 00 910	60, 61, 88	16 01 00 050	20
125 059 963	51, 80, 94, 99, 108	044 413 608	40, 42, 73, 104	11 44 20 992	88	16 01 00 402	19
534 080 054	33, 34, 57	045 414 027	7	11 53 00 002	59, 65, 75, 80	16 01 00 500	2
534 080 055	33, 34, 57	073 771 032	98	11 53 00 819	51, 65, 75, 80, 94, 108	16 01 01 500	19
534 080 396	33	073 772 030	53, 66	11 55 00 731	7, 24	16 01 00 501	3, 20
535 083 170	7, 24	074 742 006	39, 59, 87, 103	11 72 00 006	97, 111	16 01 01 501	3, 20
535 083 635	7, 24	074 743 606	60	11 81 00 864	31	16 01 01 502	2
533 085 385	35, 58, 70	074 743 618	40	11 91 00 600	55, 67, 83, 99, 113	16 01 02 502	19
011 095 858	4, 21	075 751 030	91, 93, 106	11 91 00 601	55, 67, 83, 99, 113	16 01 00 504	2
018 096 618	86	075 751 601	64	16 00 01 903	1	16 01 01 504	19
016 096 826	82	075 751 603	44, 46, 47, 49, 63	16 00 02 903	18	16 01 00 505	3, 20
034 097 150	7	075 752 027	2	16 00 90 907	18	16 01 90 509	20
011 098 150	11, 12, 15, 28, 29	075 753 506	51	16 01 02 004	2	16 01 00 601	20
011 098 151	11, 12, 28, 29	075 754 021	94, 108	16 01 00 005	2	16 01 00 900	3
012 098 209	5, 22	081 802 089	4, 21	16 01 00 007	2	16 01 01 900	20
015 099 180	44	083 871 012	1, 18	16 01 00 008	3, 20	16 01 00 901	2
034 099 167	18, 104	084 844 015	75	16 01 00 009	3, 20	16 01 01 901	19
035 099 491	51, 80	083 834 017	56	16 01 00 011	3		
025 100 655	51, 80, 94, 108	083 872 018	81	16 01 00 014	3	16 02 00 004	4, 21
025 103 290	91, 106	083 874 033	99	16 01 01 014	20	16 02 01 004	4
024 103 441	39	091 901 032	3	16 01 00 015	3	16 02 00 005	4, 21
025 103 744	90, 92, 93, 107	11 13 00 780	40, 42, 73, 104	16 01 01 015	20	16 02 00 006	4, 21
023 103 927	33, 56, 84, 100	11 16 00 024	99	16 01 00 017	3, 20	16 02 00 007	4, 21
024 103 928	39, 59, 87, 103	11 16 00 030	100	16 01 01 022	2	16 02 00 008	4, 21
024 103 929	39, 59, 87, 103	11 17 00 068	14, 16, 31	16 01 00 025	2, 19	16 02 01 004	21
025 104 183	77, 79, 90, 91, 92, 93, 106, 107	11 17 10 912	14, 31	16 01 00 026	2	16 02 01 008	4, 21
023 104 269	53, 66, 81, 97, 111	11 17 10 916	13, 30	16 01 01 026	19	16 02 00 009	4, 21
026 104 311	82	11 17 10 923	14, 31	16 01 00 027	3	16 02 00 010	4, 21
028 104 762	58	11 17 10 993	4, 7, 14, 21, 24, 31	16 01 01 027	20	16 02 01 013	4, 21
028 104 992	99, 113	11 17 10 994	13, 30	16 01 00 028	2, 3, 19, 20	16 02 00 015	4, 21
021 105 512	3, 6, 20, 90, 92	11 17 10 996	14, 31	16 01 00 032	3, 20	16 02 00 016	4, 21
024 106 412	60, 88	11 17 10 997	14, 31	16 01 00 033	3, 20	16 02 00 500	4, 21
014 106 433	40, 42, 73, 104			16 01 00 034	3, 20	16 02 01 500	21
011 109 070	14, 31					16 02 00 501	4, 21
033 109 155	53, 66, 81, 111					16 02 01 501	4, 21
123 109 912	58					16 02 00 502	4, 5, 21, 22
014 110 027	88					16 02 01 502	21, 22
126 110 414	98, 112						
041 401 140	8, 25					16 04 00 003	5, 22

Order No.	page	Order No.	page	Order No.	page	Order No.	page
16 04 02 011	5, 22	16 10 00 058	6	16 16 01 006	10, 27	16 17 00 502	13
16 04 00 013	5, 22	16 10 00 059	6	16 16 03 008	10, 27	16 17 01 502	13
16 04 00 014	5, 22	16 10 00 401	6	16 16 01 008	27	16 17 00 503	11, 28
16 04 00 015	5, 22	16 10 01 401	6	16 16 00 009	10	16 17 01 503	12, 29
16 04 00 016	5, 22	16 10 02 401	23	16 16 01 009	10, 27	16 17 01 504	13, 30
16 04 00 017	5, 22	16 10 00 402	7, 24	16 16 00 014	10	16 17 02 504	13, 30
16 04 01 502	5, 22	16 10 01 501	6	16 16 00 017	10, 27	16 17 00 507	14, 16, 31
16 04 00 503	5, 22	16 10 01 502	6	16 16 00 018	10, 27	16 17 00 900	11, 14, 28, 31
16 04 02 504	5, 22	16 10 02 502	23	16 16 00 019	10, 27	16 17 01 900	11, 12, 14, 28, 29, 31
16 04 00 600	5, 22	16 10 00 503	6	16 16 00 022	27	16 17 10 901	14, 31
16 04 01 901	5, 22	16 10 01 503	23	16 16 00 023	27	16 17 10 903	13
		16 10 00 504	7	16 16 01 504	9	16 17 11 903	13, 30
16 10 01 003	6	16 10 00 507	6	16 16 02 504	9, 26	16 17 10 904	13, 30
16 10 00 004	6	16 10 01 507	6	16 16 00 901	9	16 17 12 904	13, 30
16 10 01 004	6	16 10 02 507	23	16 16 01 901	9, 26	16 17 10 905	11, 12, 13, 15, 28, 29, 30
16 10 03 005	23	16 10 00 508	23	16 16 00 902	9, 26	16 17 10 906	13, 30
16 10 00 007	6, 23			16 16 00 903	9, 26	16 17 10 907	13, 30
16 10 00 009	6	16 13 00 006	8, 25	16 16 00 904	9	16 17 10 908	13, 30
16 10 01 009	6, 23	16 13 00 007	8, 25	16 16 01 904	9, 26	16 17 10 909	13, 30
16 10 02 009	6	16 13 00 008	8, 25	16 16 00 905	9	16 17 10 910	14, 31
16 10 00 010	6, 23	16 13 00 011	8, 25	16 16 01 905	9, 26	16 17 10 911	14, 31
16 10 00 011	7	16 13 00 012	8, 25	16 16 02 905	26	16 17 10 912	14, 31
16 10 02 011	23	16 13 00 013	8, 25	16 16 00 906	9, 26	16 17 10 913	14, 31
16 10 00 012	6	16 13 00 014	8, 25	16 16 00 907	9, 26	16 17 12 913	14, 31
16 10 02 012	23	16 13 00 016	8, 25	16 16 00 908	9, 26	16 17 10 915	14
16 10 00 013	7, 23	16 13 00 501	8, 25	16 16 00 909	9	16 17 11 915	14
16 10 01 014	7, 24	16 13 00 502	8, 25	16 16 01 909	9, 26	16 17 10 916	13, 30
16 10 03 014	7, 24	16 13 00 503	8, 25	16 16 00 910	9, 26	16 17 00 919	11
16 10 04 014	7, 24	16 13 00 504	8, 25	16 16 03 911	9, 26	16 17 00 920	11, 28
16 10 00 015	6	16 13 00 600	8, 25	16 16 00 912	9, 26	16 17 01 920	12, 29
16 10 01 015	23			16 16 00 913	9, 26	16 17 00 921	11
16 10 00 016	7, 24	16 14 00 002	7	16 16 00 914	9, 26	16 17 00 922	11, 28
16 10 00 017	7, 24	16 14 00 005	7	16 16 00 915	9, 26	16 17 01 922	12, 29
16 10 00 019	7, 23	16 14 01 005	7	16 16 00 916	9	16 17 00 924	11, 12, 13, 28, 29, 30
16 10 00 022	6, 23	16 14 00 006	7	16 16 01 916	9, 26	16 17 00 925	11, 12, 28, 29
16 10 00 025	7, 23	16 14 00 007	7	16 16 00 917	9, 26	16 17 00 926	11, 12, 28, 29
16 10 00 026	7, 24	16 14 00 014	24	16 16 00 918	9	16 17 00 927	11, 12, 14, 15, 28, 29, 31
16 10 00 027	6	16 14 00 015	24	16 16 01 918	9, 26	16 17 00 928	11, 12, 28, 29
16 10 00 028	6	16 14 00 017	24	16 16 00 919	9, 26	16 17 00 929	11, 12, 28, 29
16 10 00 029	6	16 14 00 021	24	16 16 00 920	9	16 17 00 930	11
16 10 00 031	6	16 14 00 501	7	16 16 01 920	9, 26	16 17 00 931	11, 28
16 10 00 033	6	16 14 00 503	24	16 16 00 923	9, 26	16 17 01 931	12, 29
16 10 00 035	6	16 14 00 504	24	16 16 01 924	9, 26	16 17 10 932	13
16 10 00 036	6, 23	16 14 00 505	7	16 16 00 925	9, 26	16 17 11 932	13, 30
16 10 00 042	23			16 16 00 926	9, 26	16 17 00 933	11, 28
16 10 01 043	23	16 16 00 002	10	16 16 00 927	9, 26	16 17 01 933	12, 29
16 10 01 044	23	16 16 00 003	10	16 16 00 928	26	16 17 00 936	12, 29
16 10 00 046	23	16 16 01 003	10				
16 10 00 047	6, 23	16 16 00 004	10	16 17 00 002	14, 31		
16 10 00 048	23	16 16 00 005	10	16 17 00 004	14, 16, 31		
16 10 00 057	6	16 16 00 006	10, 27	16 17 00 501	11		

Order No.	page	Order No.	page	Order No.	page	Order No.	page
16 31 00 019	33, 56	16 32 90 904	80	16 38 00 502	33	16 41 00 056	38
16 31 00 020	33, 56	16 32 90 905	69	16 38 01 504	33	16 41 01 056	38, 59, 87, 103
16 31 00 023	33	16 32 90 906	69	16 38 90 505	70	16 41 00 064	38, 59
16 31 00 030	33			16 38 00 900	33	16 41 00 080	38, 59, 87, 103
16 31 00 038	33, 56	16 33 00 010	35, 58, 84	16 38 00 901	34, 57	16 41 00 081	38, 59, 87, 103
16 31 00 058	56	16 33 00 502	35	16 38 00 902	34, 57	16 41 00 083	38 59
16 31 00 061	56	16 33 00 503	35	16 38 00 903	34, 57	16 41 00 086	39, 59
16 31 00 062	56	16 33 00 504	35	16 38 00 904	34	16 41 00 087	35, 38, 56, 59, 61
16 31 00 066	56	16 33 02 504	35	16 38 01 904	57	16 41 00 088	37, 38
16 31 00 070	33, 56	16 33 04 504	58	16 38 00 905	34	16 41 01 088	39, 59
16 31 00 071	56	16 33 01 505	35	16 38 01 905	57	16 41 00 089	59
16 31 00 073	56	16 33 02 505	35	16 38 00 906	34	16 41 00 090	59
16 31 00 076	56	16 33 03 505	58	16 38 01 906	57	16 41 00 091	59
16 31 00 078	56	16 33 90 510	70	16 38 00 907	34, 57	16 41 90 095	72
16 31 00 079	56	16 33 90 901	70	16 38 00 908	34	16 41 90 096	72
16 31 00 086	56	16 33 90 902	70	16 38 00 909	34	16 41 90 097	72
16 31 00 087	56, 70			16 38 00 910	34	16 41 90 098	72
16 31 00 089	56	16 34 00 011	36	16 38 00 911	34, 57	16 41 00 401	37
16 31 00 091	56, 101	16 34 00 019	36, 56	16 38 00 912	34	16 41 00 402	71
16 31 90 092	69	16 34 00 020	36	16 38 00 913	34	16 41 00 508	37
16 31 02 501	33	16 34 00 021	35	16 38 01 913	57	16 41 01 508	38
16 31 00 510	33	16 34 00 503	35	16 38 00 914	34	16 41 02 508	38, 59
16 31 00 516	56	16 34 00 504	35	16 38 01 914	57	16 41 00 509	37
16 31 00 521	56	16 34 00 505	36	16 38 00 915	34	16 41 01 509	38
16 31 00 530	56	16 34 00 508	35	16 38 01 915	57	16 41 00 513	38, 59
16 31 00 531	56	16 34 00 509	35	16 38 00 916	34, 57	16 41 00 515	39, 59
16 31 00 532	56	16 34 01 509	35	16 38 00 917	57	16 41 00 516	59
16 31 00 900	33, 56	16 34 00 510	35	16 38 90 918	70	16 41 90 517	71
16 31 00 901	33	16 34 01 510	35	16 38 90 919	70	16 41 91 517	71
16 31 01 901	56	16 34 90 901	70	16 38 90 920	70	16 41 93 517	72
16 31 90 902	69	16 34 90 902	70	16 38 90 921	70	16 41 90 519	71
16 31 90 903	69			16 38 90 922	70	16 41 91 521	72
16 31 90 904	69	16 35 00 010	35, 58, 64	16 38 90 924	70	16 41 91 522	71
		16 35 00 013	35, 58			16 41 90 523	72
16 32 00 008	57	16 35 00 503	35	16 41 00 010	37, 38	16 41 90 524	72
16 32 00 012	57	16 35 01 503	58	16 41 01 010	37, 38	16 41 90 525	72
16 32 00 016	57	16 35 01 504	35, 58	16 41 03 010	39	16 41 90 527	72
16 32 00 017	57	16 35 90 505	69	16 41 04 010	39, 57, 59	16 41 90 528	72
16 32 00 019	57	16 35 90 900	69	16 41 00 012	37, 38	16 41 90 530	72
16 32 00 022	57	16 35 90 901	69	16 41 00 041	37	16 41 00 900	37
16 32 00 027	57			16 41 00 045	37, 38, 59, 87, 113	16 41 02 900	38
16 32 00 029	57	16 38 00 001	34	16 41 02 046	39	16 41 03 900	38
16 32 00 030	57	16 38 00 002	34	16 41 01 048	39	16 41 04 900	59
16 32 00 502	57	16 38 00 003	33	16 41 02 048	59	16 41 00 901	37
16 32 00 504	57	16 38 00 004	33	16 41 00 050	37, 39, 57, 59	16 41 02 901	38
16 32 00 506	57	16 38 00 016	33	16 41 00 051	39, 87, 103	16 41 03 901	38, 59
16 32 00 509	57	16 38 00 017	34	16 41 00 053	38	16 41 00 902	37
16 32 00 511	69	16 38 01 019	34, 57	16 41 00 054	39, 59	16 41 90 904	71
16 32 90 900	69	16 38 00 501	33	16 41 00 055	39, 59, 87, 103		
16 32 90 901	69	16 38 01 501	34				
16 32 90 903	69	16 38 02 501	57				

Order No.	page	Order No.	page	Order No.	page	Order No.	page
16 41 90 905	. . 71, 72	16 44 00 001	. . . 43	16 44 00 901	. . . 40	16 44 00 930	. . 62, 75
16 41 90 906	. . . 71	16 44 01 001	. . 43, 62	16 44 01 901	. . . 40	16 44 00 931	43, 89, 105
16 41 90 907	. . . 71	16 44 01 002	. . 43, 62	16 44 02 901	. . 60, 88		
16 41 90 908	. . 71, 72	16 44 00 003	. . . 43	16 44 03 901	. . 40, 42, 73, 104	16 51 00 001	. . . 48
16 41 90 909	. . 71, 72	16 44 01 003	. . 43, 62, 65, 75	16 44 00 902	. . 40, 42, 73, 104	16 51 01 001	. . . 44
16 41 91 911	. . . 71	16 44 00 008	. . . 43	16 44 00 903	. . 40, 42, 73, 88, 104	16 51 00 009	. . . 45
16 41 90 912	. . . 71	16 44 00 021	43, 75, 105	16 44 00 904	. . 40, 41, 42, 74, 104	16 51 00 017	. . . 45
16 41 90 913	. . . 71	16 44 00 023	. . 43, 62, 75, 89, 105	16 44 01 904	. . 40, 42, 61, 73, 104	16 51 02 017	. . 46, 63
16 41 91 915	. . . 71	16 44 00 025	. . 43, 62, 75, 89, 104	16 44 02 904	. . 60, 88	16 51 00 023	44, 46, 47, 49, 63, 64, 77, 79
16 41 90 916	. . . 72	16 44 00 029	. . . 40	16 44 00 905	. . . 40	16 51 00 025	. . 44, 46, 48, 63
16 43 00 001	. . 41, 42	16 44 00 039	. . 43, 62	16 44 01 905	. . . 40	16 51 03 025	. . . 77
16 43 01 002	. . 40, 42	16 44 00 040	. . 43, 62	16 44 02 905	. . . 61	16 51 01 027	. . 44, 48
16 43 00 003	. . . 60	16 44 00 041	. . 43, 62	16 44 03 905	. . . 61	16 51 03 027	46, 49, 63, 64, 77, 79
16 43 00 032	. . . 61	16 44 01 041	. . 43, 62	16 44 04 905	42, 73, 104	16 51 00 028	. . . 45
16 43 00 035	. . . 61	16 44 00 042	. . 43, 62	16 44 00 906	. . . 41	16 51 02 028	. . 46, 63
16 43 00 036	. . . 67	16 44 00 046	. . . 89	16 44 01 906	. . . 41	16 51 03 028	. . . 77
16 43 00 037	. . . 67	16 44 00 049	. 62, 75, 89	16 44 02 906	. . . 61	16 51 00 030	. . 44, 48
16 43 00 038	. . . 60	16 44 00 056	. . 43, 62, 75, 89, 105	16 44 03 906	. . . 61	16 51 03 030	46, 49, 63, 64, 77, 79
16 43 00 047	. . . 59	16 44 00 501	. . . 43	16 44 04 906	42, 74, 104	16 51 00 035	. . . 44
16 43 00 049	. . . 54	16 44 02 501	. . . 43	16 44 00 907	. . . 41	16 51 01 035	. 46, 63, 77
16 43 00 050	. . 41, 42	16 44 03 501	. . . 62	16 44 01 907	. . 61, 88	16 51 00 036	45, 46, 63, 77, 79
16 43 01 501	. . . 40	16 44 00 502	. . 43, 75	16 44 02 907	42, 74, 104	16 51 01 036	. 48, 50, 64
16 43 02 501	. . . 40	16 44 01 502	. . . 62	16 44 00 908	41, 42, 61, 74, 88, 104	16 51 00 043	44, 46, 48, 49, 63, 64, 77, 79
16 43 06 501	. . . 42	16 44 00 503	. . . 43	16 44 00 909	. . 41, 42, 74, 104	16 51 00 044	44, 46, 47, 49, 63, 64, 77, 79
16 43 00 502	. . . 40	16 44 02 503	. . . 43	16 44 01 909	. . . 61	16 51 00 045	44, 46, 47, 49, 63, 64, 77, 79
16 43 01 502	. . . 40	16 44 03 503	. . . 62	16 44 03 909	. . . 88	16 51 01 054	46, 49, 63, 64, 77, 79
16 43 02 502	. . . 40	16 44 04 503	. . . 62	16 44 00 910	41, 42, 61, 74, 88, 104	16 51 90 078	. 76, 77, 78, 79
16 43 03 502	. 40, 42, 73	16 44 05 503	. . 43, 75	16 44 00 911	. . 40, 42, 73, 104	16 51 00 502	. . . 44
16 43 01 503	. . . 40	16 44 00 504	. . . 43	16 44 00 913	. . 41, 42, 73, 104	16 51 01 502	. 46, 63, 77
16 43 02 503	42, 73, 104	16 44 01 504	43, 89, 105	16 44 00 916	. . 41, 42, 74, 104	16 51 04 503	. 46, 63, 77
16 43 00 510	60, 98, 112	16 44 02 504	. . . 62	16 44 00 920	. . . 40	16 51 01 507	. . . 44
16 43 00 514	. . . 61	16 44 00 505	. . 41, 42	16 44 00 921	. . . 40	16 51 03 507	. . . 46
16 43 01 514	. . . 61	16 44 00 509	. . . 43	16 44 01 921	. . 60, 88	16 51 04 507	. . . 63
16 43 00 515	. . . 60	16 44 01 509	. . . 43	16 44 02 921	. . 40, 42, 73, 104	16 51 00 509	. . . 48
16 43 01 515	. . . 60	16 44 02 509	. . . 62	16 44 00 922	. . . 40	16 51 01 509	. . . 44
16 43 00 519	. . . 60	16 44 00 511	. . . 89	16 44 01 922	. . 60, 88	16 51 02 509	46, 49, 63, 64, 77, 79
16 43 00 520	. . . 61	16 44 00 512	. . . 105	16 44 00 923	. . 41, 42, 74, 104	16 51 00 511	. . . 44
16 43 01 521	. . . 60	16 44 00 513	. . . 75	16 44 01 923	. . . 61	16 51 02 511	. 46, 63, 77
16 43 00 522	. . . 60	16 44 00 515	. . . 75	16 44 00 926	. . . 61	16 51 01 515	. . 44, 47
16 43 90 524	. . . 73	16 44 00 516	. . . 75	16 44 00 927	. . . 61		
16 43 91 524	. . . 73	16 44 00 518	. . . 62	16 44 00 929	. . 40, 42, 73, 104		
16 43 90 526	. . . 73	16 44 00 519	. . 43, 75				
16 43 91 526	. . . 73	16 44 00 520	. . . 75				
16 43 90 527	. . . 73	16 44 00 900	. . . 40				
16 43 91 527	. . . 73	16 44 01 900	. . . 40				
16 43 90 900	. . . 73	16 44 02 900	. . . 40				
16 43 91 900	. . . 73	16 44 03 900	. . . 60				
16 43 90 901	. . . 73	16 44 04 900	. 40, 42, 73				
16 43 91 901	. . . 73						
16 43 90 902	. . . 73						
16 43 90 903	. . . 73						

Order No.	page	Order No.	page	Order No.	page	Order No.	page
16 51 00 517	44	16 52 03 021	49, 64, 79	16 52 90 912	78	16 71 01 005	52
16 51 01 517	46	16 52 03 026	46, 49, 63, 64, 77, 79	16 52 90 913	76, 78	16 71 02 005	66, 81, 111
16 51 02 517	63	16 52 00 031	47	16 52 90 914	76, 78	16 71 00 006	52, 66, 81, 97, 111
16 51 00 518	44	16 52 01 034	46, 49, 63, 64, 77, 79	16 52 90 915	78	16 71 02 008	52, 97
16 51 01 518	46	16 52 00 036	44, 46, 47, 49, 63, 64	16 52 90 916	78	16 71 03 008	66, 81, 111
16 51 02 518	63	16 52 00 037	44, 46, 47, 49, 63, 64, 77, 79	16 52 90 917	76, 78	16 71 00 009	52
16 51 90 521	76	16 52 00 038	44, 46, 47, 49, 63, 64	16 52 90 918	76, 78	16 71 01 009	52, 66, 81, 97, 111
16 51 90 523	77	16 52 00 043	68	16 52 90 919	76, 78	16 71 00 502	52
16 51 90 525	77	16 52 01 043	46, 49, 63, 64, 77, 79, 91, 93, 106, 107	16 52 90 920	78	16 71 01 502	52
16 51 01 900	44	16 52 01 044	49, 64, 79	16 52 90 921	76, 78	16 71 02 502	52, 97
16 51 02 900	46	16 52 00 045	49, 56, 64, 79	16 52 90 922	78	16 71 03 502	66, 81
16 51 03 900	63, 77	16 52 00 046	49, 64, 79	16 52 90 923	78	16 71 00 503	52
16 51 00 902	44	16 52 00 049	49, 64	16 52 90 924	78	16 71 00 504	52
16 51 90 904	76	16 52 01 049	79	16 52 90 925	78	16 71 00 505	52
16 51 90 905	76, 78	16 52 00 055	46, 49, 63, 64	16 52 90 926	78	16 71 02 505	52, 66, 81, 97
16 51 90 906	76, 78	16 52 00 056	44, 46, 47, 49	16 52 90 927	78	16 71 00 506	52
16 51 91 906	77, 79	16 52 00 058	79	16 52 90 928	76, 78	16 71 00 600	52
16 51 90 907	76	16 52 02 508	47	16 52 90 929	79		
16 51 90 908	76	16 52 03 503	49	16 52 90 931	78		
16 51 90 909	76	16 52 04 508	64			16 72 00 003	53
16 51 90 910	76	16 52 00 509	48	16 53 00 002	51	16 72 01 003	53, 66
16 51 90 911	76, 78	16 52 01 509	48	16 53 00 003	51	16 72 00 004	53, 66
16 51 90 912	76, 78	16 52 02 509	49	16 53 01 003	51, 80, 94	16 72 01 007	53, 66
16 51 90 913	76, 78	16 52 03 509	64	16 53 00 005	51, 94, 108	16 72 00 008	53, 66
16 51 90 914	76, 78	16 52 01 518	49	16 53 00 006	51, 94, 108	16 72 00 010	53
16 51 90 915	76, 78	16 52 02 518	64, 79	16 53 00 010	65, 75, 80	16 72 01 010	66
16 51 90 916	76	16 52 00 519	47	16 53 01 012	80	16 72 00 019	53, 66
16 51 90 917	77	16 52 01 520	49	16 53 00 013	65, 75, 80	16 72 00 022	53
		16 52 02 520	64	16 53 00 018	80	16 72 00 023	53
16 52 01 003	48	16 52 90 525	78	16 53 00 019	65	16 72 00 024	53, 66, 81, 97, 111
16 52 03 003	49, 79	16 52 90 529	79	16 53 00 501	51	16 72 00 032	53, 66
16 52 04 003	64	16 52 00 531	79	16 53 00 502	51, 80	16 72 00 033	53, 66
16 52 03 005	49, 64, 79	16 52 00 533	79	16 53 01 502	51, 94	16 72 01 035	53, 66, 99
16 52 00 011	48, 50, 64, 79	16 52 00 601	44, 47	16 53 00 505	65	16 72 90 039	81
16 52 00 014	48	16 52 02 900	47	16 53 90 506	80	16 72 00 501	53
16 52 01 014	50, 64	16 52 03 900	49	16 53 00 900	51	16 72 01 504	53, 66, 81, 97, 111
16 52 02 014	79	16 52 04 900	64, 79			16 72 01 505	53, 66, 81, 111
16 52 00 015	44, 47	16 52 01 903	48	16 54 01 001	65	16 72 00 508	53, 66
16 52 01 015	44, 46, 47, 49, 63, 64, 77, 79	16 52 90 906	76, 78	16 54 00 501	51	16 72 90 510	81
16 52 00 016	44, 47	16 52 90 907	76, 78	16 54 00 600	51, 65, 94, 108	16 72 91 510	81
16 52 01 016	44, 46, 47, 49, 63, 64, 77, 79	16 52 90 908	76, 78	16 54 00 601	51, 94, 108	16 72 90 516	81
16 52 01 017	44, 47	16 52 90 909	76, 78	16 54 01 601	65, 80	16 72 00 900	53, 66, 81, 111
16 52 02 017	44, 46, 47, 49, 63, 64, 77, 79	16 52 90 910	76, 78	16 54 00 603	51, 65, 80	16 72 00 901	53, 66, 81, 97, 111
16 52 01 018	48, 50, 64			16 54 90 900	80	16 72 00 902	53, 66, 81, 97, 111
16 52 03 018	79			16 54 91 900	80	16 72 00 903	53, 66, 81, 97, 111
16 52 01 021	48					16 72 00 904	53, 66, 81, 97, 111

Order No.	page	Order No.	page	Order No.	page	Order No.	page
16 72 00 905	. . 53, 66, 81, 97, 111	16 81 01 906	. . 54, 60, 98, 112	16 81 50 946	. . . 82	16 93 00 509	. . . 68
16 72 90 908	. . . 81	16 81 51 906	. . . 82	16 81 50 947	. . . 82	16 93 01 509	. . . 58
16 73 00 004	. 37, 38, 59	16 81 01 907	. . 54, 60, 98, 112	16 81 50 948	. . . 82	16 93 00 511	. . . 68
16 73 00 007	. . . 38	16 81 51 907	. . . 82	16 91 00 002	. 55, 67, 83	16 93 00 512	. . . 68
16 73 00 501	. . . 37	16 81 00 908	. . . 54	16 91 00 003	. . 55, 67, 83, 99, 113	16 93 00 513	. . . 68
16 73 90 504	. . . 83	16 81 01 908	60, 98, 112	16 91 00 004	. 55, 67, 83	16 93 00 514	. . . 68
16 73 00 900	. . . 37	16 81 51 908	. . . 82	16 91 01 004	. . . 83	16 93 00 515	. . . 68
16 73 03 900	. . . 59	16 81 00 910	. . . 54	16 91 00 005	. 55, 67, 83	16 93 01 519	. 10, 27, 68
16 73 00 901	. . . 33	16 81 50 910	. . . 82	16 91 00 900	. 55, 67, 83	16 93 00 520	. . 68, 96
16 73 01 901	. . . 38	16 81 00 911	. . 54, 60	16 91 90 920	. . . 83	16 93 00 900	. . . 68
16 73 90 902	. . . 83	16 81 50 911	. . . 82	16 92 00 001	. . . 55	16 93 00 901	. . . 68
16 73 90 903	. . . 83	16 81 00 912	. . . 54	16 92 02 502	. . 55, 67, 99, 113	16 93 90 904	. . . 83
16 81 01 001	. . . 82	16 81 51 912	. . . 82	16 92 00 503	. . . 55	16 93 90 906	. . . 83
16 81 01 002	. . . 67	16 81 00 913	. . . 54	16 92 01 503	. . 55, 67	16 93 00 907	. . . 35
16 81 02 002	. . 55, 82	16 81 01 914	. . . 54	16 92 00 505	. . . 55	19 41 00 034	. . . 71
16 81 00 003	. 54, 61, 71, 98, 112	16 81 52 914	. . . 67	16 92 02 505	. . 55, 67	19 43 00 009	. . . 60
16 81 00 006	. . 55, 67	16 81 54 914	. . . 82	16 92 90 507	. . . 83	19 43 00 010	. . . 60
16 81 00 007	. . . 82	16 81 52 915	. . 54, 67	16 92 91 507	. . . 83	19 43 00 020	. . . 60
16 81 00 008	. . . 67	16 81 54 915	. . . 82	16 92 90 508	. . . 83	19 44 00 013	. . . 62
16 81 00 012	. . . 82	16 81 00 916	. . . 54	16 92 90 509	. . . 83	19 44 00 014	. . . 62
16 81 90 013		16 81 51 916	. . . 67	16 92 00 905	. . 55, 67, 99, 113	26 32 00 027	86, 87, 103
16 81 02 502	. . . 82	16 81 50 917	. . . 67	16 92 91 909	. . . 83	29 00 00 902	. . . 18
16 81 00 506	. . . 54	16 81 51 918	. . . 67	16 92 90 910	. . . 83	29 01 00 001	. . . 3, 20
16 81 01 506	. . . 61	16 81 00 919	. . . 54	16 93 00 004	. . . 35	29 01 00 502	. . . 19
16 81 90 506	. . . 71	16 81 00 920	. . . 54	16 93 02 007	. . 33, 56	29 01 01 502	. . . 2
16 81 00 508	. . . 55	16 81 01 920	. . . 54	16 93 00 016	. . . 35	29 01 00 900	. . . 2
16 81 01 508	. . . 67	16 81 51 920	. . . 82	16 93 00 031	. . . 68	29 01 00 901	. . . 19
16 81 00 512	. . . 55	16 81 54 923	. . . 82	16 93 00 038	. . . 68	29 01 00 902	. . . 2
16 81 00 513	. . . 54	16 81 01 924	. 98, 112	16 93 00 042	. . 58, 68	29 01 00 903	. . . 19
16 81 00 514	. . 54, 67, 98, 112	16 81 02 924	. . . 60	16 93 00 044	. . 58, 68	29 01 00 904	. . . 20
16 81 01 516	. . . 54	16 81 00 925	. . 54, 67	16 93 00 045	. . 58, 68	29 01 00 905	. . . 3
16 81 00 517	. . 55, 67	16 81 00 927	. 54, 112	16 93 01 049	. . . 68	29 02 00 002	. . . 4, 21
16 81 00 520	. . . 67	16 81 00 928	. . . 54	16 93 01 050	. . . 68	29 02 00 003	. . . 4, 21
16 81 00 522	. . . 67	16 81 00 929	. . 55, 67	16 93 00 057	. 58, 68, 70, 104, 112	29 02 00 006	. . . 4, 21
16 81 90 528	. . . 82	16 81 00 931	. . . 54	16 93 00 058	. . 1, 18, 58, 68	29 02 00 501	. . . 21
16 81 90 529	. . . 82	16 81 50 932	. . . 82	16 93 00 059	. . . 58	29 02 00 503	4, 5, 21, 22
16 81 50 900	. . . 55	16 81 00 933	60, 98, 112	16 93 00 060	. . . 58	29 02 00 504	. . . 4, 21
16 81 51 900	. . 67, 82	16 81 50 934	. . . 82	16 93 00 064	. . . 68	29 02 00 505	. . . 4, 21
16 81 51 901	. . . 82	16 81 50 936	. . . 67	16 93 00 501	. . . 35	29 10 00 001	. . . 7, 24
16 81 00 902	. . . 67	16 81 50 937	. . . 67	16 93 01 501	. . . 35	29 10 00 002	. . . 7, 24
16 81 00 903	. . 54, 112	16 81 50 938	. . . 67	16 93 00 502	. . . 68	29 10 00 003	. . . 6, 23
16 81 00 904	. . . 54	16 81 50 939	. . . 67	16 93 01 502	. . 68, 83, 96, 110	29 10 00 006	. . . 7, 23
16 81 00 905	. . . 54	16 81 50 940	. . . 67	16 93 00 507	. . . 68	29 10 00 007	. . . 7, 23
16 81 01 905	. . . 54	16 81 50 941	. . 67, 82	16 93 01 507	. . . 58		
16 81 02 905	60, 98, 112	16 81 50 942	. . . 67				
16 81 52 905	. . . 82	16 81 50 944	. . . 82				
16 81 00 906	. . . 54	16 81 50 945	. . . 82				

Order No.	page	Order No.	page	Order No.	page	Order No.	page
29 10 00 008	23	29 35 00 504	. 85, 101	29 44 00 001	. 89, 105	29 51 00 910	90
29 10 01 008	6	29 35 01 505	. 101	29 44 00 002	. 89	29 51 00 911	. 90, 92
29 10 00 009	6, 23			29 44 00 003	. 89	29 51 00 912	. 90, 92
29 10 00 010	24	29 36 00 501	. 85	29 44 00 004	. 89	29 51 00 913	. 90
29 10 01 010	7, 24	29 37 00 001	. 85	29 44 00 005	. 89, 99, 105, 113	29 51 00 914	. 90
29 10 00 011	7, 23	29 37 00 002	. 85, 111	29 44 00 006	. 89	29 51 00 915	. 90, 92
29 10 00 012	23	29 37 00 003	. 85, 111	29 44 00 501	. 89	29 51 00 916	. 90, 92
29 10 00 013	23	29 37 00 501	. 85	29 44 00 502	. 89	29 51 00 917	. 90
29 10 00 014	23			29 44 00 503	. 89	29 51 00 919	. 91
29 10 00 015	23	29 38 00 112	. 85, 101	29 44 00 504	. 89	29 51 00 920	. 91
29 10 00 501	23	29 38 00 015	. 85	29 44 00 505	. 89		
29 10 01 501	6	29 38 00 502	. 85	29 44 01 505	. 89, 105	29 52 00 001	. 93, 107
		29 38 00 503	. 85	29 44 00 507	. 89	29 52 00 002	. 93, 107
29 14 00 001	24	29 38 00 900	. 85	29 44 00 900	. 88	29 52 01 002	. 93, 107
		29 38 00 901	. 85	29 44 00 901	. 88	29 52 00 007	. 93, 107
29 16 00 002	10, 27	29 38 00 902	. 85	29 44 00 903	. 88	29 52 00 013	92, 93, 107
29 16 00 003	10, 27	29 38 00 903	. 85	29 44 00 904	. 88	29 52 00 015	. 90, 91, 92, 93
29 16 00 004	10, 27	29 38 00 904	. 85	29 44 00 905	. 88	29 52 00 016	. 93
29 16 00 005	10	29 38 00 905	. 85	29 44 00 906	. 88	29 52 00 017	. 93
29 16 00 501	10, 27			29 44 00 907	. 88	29 52 00 023	. 93
29 16 00 505	26	29 39 00 001	. 86	29 44 00 908	. 88	29 52 00 024	. 91, 93
29 16 00 901	26	29 39 00 002	. 86	29 44 00 909	. 88	29 52 00 509	. 93
29 16 00 902	26	29 39 00 028	. 86	29 44 00 910	. 88	29 52 01 512	. 93, 107
29 16 00 903	26	29 39 00 029	. 86	29 44 00 911	. 88	29 52 00 900	. 92
29 16 02 904	26	29 39 00 032	. 86	29 44 00 912	. 88	29 52 00 901	. 92
29 16 00 905	26	29 39 00 034	. 86			29 52 00 902	. 92
		29 39 00 507	. 86	29 51 00 006	. 91, 106	29 52 00 903	. 92
29 17 00 001	16	29 39 00 508	. 86	29, 51 00 012	. 91, 93, 106, 107	29 52 00 904	. 92
29 17 00 002	16	29 39 00 511	. 86	29 51 00 014	. 91, 93, 106, 107	29 52 00 905	. 92
		29 39 00 515	. 86	29 51 00 019	. 91, 106	29 52 00 906	. 92
29 19 00 001	17, 32	29 39 00 517	. 86	29 51 00 020	. 91, 93, 106, 107	29 52 00 907	. 92
29 19 00 002	17, 32	29 39 00 518	. 86	29 51 00 025	. 91, 93, 106, 107	29 52 00 908	. 92
29 19 00 004	16	29 39 00 900	. 86			29 52 01 909	. 93, 107
29 19 00 008	17, 32	29 39 00 901	. 86	29 51 00 501	. 91, 93, 106, 107	29 52 01 910	. 93, 107
29 19 00 502	17, 32			29 51 00 507	. 91	29 53 00 501	. 94
		29 41 00 013	. 84, 87, 100, 103	29 51 00 508	. 91, 93	29 53 00 900	. 94
29 31 00 020	84	29 41 00 015	. 87, 103	29 51 00 509	. 91		
29 31 00 023	84	29 41 00 016	. 87, 103	29 51 00 510	. 91	29 54 00 010	. 94, 108
29 31 00 504	84	29 41 00 018	. 87, 103	29 51 00 513	. 91, 93	29 54 00 501	. 94, 108
29 31 00 900	84	29 41 00 506	. 87, 103	29 51 00 600	. 90, 92	29 54 00 502	. 94, 108
		29 41 00 900	. 87, 103	29 51 00 900	. 90	29 54 00 503	. 94, 108
29 32 00 027	. 84, 100	29 41 00 901	. 87, 103	29 51 00 902	. 90		
29 32 00 501	. 84, 100			29 51 00 904	. 90, 92	29 56 00 005	. 95, 109
29 32 00 508	. 84, 100	29 43 00 004	. 88	29 51 00 905	. 90	29 56 01 005	. 95, 109
		29 43 00 005	. 88	29 51 00 906	. 90, 92	29 56 00 011	. 95, 109
29 33 00 501	. 84, 100	29 43 00 006	. 88	29 51 00 907	. 90, 92	29 56 00 014	. 95, 109
		29 43 00 007	. 88	29 51 00 908	. 90, 92	29 56 00 015	. 95, 109
29 35 00 005	. 85	29 43 00 502	. 88	29 51 00 909	. 90	29 56 00 016	. 95, 109
29 35 01 005	. 85	29 43 01 506	. 88			29 56 00 020	. 95, 109
29 35 00 009	. 85, 101	29 43 00 507	. 88				
29 35 00 010	. 85, 101	29 43 00 508	. 88				
29 35 00 501	. 85						
29 35 01 501	. 85, 101						

Order No.	page	Order No.	page	Order No.	page	Order No.	page
29 56 00 021	. 95, 109	29 80 00 501	. . . 98	29 93 00 901	. . . 99	39 39 00 005	. . . 112
29 56 00 501	. 95, 109	29 80 00 502	. . . 98	29 93 00 902	. . . 99	39 39 00 006	. . . 102
29 56 00 502	. 95, 109	29 80 00 503	. . . 98	29 93 00 903	. . . 99	39 39 00 010	. . . 100
29 56 00 506	. 95, 109					39 39 00 501	. . . 102
29 56 00 510	. 95, 109	29 81 01 002	. . . 98	35 09 00 015	. . . 16	39 39 00 502	. . . 102
29 56 01 510	. 95, 109	29 81 00 005	. . . 98				
		29 81 00 007	. . . 86	35 16 00 911	. . . 9, 26	39 43 00 001	. . . 104
29 57 00 015	. 95, 109	29 81 00 008	. . . 98			39 43 00 002	. . . 104
29 57 00 016	. 95, 109	29 81 00 504	. 98, 112	35 17 00 002	. 14, 16, 31	39 43 00 003	. . . 104
29 57 00 017	. 95, 109	29 81 00 505	. . . 98	35 17 00 504	. . . 15	39 43 00 004	. . . 104
29 57 01 017	. 95, 109	29 81 00 508	. 98, 112	35 17 00 900	. . . 15	39 43 00 501	. . . 104
29 57 00 021	. 95, 109	29 81 00 510	. . . 98	35 17 00 901	. . . 15	39 43 00 504	. . . 104
29 57 00 022	. 95, 109	29 81 01 510	. . . 112	35 17 00 902	. . . 15	39 43 00 505	. . . 104
29 57 00 023	. 95, 109	29 81 00 901	. 98, 112	35 17 00 904	. . . 15	39 43 00 507	. . . 104
29 57 00 024	. 95, 109	29 81 00 902	. 98, 112	35 17 00 906	. . . 15	39 43 00 900	. . . 104
29 57 00 025	. 95, 109	29 81 00 905	. 98, 112	35 17 00 907	. . . 16		
29 57 00 030	. 95, 109	29 81 00 907	. 98, 112	35 17 00 908	. . . 16	39 44 00 501	. . . 105
29 57 00 031	. 95, 109	29 81 00 908	. 98, 112	35 17 00 909	. . . 15	39 44 00 502	. . . 105
29 57 00 032	. 95, 109	29 81 00 909	. 98, 112	35 17 00 910	. . . 15	39 44 00 503	. . . 105
29 57 00 035	. 95, 109	29 81 00 910	. 98, 112	35 17 00 911	. . . 15		
29 57 00 501	. 95, 109	29 81 00 911	. 98, 112	35 17 00 912	. . . 15	39 71 00 003	. . . 111
29 57 01 501	. 95, 109	29 81 00 912	. 98, 112	35 17 00 913	. . . 15	39 71 00 501	. . . 111
29 57 00 502	. 95, 109	29 81 00 913	. 98, 112	35 17 00 914	. . . 16	39 71 00 502	. . . 111
29 57 00 506	. 95, 109	29 81 00 914	. 98, 112	35 17 00 915	. . . 16		
		29 81 00 918	. 98, 112			39 72 00 006	. . . 111
29 66 00 001	. 96, 110	29 81 00 919	. 98, 112	39 00 00 901	. . . 18	39 72 00 007	. . . 111
29 66 00 002	. 96, 110	29 81 00 920	. 98, 112			39 72 00 010	. . . 111
29 66 00 008	. . . 96	29 81 00 921	. 98, 112	39 01 00 002	. . . 20	39 72 00 011	. . . 111
29 66 01 011	. . . 96	29 81 00 923	. 98, 112	39 01 00 003	. . . 20	39 72 00 900	. . . 111
29 66 00 014	. . . 111	29 81 00 924	. 98, 112	39 01 00 018	. . . 100		
29 66 00 016	. 96, 110	29 81 00 925	. 98, 112			39 80 00 501	. . . 112
29 66 00 017	. . . 111			39 02 00 502	. . . 21	39 80 00 502	. . . 112
29 66 00 018	. . . 96	29 91 00 001	. 99, 113			39 80 00 503	. . . 112
29 66 00 019	. 96, 110	29 91 00 002	. 99, 113	39 16 00 001	. . . 27		
29 66 00 022	. 96, 110	29 91 00 501	. 99, 113	39 16 00 502	. . . 26	39 81 00 501	. . . 112
29 66 00 023	. 96, 110	29 91 00 900	. 99, 113	39 16 01 900	. . . 26		
29 66 00 026	. . . 96			39 16 00 901	. . . 26	39 93 00 900	. . . 113
29 66 00 027	. . . 96	29 92 00 001	. 99, 113			39 93 01 900	. . . 113
29 66 00 508	. 96, 110	29 92 00 503	. 99, 113	39 31 00 016	. . . 100		
29 66 00 510	. . . 96	29 92 00 504	. 99, 113	39 31 00 017	. . . 100	40 43 00 092	. . . 71
29 66 00 511	. 96, 110			39 31 00 505	. . . 100		
		29 93 00 003	. . . 99	39 31 00 900	. . . 100	40 56 00 017	. . . 99
29 71 00 001	. . . 97	29 93 00 011	. . . 99				
29 71 00 002	. 97, 111	29 93 00 012	. . . 99	39 37 00 501	. . . 101	40 66 00 216	. 96, 110
		29 93 00 015	. . . 99				
29 72 00 010	. . . 97	29 93 00 016	. . . 99	39 38 00 005	. . . 101	40 93 00 028	. . . 99
29 72 00 502	. . . 97	29 93 00 019	. 99, 101	39 38 00 007	. . . 101		
29 72 00 506	. . . 97	29 93 00 020	. . . 99	39 38 00 501	. . . 101		
29 72 00 900	. . . 97	29 93 00 501	. . . 99	39 38 01 502	. . . 101		
29 72 00 901	. . . 97	29 93 00 503	. . . 99	39 38 02 502	. . . 101		
		29 93 00 900	. . . 99	39 38 00 503	. . . 111		
				39 38 00 900	. . . 101		

Order No.	page	Order No.	page	Order No.	page	Order No.	page
DIN 7		DIN 86		DIN 137		DIN 660	
2,5 h 11x32	37	M 4x8	52, 66, 81, 97	A 3	38, 59, 68, 71, 100	3x5	96, 110
2,5 h 11x55	99	AM 4x8	111	A 4	14, 16, 17, 31, 32, 35, 54, 56, 58, 60, 70, 82, 99	3x6	38, 59, 86
4 h 8x6	16	AM 6x18	52, 97	B 4	14, 16, 31, 56, 70, 86, 102	3x10	90
DIN 63		DIN 88		A 5	17, 32, 35, 36, 38, 52, 56, 58, 59, 66, 81, 96, 97, 110, 111	3,5x8	35
AM 3x8	88	AM 5x20	85	B 5	10, 27, 96, 100	5x8	44
AM 4x8	16	M 6x18	3, 20	A 6	17, 32, 35, 52, 58, 68, 98	5x12	85, 101
DIN 84		M 6x30	20	B 6	3, 20, 35, 36, 48, 50, 51, 52, 56, 58, 61, 64, 65, 66, 79, 81, 85, 92, 93, 94, 97, 99, 101, 107, 108, 110, 111	5x32	84
M 2,6x6	82	M 6x50	3	A 7	46, 49, 63, 64, 71, 77, 79, 91, 93, 106, 107	DIN 835	
M 4x8	15	DIN 91		A 8	8, 14, 16, 25, 31, 37, 38, 59, 86, 87, 103	AM 7x85	2, 19
AM 4x8	13, 30	AM 4x8	99	B 8	101	DIN 912	
AM 4x10	13, 14, 16, 30, 31	AM 5x10	102	A 10	85, 101	M 8x22	72
M 4x10	15	M 5x12	104	B 10	6, 23, 85, 101	DIN 917	
M 4x12	11, 12, 28, 29	AM 5x18	88	B 12	85, 101, 111	M 4	99
AM 4x15	14, 16, 31	AM 6x10	68	DIN 433		DIN 922	
AM 4x16	13, 30	AM 6x12	99	4,3	11, 12, 15, 28, 29	M 4x5x1,6	82
M 4x18	11	AM 6x15	3, 20, 88, 104	8,4	54	DIN 923	
AM 4x19	13, 30	DIN 94		DIN 439		M 4x4	41, 42, 74, 104
M 4x20	11, 15, 28	1x12	60, 98, 112	BM 5	61, 88	M 5x8	61
AM 4x21	13, 30	1x15	82	M 6	40, 42, 73, 104	DIN 931	
M 4x22	11, 12, 15, 28, 29	2x15	51	BM 7	57	M 5x60	53
M 4x25	12, 29	3x18	35, 58	DIN 471		M 6x18	68
AM 4x25	13, 30	3x22	58, 68	11x1	8, 25	M 6x22	36
AM 5x10	100	DIN 125		12x1	16	M 6x25	73
DIN 85		3,2	68	14x1	34	M 6x36	39, 59
M 3x8	68	3,7	11, 12, 15, 28, 29	21x1,2	6, 23	M 6x48	3
AM 4x6	17, 32	4,3	35, 70	22x1,2	7, 24	M 6x50	20
M 4x8	35	5,3	96	24x1,2	7, 24	M 6x55	3, 20
4x8	56	6,4	41, 42, 56, 68, 70, 73, 76, 78, 80, 81, 83, 102, 104	DIN 472		M 6x65	3, 20
AM 4x10	86, 102	7,4	4, 21, 71, 81, 94, 108	32x1,2	3, 20	M 6x72	3, 20
M 4x10	70	8,4	34, 57, 71, 72	35x1,5	3, 20	M 6x75	101
AM 5x6	96, 110	10,5	69, 77, 79	DIN 553		M 6x80	3, 20
M 5x8	56	DIN 127		M 3x6	71	M 7x25	78
M 5x10	35, 36, 56, 58, 96	B 3	11, 12, 14, 15, 28, 29, 31	DIN 557		M 7x62	34
AM 5x10	17, 32	B 4	11, 12, 13, 15, 28, 29, 30, 35, 36, 70	M 8	84, 100	M 7x68	81
M 5x12	36	A 5	37, 49, 64, 79, 99	DIN 557		M 8x20	101
AM 5x12	99	B 5	56	M 8	84, 100	M 8x30	92
M 5x15	56	A 6	52, 85, 96, 97	DIN 557		M 8x45	41, 42
AM 5x15	17, 32	B 6	70, 80, 81, 83	M 8	84, 100	M 8x66	39
AM 6x6	61	A 8	87, 103	DIN 557		M 8x190	86
RIM 6x8	2, 19	B 8	82, 85, 88, 104	DIN 557		DIN 933	
AM 6x15	104	B 10	85	M 8	84, 100	M 3x9	14, 15, 31
AM 6x18	17, 32	B 12	7, 24	DIN 557		M 3x10	11, 12, 28, 29
AM 6x20	56	A 14	84, 100	M 8	84, 100	M 5x18	52, 60, 66, 81, 97, 111
BM 6x38	17, 32						
M 6x55	3, 20						

DIN 933

M 6x6	58, 94, 108
M 6x8	35, 61, 65
M 6x10	51, 58, 70, 80
M 6x12	20, 35, 52, 58, 70, 83, 85, 94, 96, 97, 101, 108, 110, 111
M 6x15	35, 66, 85, 86, 102
M 6x16	36, 56
M 6x18	68, 70, 81, 97
M 6x20	81
M 6x25	70
M 7x15	34, 37, 38, 71, 96, 110
M 7x18	34
M 7x20	71
M 8x10	54
M 8x12	82
M 8x18	39, 59, 88
M 8x20	104

DIN 934

M 3	11, 12, 14, 15, 28, 29, 31, 68
M 4	17, 32, 35, 58, 70, 102
M 5	10, 27, 35, 36, 40, 41, 42, 51, 52, 56, 57, 58, 61, 66, 67, 73, 74, 80, 81, 82, 85, 88, 94, 96, 97, 100, 102, 104, 108, 111
M 6	3, 20, 35, 36, 39, 48, 50, 52, 56, 59, 64, 68, 70, 73, 76, 79, 81, 85, 92, 93, 97, 99, 101, 102, 107, 110, 111

DIN 934

M 7	4, 7, 21, 24, 34, 71, 78, 81, 101
M 8	39, 85, 86, 88, 92
M 8x1	8, 14, 25, 31
M 10	69, 85

DIN 936

M 8x1	90, 92
M 10x1	6, 23, 85, 101
M 12x1,5	69
M 14x1,5	84, 100

DIN 938

AM 6x65	3
---------	---

DIN 940

M 6x62	3
M 6x70	3

DIN 960

M 10x1x35	69
M 10x1x75	85
M 10x1x115	85, 101

DIN 961

M 12x1,5x15	101
-------------	-----

DIN 985

M 3	10
M 6	56

DIN 1476

2x3	33, 56, 69, 84, 100
2,3x6	111
2,6x3	44, 47
2x6	111
3x8	71

DIN 1587

M 8	41, 42, 71
-----	------------

DIN 3402

D 6	37, 38, 57, 59, 87, 103
-----	-------------------------

DIN 6797

J 5,3	40, 41, 42, 61, 73, 74, 88
5,3	42, 104
J 6,4	61, 102
J 8,4	1, 18

DIN 6798

A 4,3	13, 30, 98
J 4,3	52, 66, 81, 97, 111
A 5,3	53, 66, 67, 82,
J 5,3	85, 102
A 6,4	3, 20, 39, 56, 58
A 7,4	57
A 8,4	39, 41, 42, 54, 59
J 8,4	90, 92

DIN 6799

4	15, 89, 105
5	7, 8, 24, 25, 51, 66, 94, 108
6	95, 109
7	57

DIN 6888

2x3,7	14, 16, 31
3x3,7	6, 23

DIN 7338

B 3x7	91, 93, 106, 107
-------	------------------

DIN 7341



A 3 h 11x22	4, 21
-------------	-------

DIN 7603


A 6x12	2, 19
A 8x12	2, 19
A 10x14	81


DIN 7973

B 4,2x13	86
B 4,2x19	86, 99

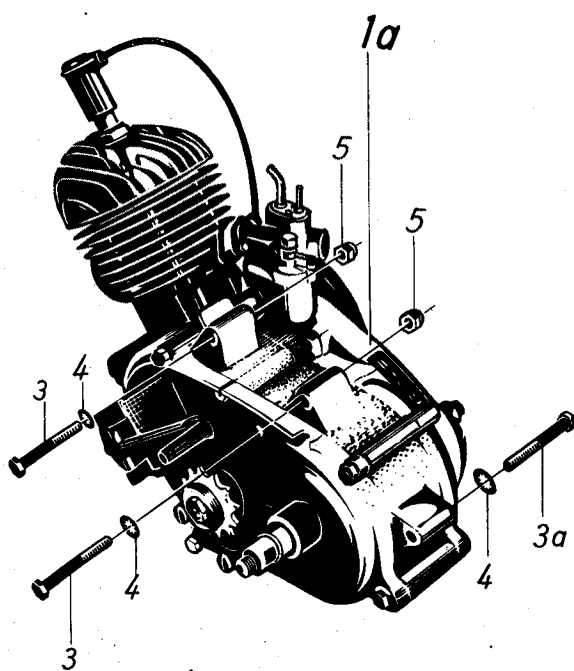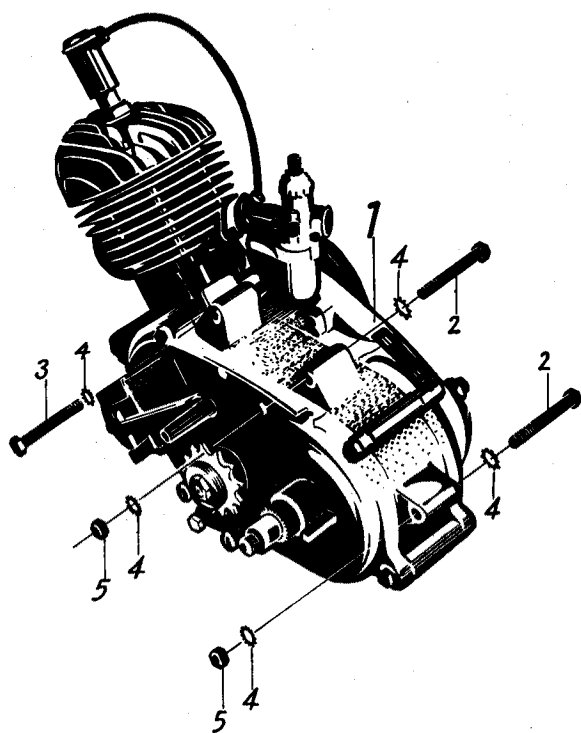


Description	Order-No.	Quantity	Remarks	Illustr.-No.		
QUICKLY						
		2 Gears				
		N-S	L	T		
	1 2 3 4					
Crankcase	16 01 00 504	1	1		in case of vehicles prior to frame/engine number 501 834 / 545 056 order additionally 2 Bolts (M8) 16 01 00 038, 1 Bolt (M8) 16 01 00 039, 3 Lock washers J 8,4 DIN 6797 and 3 Locking nuts 083 871 012. Rebore engine mounting holes in frame and carrying handle to 8,3 mm diam. Remove the threaded projection at the frame.	
Crankcase	29 01 01 502			1		
Crankcase half, left	16 01 01 502	1	1	1		6
Stud	AM 7x85 DIN 835	2	2	2		7
Leat spring	16 01 01 022	1	1	1	1 mm	8
Rivet	075 752 027	2	2	2		—
Crankcase half, right	16 01 00 901	1	1			9
Crankcase half, right	29 01 00 900			1		—
Stud	AM 7x85 DIN.835	2	2	2		10
Bush	16 01 00 005	2	2		→ 164 546 / 176 279	11
Bush	16 01 00 026	1	1	1		12
Clevis link	16 01 00 007	1	1		→ 92 805 / 99 003	13
Layshaft	16 01 02 004	1	1	1	In case of vehicles prior to frame/engine 82 401 / 87 963 grind down shoulder on gear wheel for 1st and 2nd gear 1 mm. Replace by washer 16 10 00 007 (1 mm thick)	14
Seal ring	A 8x12 DIN 7603	1	1	1		15
Screw plug	16 01 00 025	1	1	1		16
Cover, left	16 01 00 500	1	1			17
Cover, left	29 01 00 902			1		—
Seal ring	16 01 00 028			1	21x28x5,5 mm	—
Seal ring	A 8x12 DIN 7603	1	1	1		18
Screw plug	16 01 00 025	1	1	1		19
Seal ring	A 6x12 DIN 7603	1	1	1		20
Screw	RiM 6x8 DIN 85	1	1	1		21

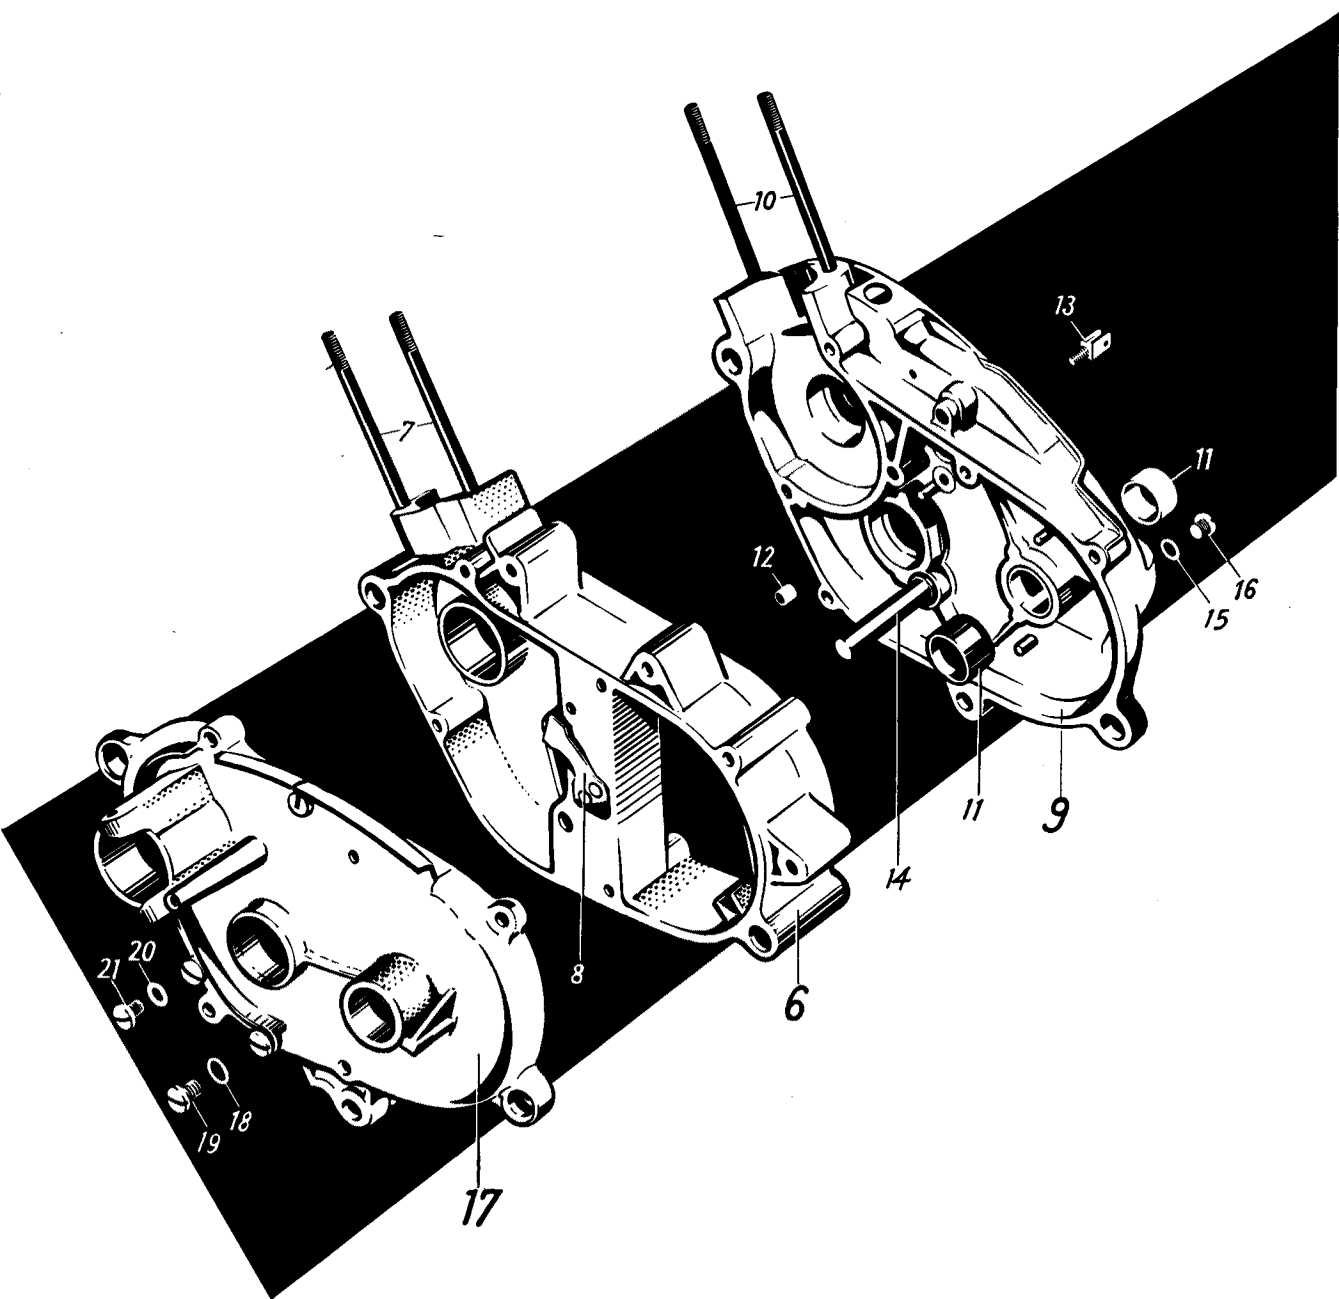


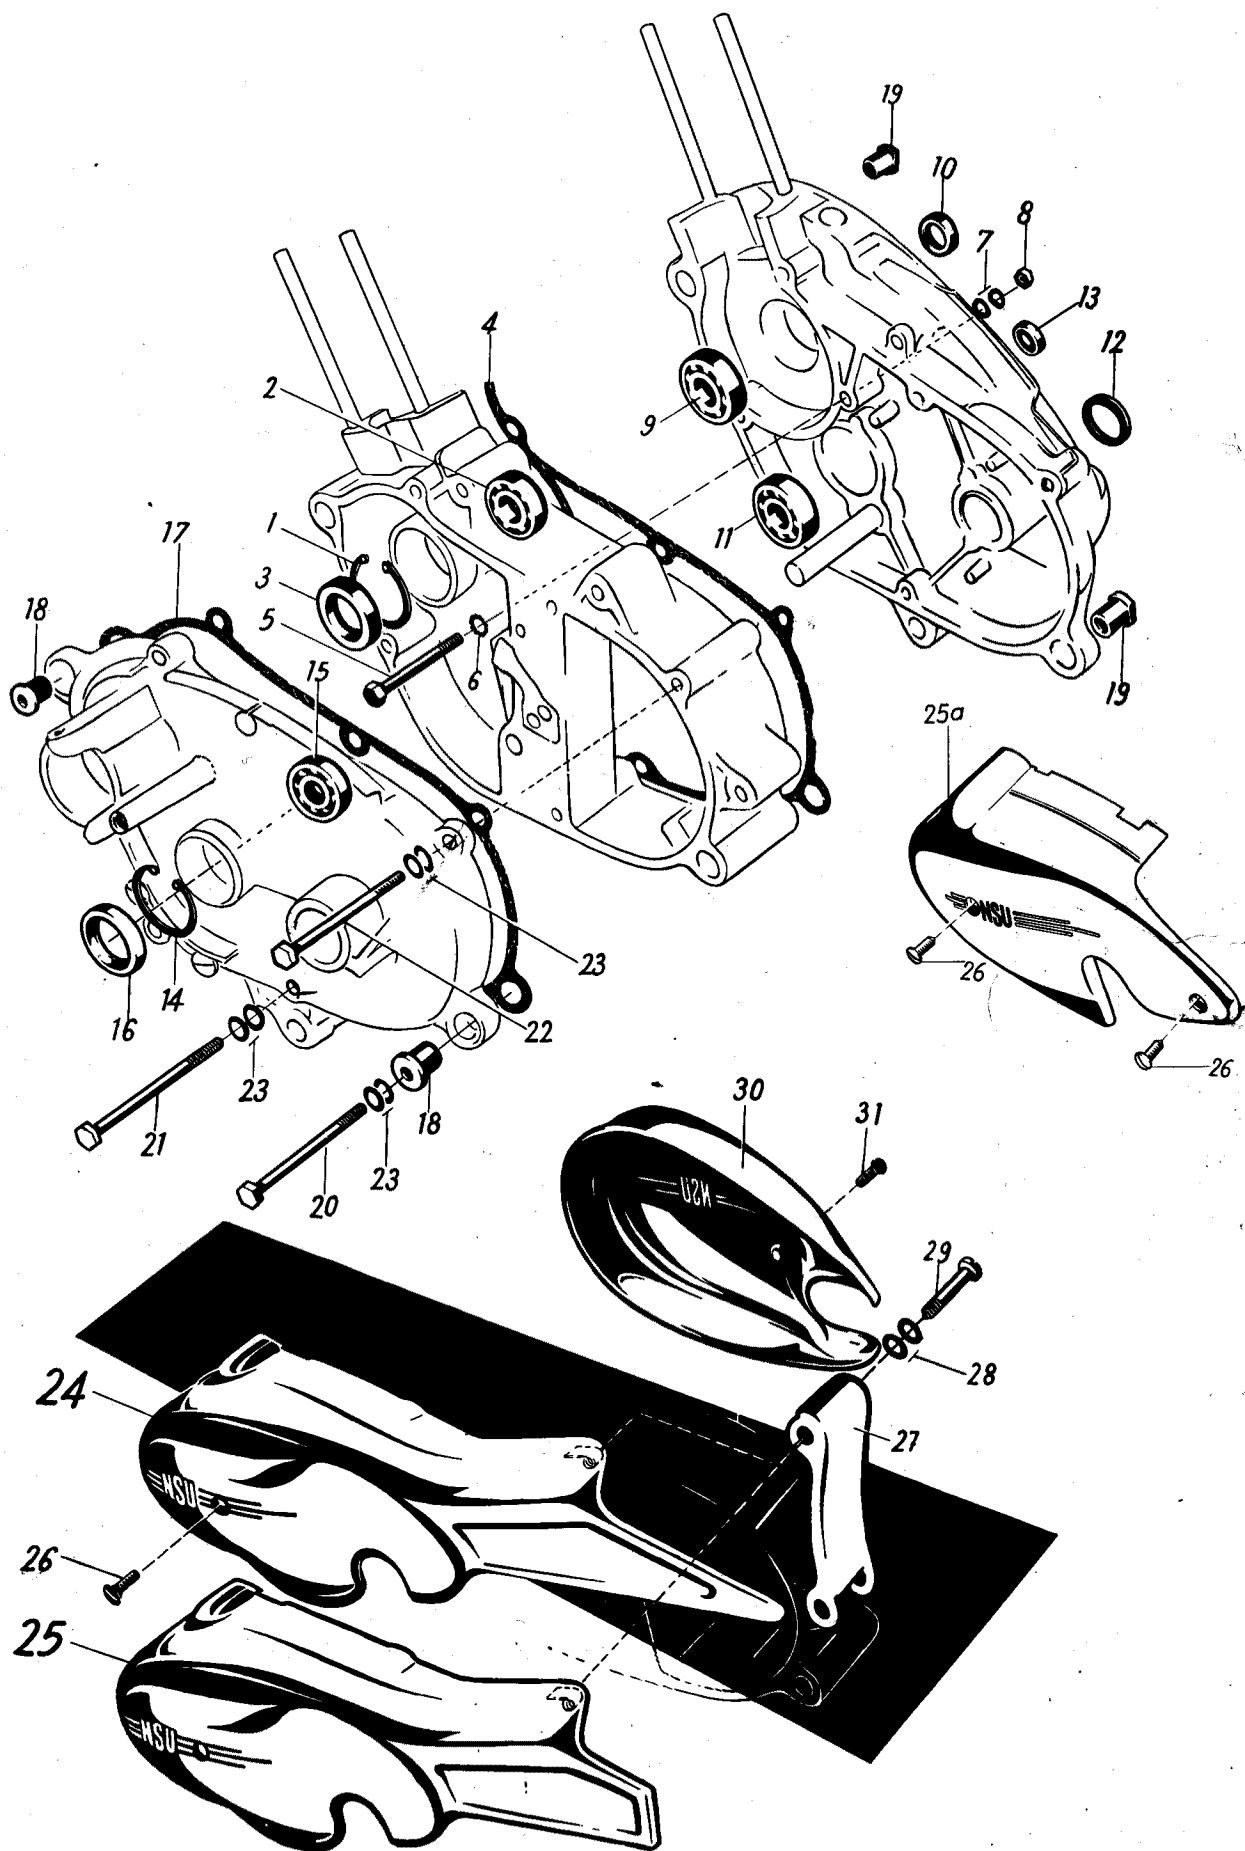

Description	Order-No.	Quantity			Remarks	Illustr.-No.	
QUICKLY							
		2 Gears					
		N-S	L	T			
Additional parts for left crankcase half							
Circlip	35x1,5 DIN 472	1	1	1		1	
Bearing	011 055 770	1	1	1	15x35x11 mm	2	
Seal ring	16 01 00 034	1	1	1	20x35x7 mm	3	
Gasket	16 01 00 015	1	1	1		4	
Bolt	M 6x48 DIN 931	1	1	1		5	
Lock washer	A 6,4 DIN 6798	1	1	1		6	
Spring washer	B 6 DIN 137	2	2	2		7	
Nut	M 6 DIN 934	1	1	1		8	
Additional parts for right crankcase half							
Bearing	011 055 770	1	1	1	15x35x11 mm	9	
Seal ring	16 01 00 033	1	1	1	15x24x7 mm	10	
Bearing	021 105 512	1	1	1	12x32x10 mm	11	
Seal ring	16 01 00 028	1	1		21x28x5,5 mm	12	
Seal ring	16 01 00 027	1	1	1	6x13x4,5 mm	13	
Additional parts for left-hand cover							
Circlip	32x1,2 DIN 472	1	1	1		14	
Bearing	021 105 512	1	1	1	12x32x10 mm	15	
Seal ring	091 901 032	1	1		22x32x7 mm → 20 693 / 21 025	—	
Seal ring	—	1	1		26x32x7 mm s. page 6 repair-type	—	
Seal ring	16 01 00 032	1	1	1	12x32x7 mm 20 694 / 21 026 →	16	
Gasket	16 01 00 014	1	1	1		17	
Crankcase assembling parts							
Sleeve	16 01 00 017	1	1		} not supplied order screws	s. Illustr. No. 19 —	
Sleeve	16 01 00 008	3	3			—	
Stud	AM 6x65 DIN 938	1	1			—	
Stud	M 6x70 DIN 940	5	5			—	
Stud	M 6x62 DIN 940	1	1			→ 193 540 / 208 745 —	
Bolt	M 6x72 DIN 931	1	1		}	—	
Spring washer	B 6 DIN 137	16	16			—	
Nut	M 6 DIN 934	8	8			—	
Sleeve	16 01 00 008	2	2	2		193 541 / 208 746 →	18
Sleeve length of thread = 6,5 mm	16 01 00 017	2	2			193 541 / 208 746 → → 791 755 / 853 395	19
Sleeve length of thread = 22,5 mm	16 01 00 017	2	2	2	791 756 / 853 396 →	—	
Bolt	M 6x65 DIN 931	2	2		193 541 / 208 746 → → 791 755 / 853 395	20	
Bolt	M 6x55 DIN 931	2	2	2	791 756 / 853 396 →	—	
Bolt	M 6x80 DIN 931	5	5	5	}	21	
Bolt	M 6x72 DIN 931	1	1	1		193 541 / 208 746 →	22
Spring washer	B 6 DIN 137	16	16	16		23	
Gasket set	16 01 00 900	1	1			—	
Gasket set	29 01 00 905			1		—	
Chain cover	16 01 00 501	1				24	
Chain cover	16 01 01 501		1			25	
Chain cover	29 01 00 001			1		25a	
Spacer	16 01 00 011	1	1		}	→ 62 700 / 66 989 —	
Pointed screw	M 6x50 DIN 88	1	1			—	
Screw	AM 6x15 DIN 91	1	1	2	62 701 / 66 990 →	26	
Coverplate	16 01 00 505	1	1			27	
Spring washer	B 6 DIN 137	2	2			28	
Pointed screw	M 6x55 DIN 85	1	1			29	
Cover, right	16 01 00 009	1	1			30	
Spacer	16 01 00 011	1	1		}	→ 78 000 / 82 792 —	
Pointed screw	M 6x50 DIN 88	1	1			—	
Screw	M 6x18 DIN 88	1	1			78 001 / 82 793 →	31


Description	Order-No.	Quantity	Remarks	Illustr.-No.		
QUICKLY						
		2 Gears				
		N-S	L	T		
	1 2 3					
Cylinder with piston	16 02 00 502	1	1		height of the cylinder 60,6 mm	—
Cylinder with piston	29 02 00 503			1	height of the cylinder 59,6 mm	—
Cylinder	16 02 00 500	1	1		} not supplied separately	1
Cylinder	29 02 00 504			1		—
Stud	16 02 00 008	2	2			2
Stud	16 02 01 008			2		—
Gasket	16 02 00 006	1	1	1		3
Cylinder head	16 02 00 501	1	1		} → 482 754 / 522 989. no supplied, order 16 02 01 501 and Bowdencable 16 44 01 504	—
Cylinder head	16 02 01 501	1	1			482 755 / 522 990 →
Cylinder head	29 02 00 505			1		—
Valve	16 02 00 004	1	1		→ 482 754 / 522 989	5
Valve	16 02 01 004	1	1		{ L = 44 mm 482 755 / 522 990 →	—
Valve	29 02 00 006			1		L = 43 mm (with groove)
Packing	16 02 00 009	1	1	1		7
Cap	16 02 00 010	1	1	1		8
Spring	011 095 858	1	1		} → 482 754 / 522 989	9
Thrust plate	16 02 00 005	1	1			10
Spring	16 02 00 016	1	1	1	} 482 755 / 522 990 →	11
Washer	16 02 00 015	1	1	1		12
C-washer	11 17 10 993	1	1	1		13
Release lever	16 02 01 013	1	1		{ 482 755 / 522 990 → for repair	—
Release lever	29 02 00 003			1		14
Rivet	A3h11x22DIN7341	1	1	1		15
Circlip	29 02 00 002			1		—
Sparking plag adaptor	081 802 089	1	1	1	for repair	—
Gasket	16 02 00 007	1	1	1		16
Washer	7,4 DIN 125	4	4	4		17
Nut	M 7 DIN 934	4	4	4		18

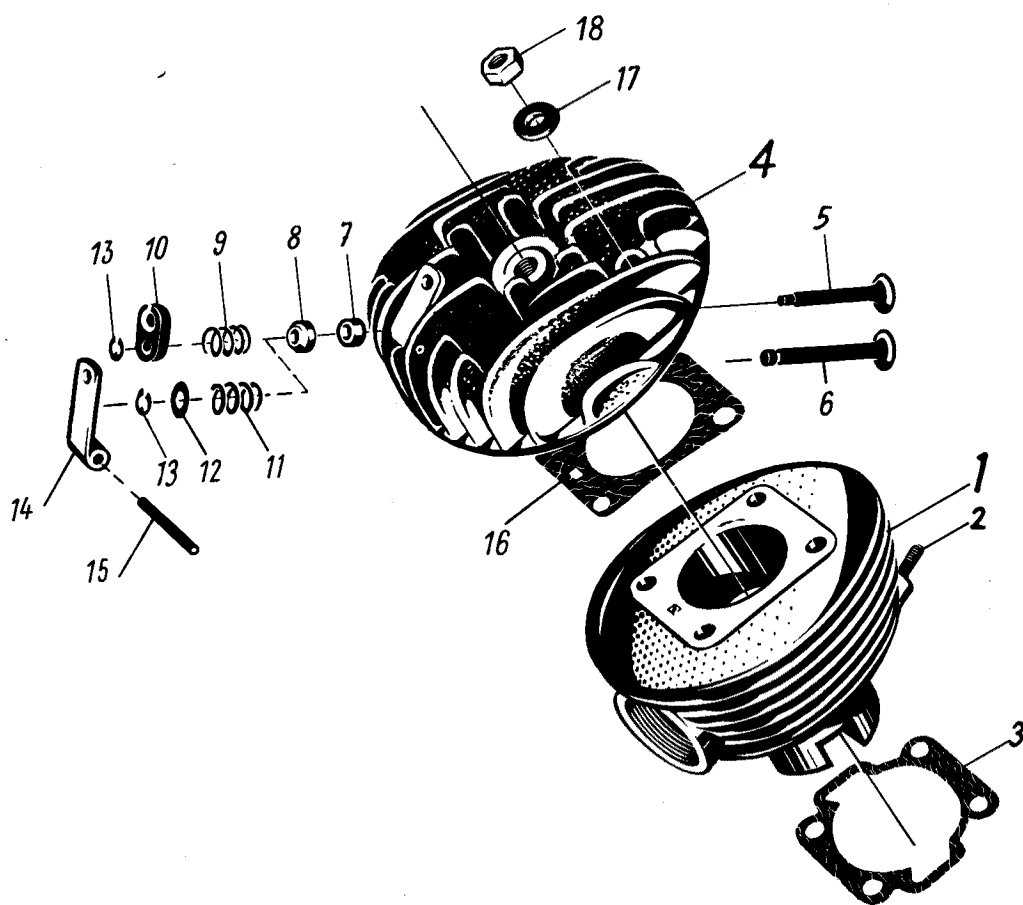


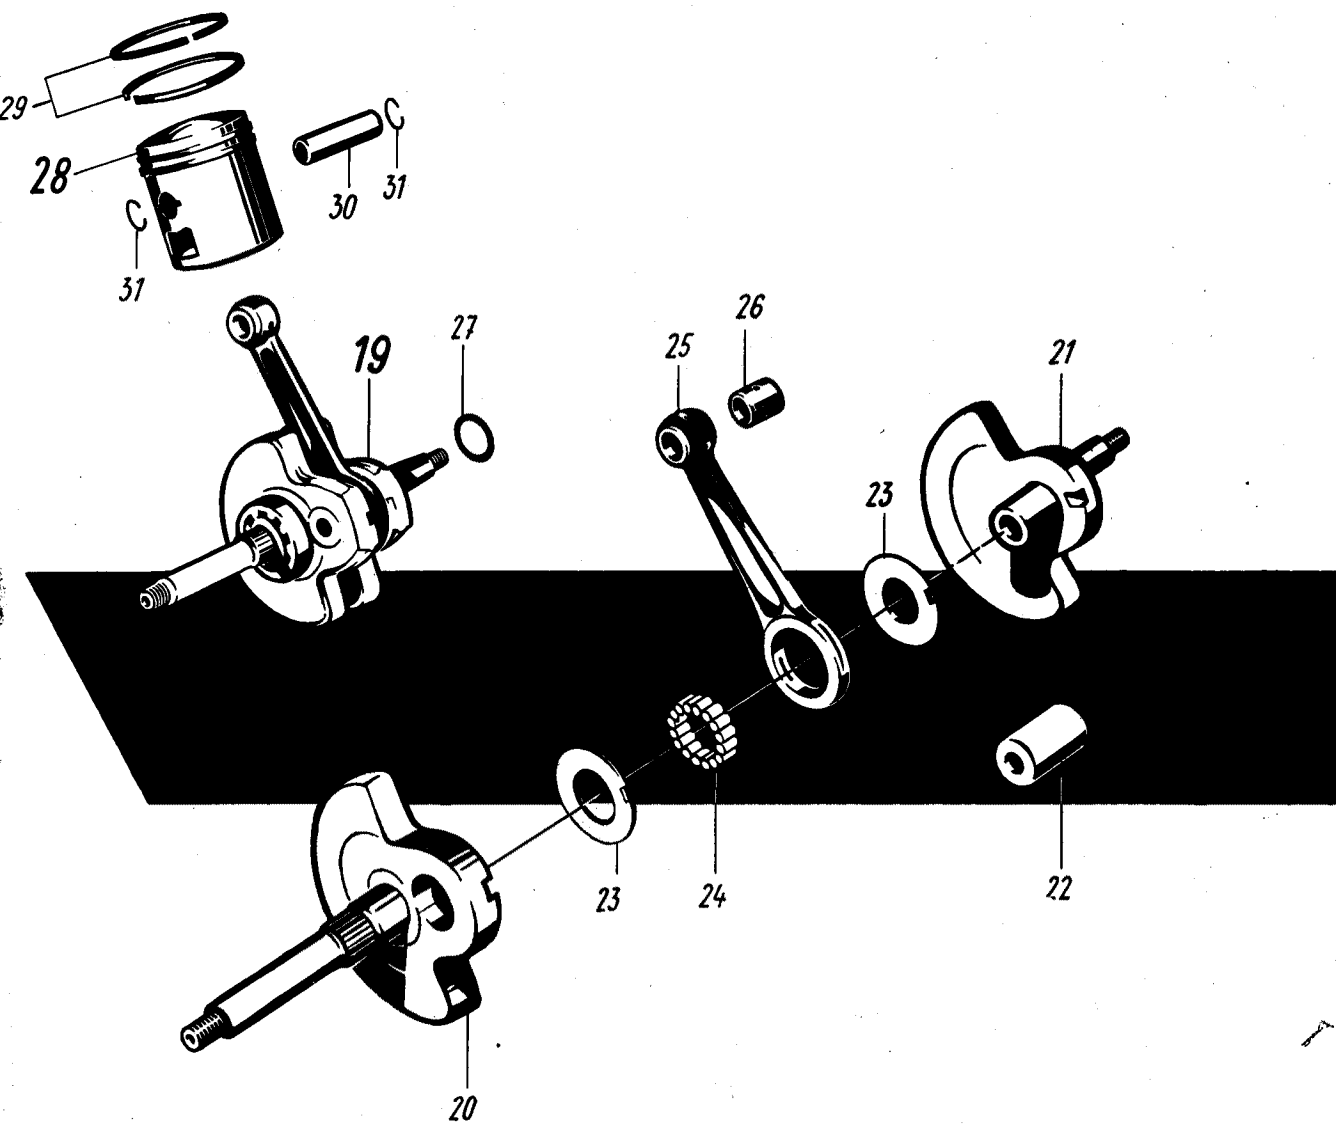

Description	Order-No.	Quantity			Remarks	Illustr.-No.
QUICKLY						
		2 Gears				
		N-S	L	T		
Flywheel assy	16 04 02 504	1	1	1		19
Ball bearing	—	2	2	2	15x35x11 mm s. page 3, Illustr.-No. 2, 9	—
Flywheel	16 04 02 011	1	1	1	} as req.	20
Flywheel	16 04 01 901	1	1	1		21
Crankpin	16 04 00 004	1	1	1		22
Washer	16 04 01 007	2	2	2		23
Roller	16 04 00 600	16	16	16		24
Roller	16 04 00 600	16	16	16		+ 0,004 4x6 DIN 5402
Roller	16 04 00 600	16	16	16		return flywheel assy
Roller	16 04 00 600	16	16	16		+ 0,002 4x6 DIN 5402
Roller	16 04 00 600	16	16	16		— 0,002 4x6 DIN 5402
Roller	16 04 00 600	16	16	16		— 0,004 4x6 DIN 5402
Roller	16 04 00 600	16	16	16	— 0,006 4x6 DIN 5402	
Connecting rod	16 04 01 502	1	1	1		25
Bush	16 04 00 003	1	1	1		26
Shim	012 098 209	as req.	as req.		{ 15,2x22x0,2; 0,35 mm NSL → Engine No. 952 268	27
Shim	16 04 00 015	as req.	as req.	as req.	16,9x22x0,2 mm	—
Shim	16 04 00 016	as req.	as req.	as req.	16,9x22x0,3 mm	NSL Engine No. 952 269 →
Shim	16 04 00 017	as req.	as req.	as req.	16,9x22x0,5 mm	—
Piston w/Cylinder	16 02 00 502	1	1			—
Piston w/Cylinder	29 02 00 503			1		—
Piston	16 04 00 503	1	1	1	{ 40 mm Ø not supplied separately	28
Piston ring	16 04 00 010	2	2	2		29
Grooved stud	16 04 00 014	2	2	2		—
Gudgeon pin	16 04 00 009	1	1	1		30
Circlip	16 04 00 013	2	2	2		31

Description	Order-No.	Quantity			Remarks	Illustr.-No.
QUICKLY						
		2 Gears				
		N-S	L	T		
Main shaft	16 10 00 507	1	1		98 mm long → 20 693 / 21 025	—
Main shaft	16 10 01 507	1	1	1	107 mm long 20 694 / 21 026 →	1
Bearing	021 105 512	2	2	2	12x32x10 mm s. page 3	2
Gear	16 10 00 004	1	1		24 No of teeth (inner diam 12 mm) → 20 693 / 21 025	—
Washer	16 10 00 022	as req.	as req.	as req.	12,1x23x0,5 mm	3
Washer	16 10 00 057	as req.	as req.	as req.	12,1x23x0,6 mm	—
Washer	16 10 00 058	as req.	as req.	as req.	12,1x23x0,7 mm	—
Washer	16 10 00 047	as req.	as req.	as req.	12,1x23x0,8 mm	—
Washer	16 10 00 059	as req.	as req.	as req.	12,1x23x0,9 mm	—
Gear	16 10 01 004	1	1	1	24 No of teeth (inner diam 15 mm) 20 694 / 21 026 →	4
Bush	16 10 00 028	1	1	1		12x15x10 mm
Washer	16 10 00 029	1	1	1	12,4x17,8x1 mm	6
Dog	16 10 01 003	1	1	1		7
Gear	16 10 01 502	1	1	1	18/80 No of teeth	8
Gear	16 10 00 401	1	1		→ 475 572 / 515 366	—
Gear	16 10 01 401	1	1		475 573 / 515 367 →	—
Washer	16 10 00 022	1	1	1	12,1x23x0,5 mm	9
Woodruff key	3x3,7 DIN 6888	1	1	1		10
Sprocket	16 10 00 009	1	1		12 No of teeth is not supplied order repair type (16 10 02 009, 16 10 00 031 and 16 10 00 033) 22x32x7 mm s. page 3 → 20 693 / 21 025	—
Sealring in cover left	—	1	1			
Seal ring	16 10 00 027	1	1		observe 9x14 mm	11
Sprocket	16 10 02 009	1	1		12 No of teeth	
Seal ring	16 10 00 031	1	1		26x32x7 mm { replacement (repair type) for 16 10 00 009 }	→ 20 693/21 025
Circlip	16 10 00 033	1	1			
Sprocket	16 10 01 009	1	1	1	12 No of teeth	12
Seal ring	—	1	1	1	12x32x17 mm s. page 3 illustr. No. 16	20 694/21 026 →
Sprocket	16 10 00 036	optional	optional	optional	13 No of teeth	—
Spring washer	B 10 DIN 137	1	1	1		13
Nut	M 10x1 DIN 936	1	1	1		14
Gear	16 10 01 501	1	1	1	for vehicles prior to 82 401 / 87 963 order also 1. washer 16 10 00 035	15
Washer	16 10 00 007	2	2			10,2x17x1 mm → 82 400 / 87 962
Washer	16 10 00 007	1	1		10,2x17x1 mm 82 401 / 87 963 →	16
Washer	16 10 00 035	1	1		→ 493 383 / 535 583	17
Washer	16 10 00 007	1	1	1	10,2x17x2 mm 10,2x17x1 mm 493 384 / 535 584 →	—
Crank axle, compl.	16 10 00 503	1	1			18
Crank axle	16 10 00 010	1	1			19
Gear	16 10 00 012	1	1		80 No of teeth	20
Spacer	16 10 00 015	1	1			21
Crank axle	29 10 01 501			1		—
Crank axle	29 10 00 003			1		21a
Gear	29 10 01 008			1		21b
Spacer	29 10 00 009			1		21c
Circlip	21x1,2 DIN 471			1		21d

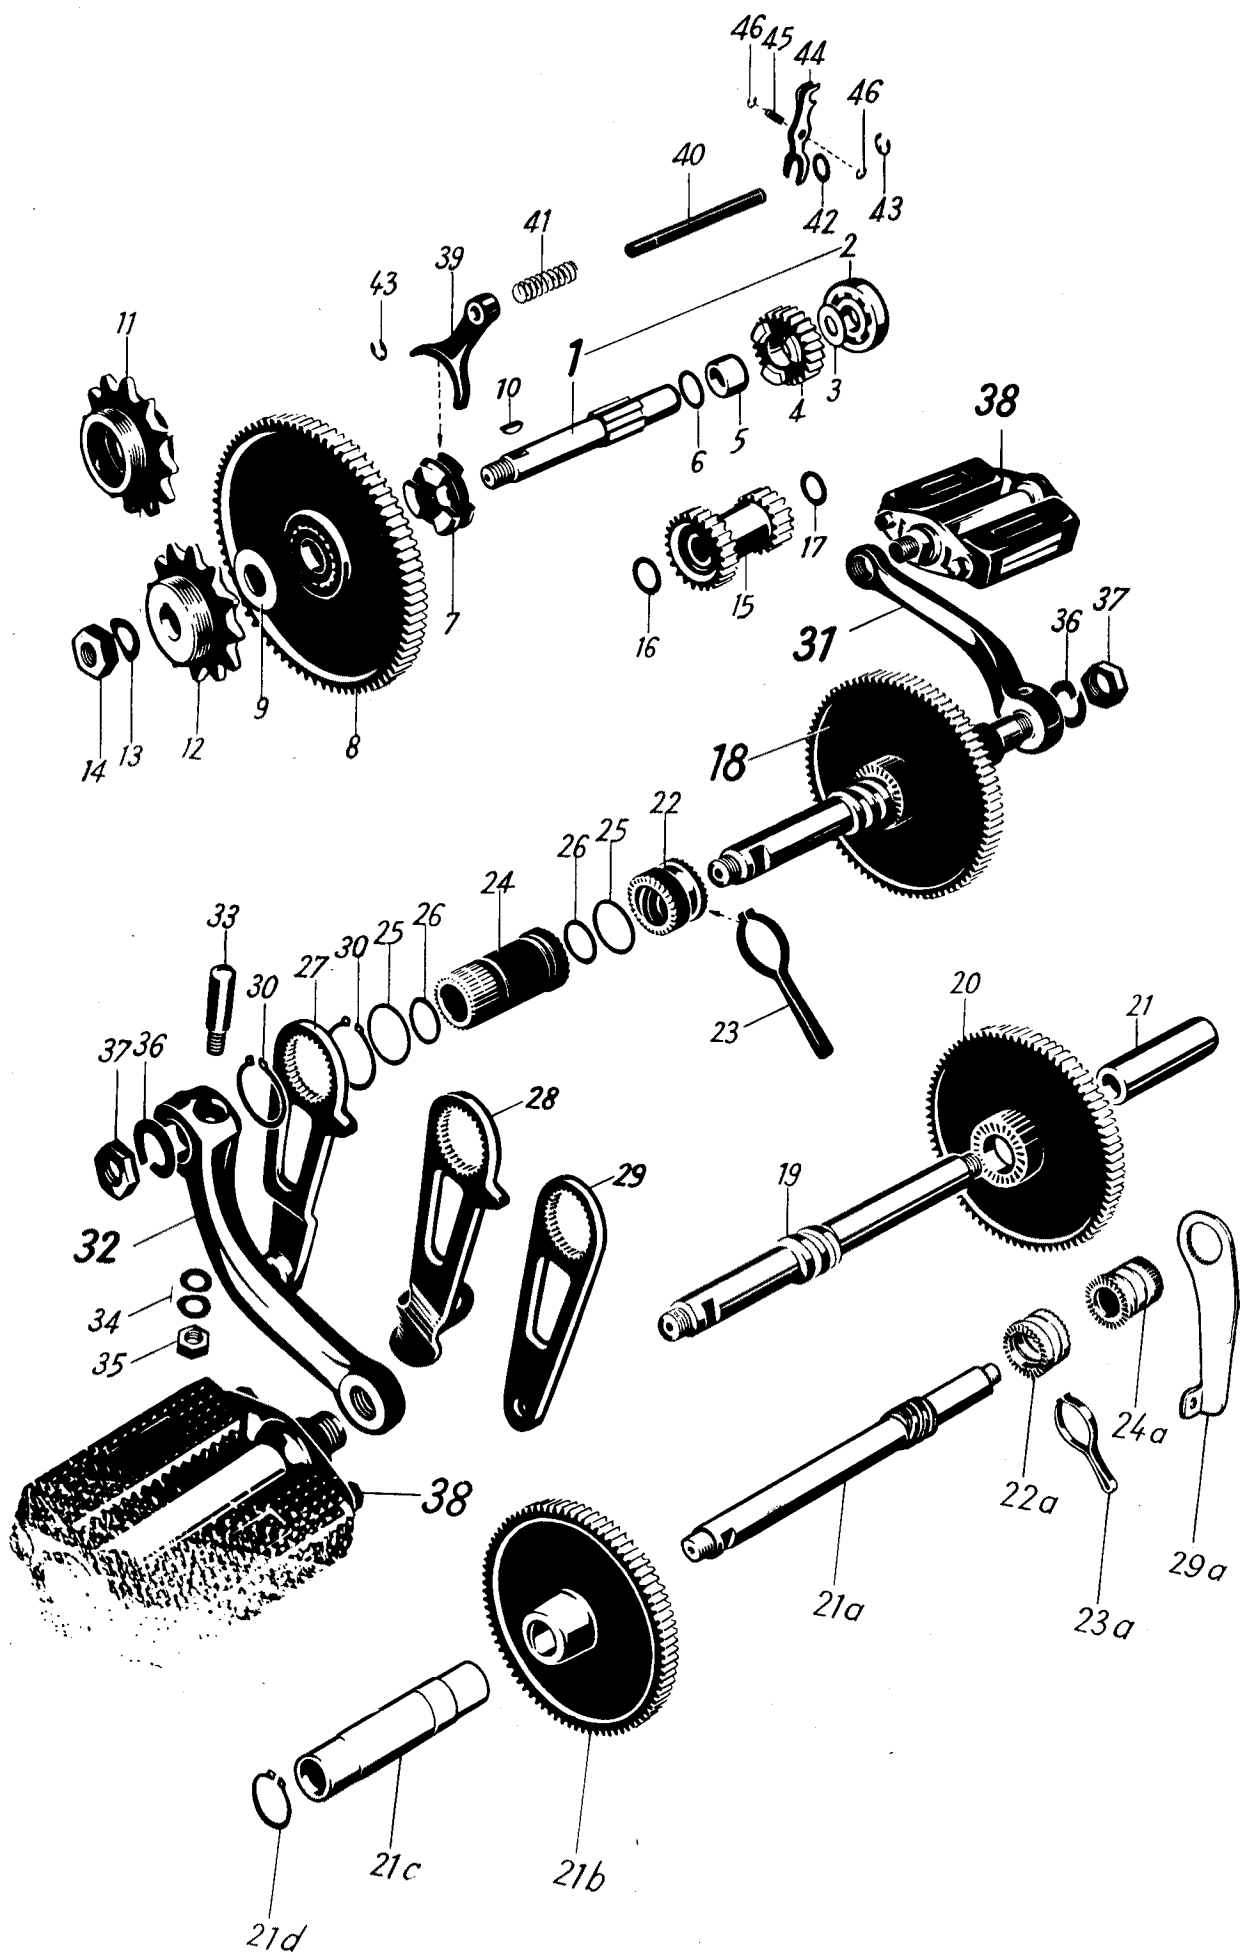

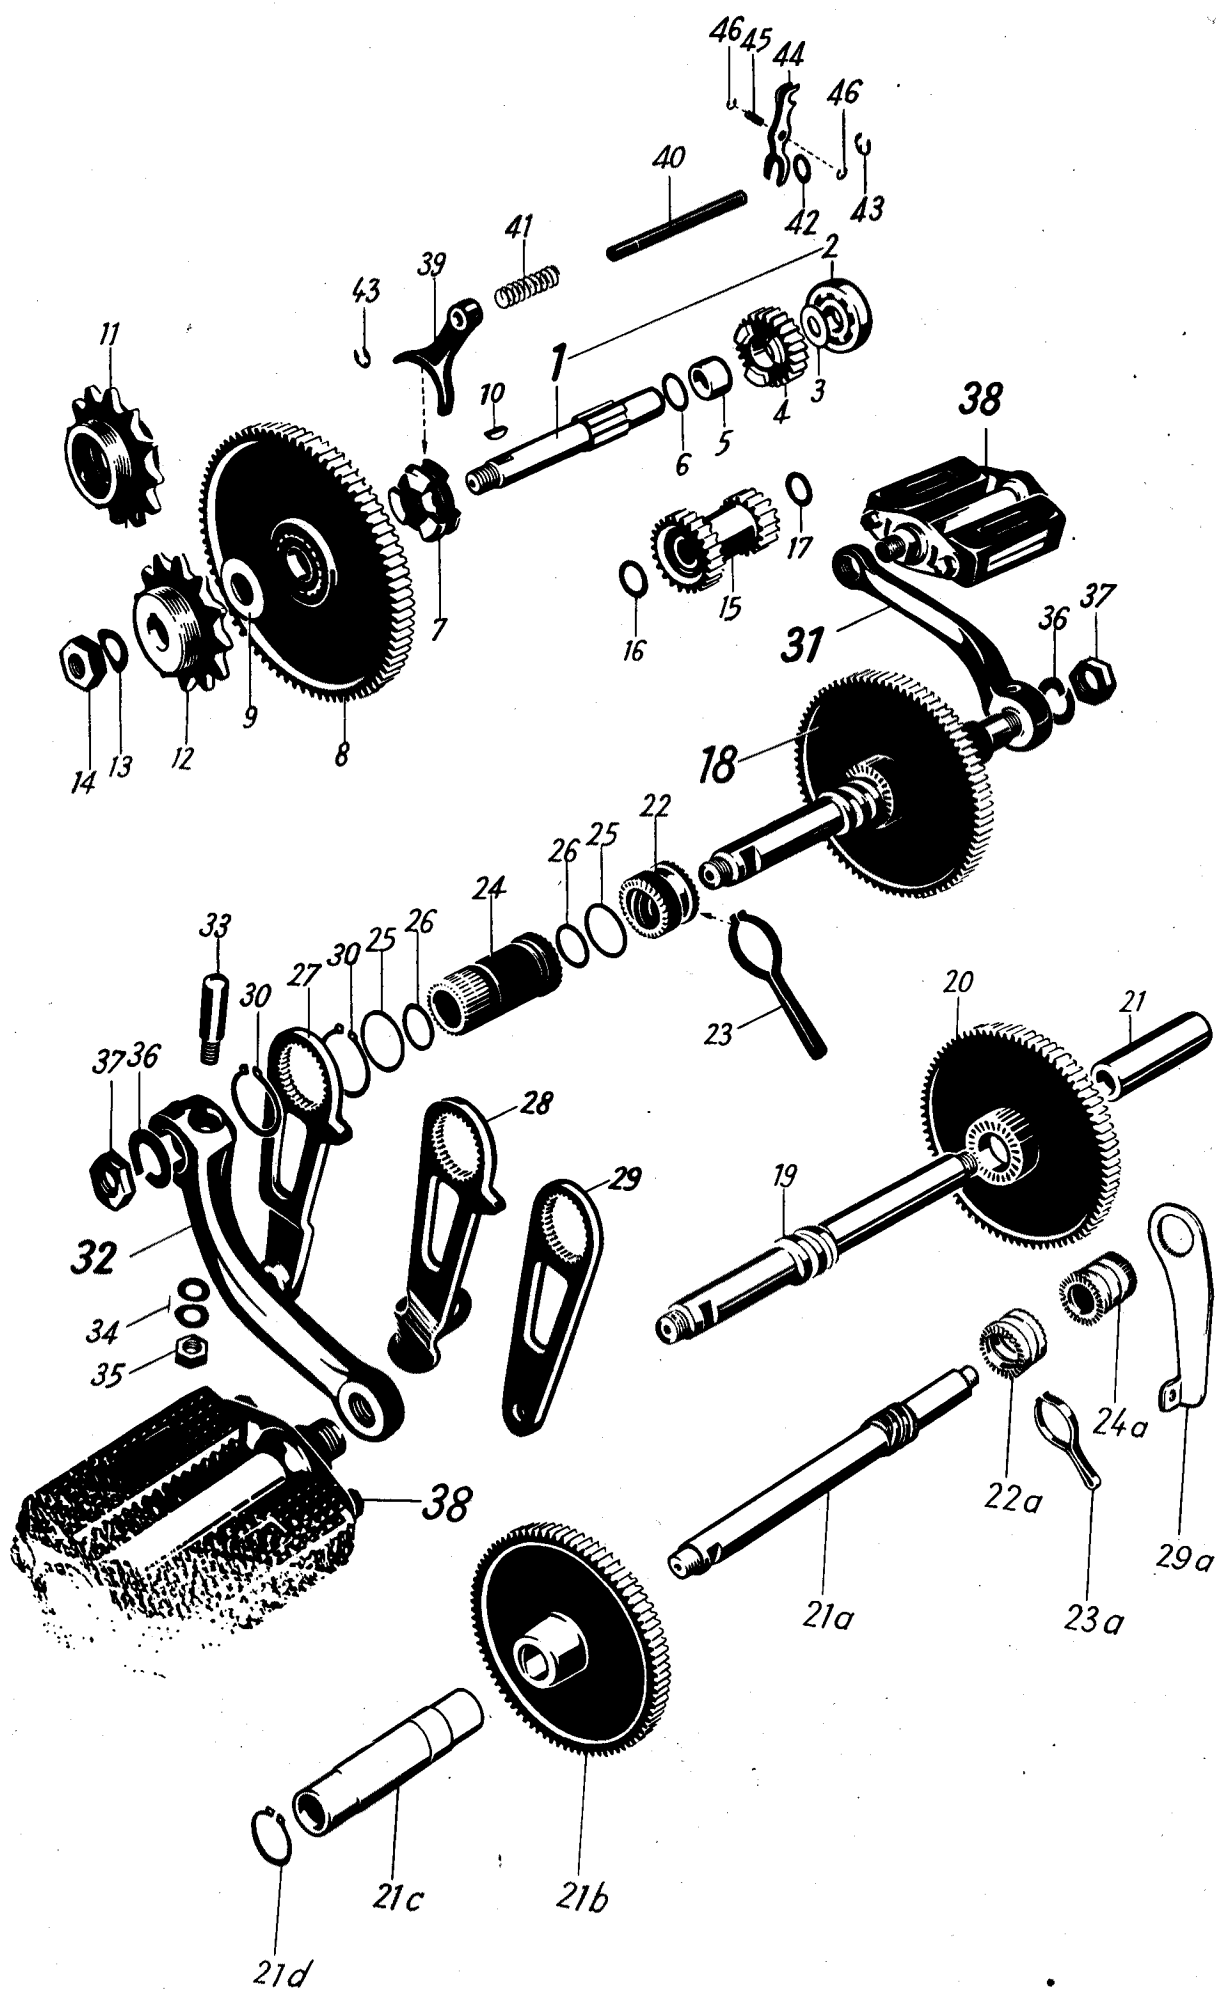


Description	Order-No.	Quantity			Remarks	Illustr.-No.
QUICKLY						
		2 Gears				
		N-S	L	T		
Driver	16 10 00 011	1	1			22
Driver	29 10 00 007			1		22a
Spring	16 10 00 019	1	1			23
Spring	29 10 00 011			1		23a
Locking member	16 10 00 013	1	1			24
Locking member	29 10 00 006			1		24a
Seal ring	16 10 00 025	2	2	2		25
Seal ring	16 10 00 026	2	2	2		26
Brake operating lever	16 10 00 504	1	1		117 mm long → 50 340 / 52 750	—
Brake operating lever	16 10 01 014	1	1		{ 105 mm long 50 341 / 52 751 → → 482 754 / 522 989 (angled eyelet) 482 755 / 522 990→	27
Brake operating lever	16 10 03 014	1				28
Brake operating lever	16 10 04 014		1			29
Brake operating lever	29 10 01 010			1		29a
Circlip	24x1,2 DIN 471	2	2	1		30
Circlip	22x1,2 DIN 471			1		—
Shim	16 10 00 402	as req.	as req.	as req.	16,1x21x0,2; 0,4 mm for repair	—
Crank, right	16 10 00 016	1	1			31
Crank, right	29 10 00 002			1		—
Crank, left	16 10 00 017	1	1			32
Crank, left	29 10 00 001			1		—
Screw wedge	535 083 635	2	2	2		33
Spring washer	A 7 DIN 137	4	4	4		34
Nut	M 7 DIN 934	2	2	2		35
Spring ring	B 12 DIN 127	2	2	2		36
Nut	11 55 00 731	2	2	2		37
Pedal w/reflector	535 083 170	2	2	2		38
Selector fork	16 14 00 505	1	1	1		39
Washer	045 414 027	1	1	1	{ include this part when ordering a selector fork up to engine - no 787 498 optional	—
Washer	034 097 150	1	1	1		—
Gear control shaft	16 14 00 002	1	1	1		40
Spring	16 14 00 007	1	1	1		41
Washer	16 14 00 006	1	1	1		42
Circlip	5 DIN 6799	2	2	2		43
Gear control lever	16 14 00 501	1	1	1		44
Pin	16 14 00 005	1	1		{ → 92 805 / 99 003	45
Circlip	11 17 10 993	2	2			46
Pin	16 14 01 005	1	1	1	92 806 / 99 004 →	—






Description	Order-No.	Quantity	Remarks	Illustr.-No.
-------------	-----------	----------	---------	--------------

QUICKLY

2 Gears		
N-S	L	T
1	1	1
1	1	1
1	1	1
2	2	2
1	1	1
1	1	1
1	1	1
1	1	1
1	1	1
1	1	1
2	2	2
1	1	1
1	1	1
1	1	1
1	1	1
1	1	1
2	2	2

Seal ring	041 401 140				1
Clutch body, inner	16 13 00 503				2
Circlip	11x1 DIN 471				3
Clutch plate	16 13 00 501				4
Clutch plate	16 13 00 006				5
Clutch pinion and outer body	16 13 00 502				6
Bearing	16 13 00 600		15x32x9 mm		7
Spring retainer, inner	16 13 00 007				8
Spring	16 13 00 014				9
Spring retainer, outer	16 13 00 008				10
Spring washer	A 8 DIN 137				11
Nut	M 8x1 DIN 934				12
Clutch cup	16 13 00 504				13
Seal ring	16 13 00 016				14
Circlip	16 13 00 012				15
Clutch lever	16 13 00 011				16
Spindle	16 13 00 013				17
Circlip	5 DIN 6799				18

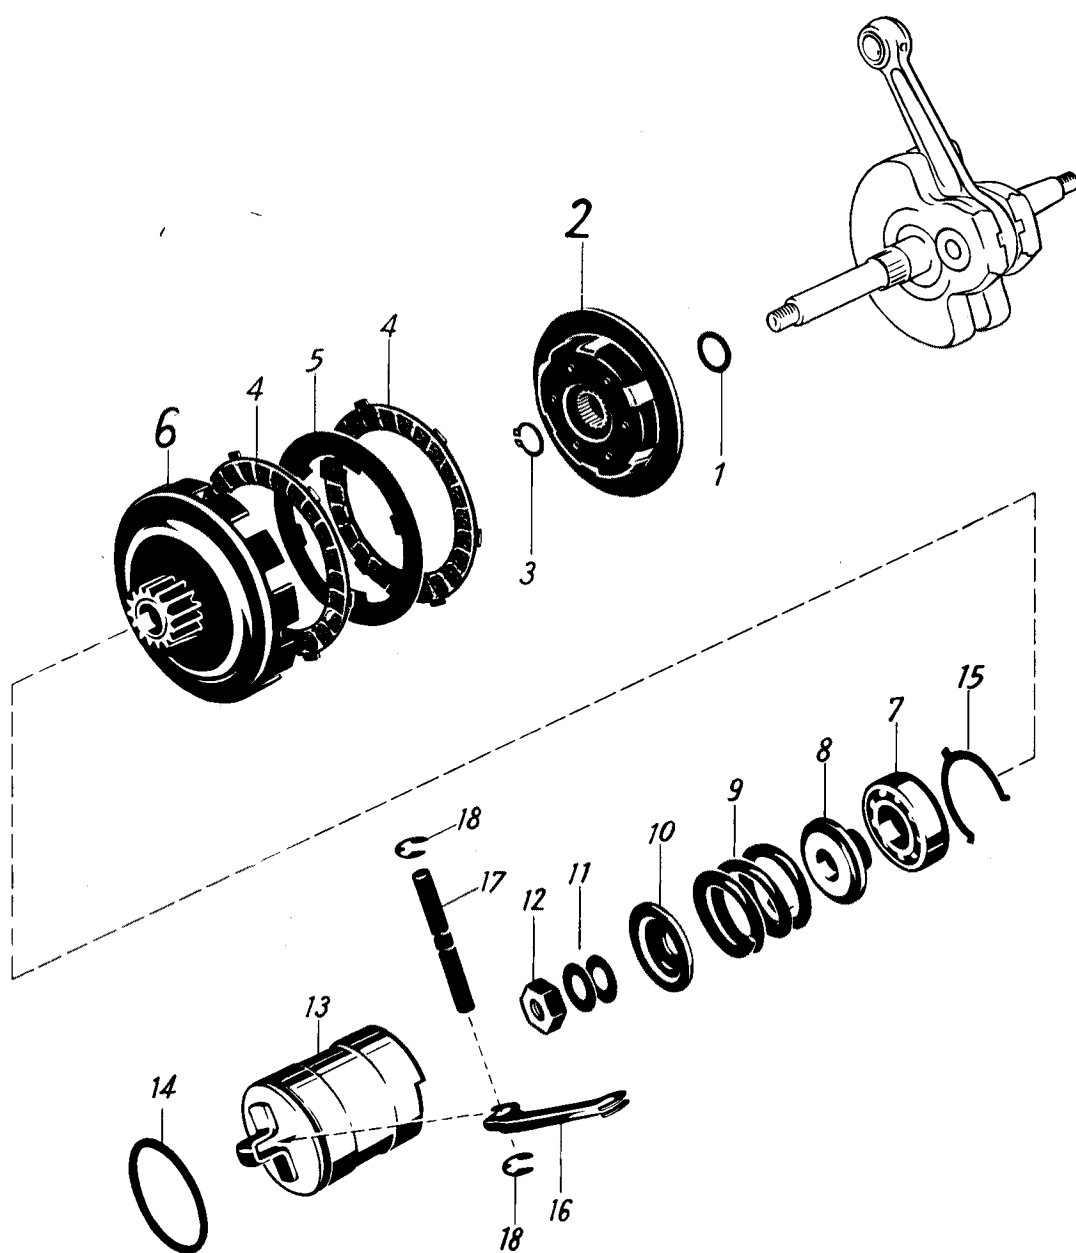

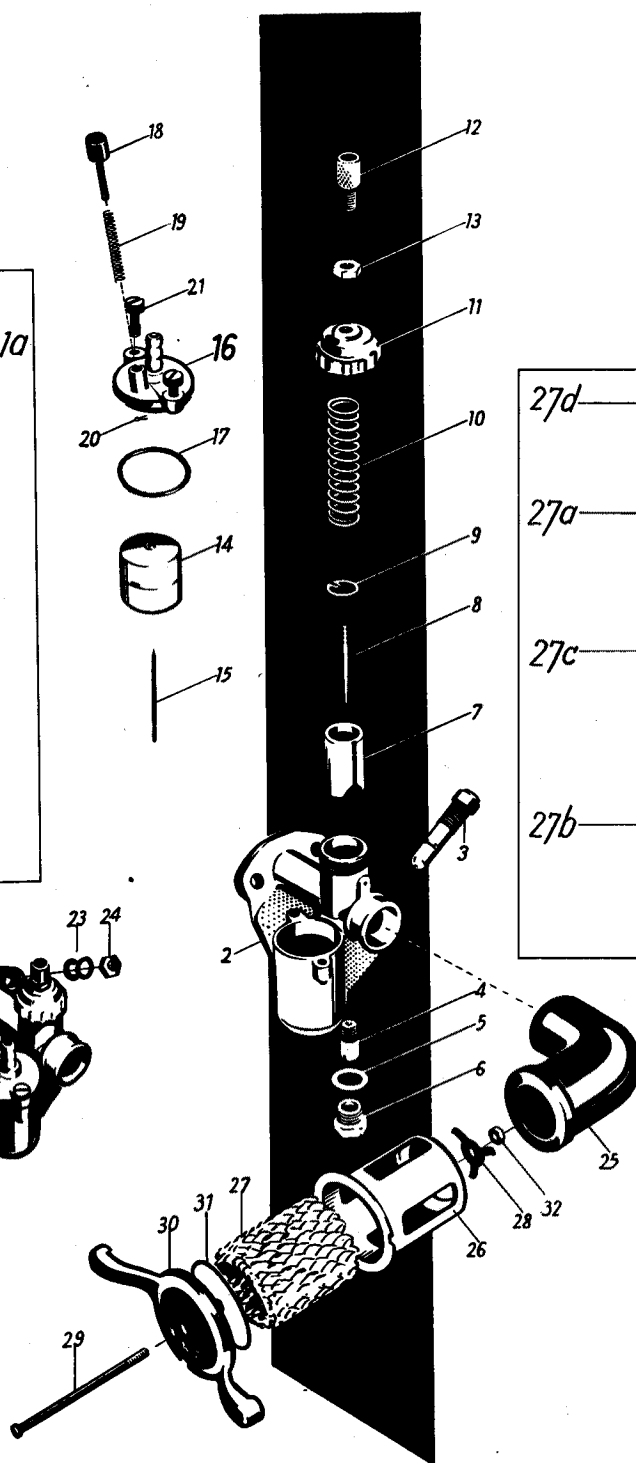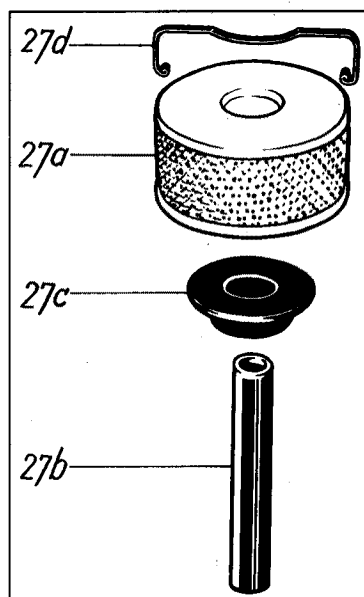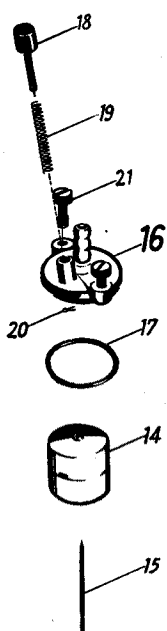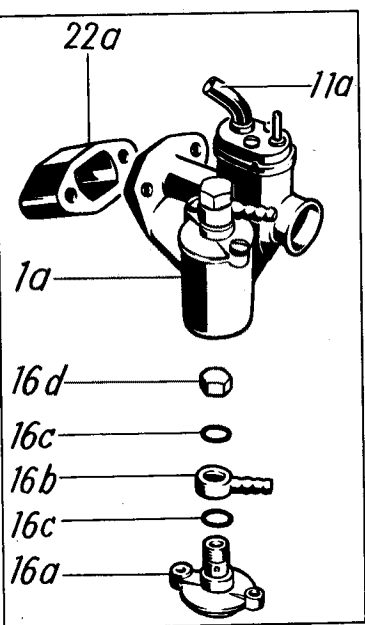

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
		2 Gears		
		N-S	L	T
1 2				
Carburettor 1/12/67	16 16 01 504	1	1	1
Carburettor 1/12/90	16 16 02 504	1	1	1a
Carburettor body	16 16 00 920	1	1	2
Carburettor body	16 16 01 920	1	1	—
Main jet	16 16 00 910	1	1	3
Needle jet	16 16 00 909	1	1	4
Needle jet	16 16 01 909	1	1	—
Seal ring	16 16 00 917	1	1	5
Screw plug	16 16 00 908	1	1	6
Throttle slide	16 16 00 905	1	1	7
Throttle slide	16 16 01 905	1	1	—
Jet needle	16 16 00 904	1	1	8
Jet needle	16 16 01 904	1	1	—
Circlip	16 16 00 915	1	1	9
Spring	16 16 00 913	1	1	10
Air slide	16 16 00 926	1	1	—
Gasket	16 16 00 927	1	1	—
Screw cap	16 16 00 916	1	1	11
Cap	16 16 01 916	1	1	—
Spring	16 16 00 925	1	1	—
Pin	16 16 01 924	1	1	—
Screw	16 16 00 901	1	1	12
Screw	16 16 01 901	1	1	—
Nut	16 16 00 918	1	1	13
Nut	16 16 01 918	1	1	—
Screw	16 16 00 923	2	2	—
Float	16 16 00 902	1	1	14
Needle	16 16 00 903	1	1	15
Float chamber cover	16 16 00 919	1	1	16
Seal ring	16 16 00 912	1	1	17
Tickler	16 16 00 911	1	1	18
Spring	16 16 00 906	1	1	19
Split pin	16 16 00 907	1	1	20
Screw	16 16 00 914	2	2	21

{ 1/12/67=60
1/12/90=64 }






indicate stamed
number


L = 23 mm

M 5

M 6

Description	Order-No.	Quantity			Remarks	Illustr.-No.
QUICKLY						
		2 Gears				
		N-S	L	T		
Gasket	16 16 00 008	1	1			22
Gasket	29 16 00 005			1		22a
Spring washer	B 5 DIN 137	4	4	4		23
Nut	M 5 DIN 934	2	2	2		24
Hose	16 16 00 006	1	1	1		25
Hose	16 16 01 006	1	1		s. page 27, Illustr.-No. 30	—
Cup	16 16 00 002	1	1			26
Air filter	16 16 00 009	1	1			27
Air filter	16 16 01 009	1	1		s. page 27, Illustr.-No. 31	—
Cap	16 16 00 017	1	1		s. page 27, Illustr.-No. 32	—
Air filter	29 16 00 501			1		27a
Rubber Hose	29 16 00 003			1		27b
Seal ring	29 16 00 002			1		27c
Clamp	29 16 00 004			1		27d
Spring	16 16 00 004	1	1			28
Pin	16 16 00 005	1	1			29
Cover	16 16 00 003	1	1		→ 482 754 / 522 989	—
Cover	16 16 01 003	1	1		} 482 755 / 522 990 →	30
Gasket	16 16 00 014	1	1			31
Nut	M 3 DIN 985	1	1			32
Pin	16 16 00 019	1	1		} 62 mm long for legshield	—
Knob	16 16 00 018	1	1			—
Lid for leg-guard	16 93 01 519	1	1			—

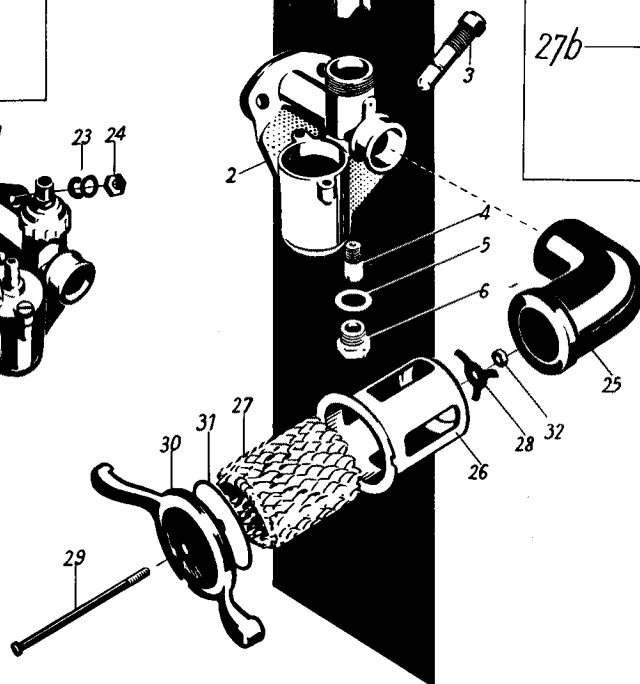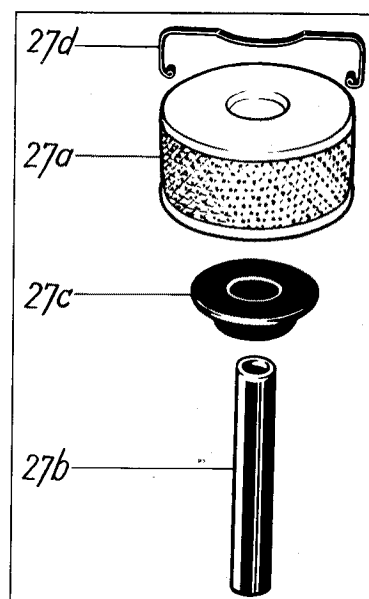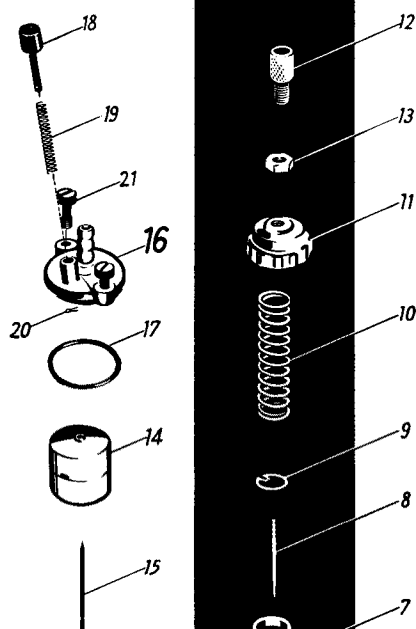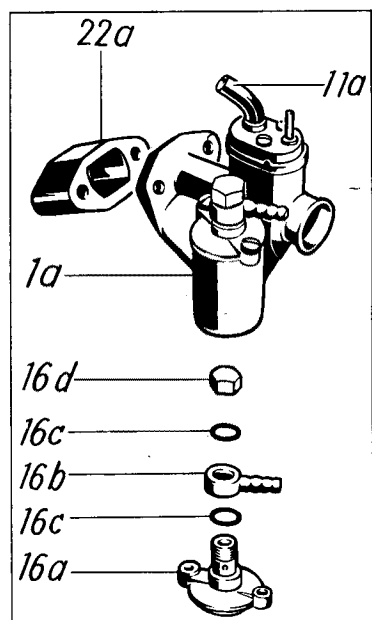

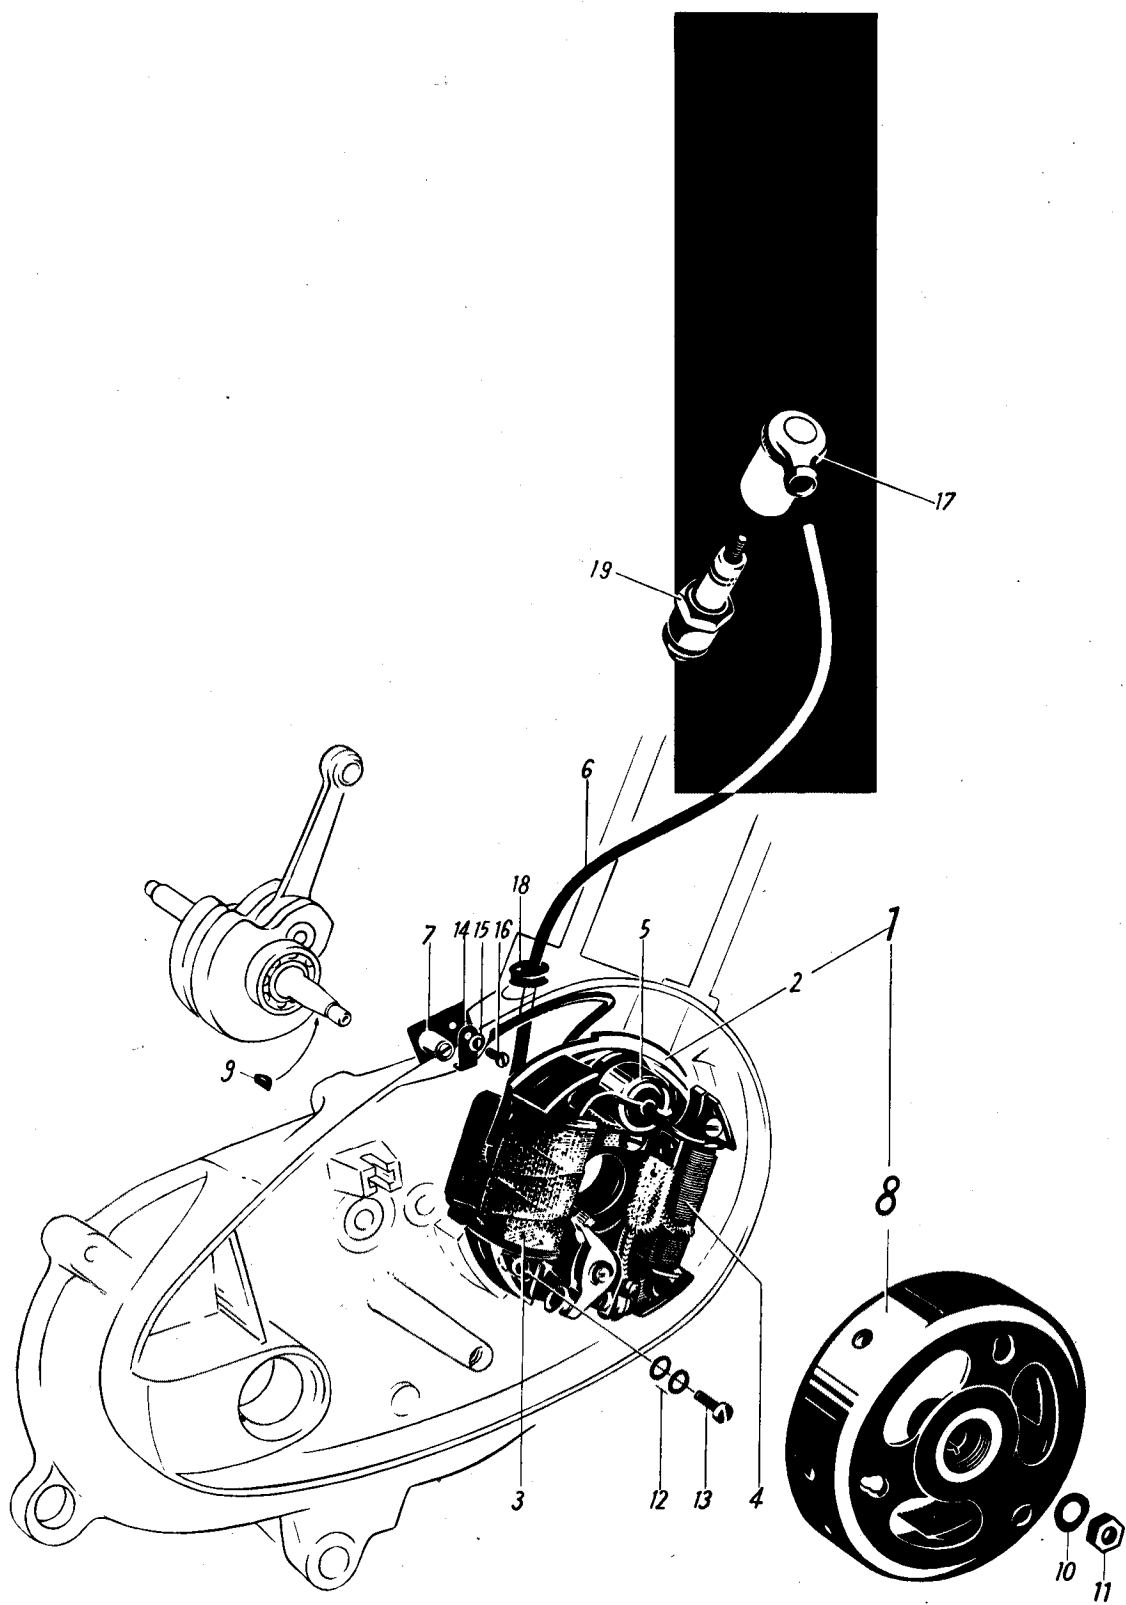



Description	Order-No.	Quantity	Remarks	Illustr.-No.		
QUICKLY						
		2 Gears				
		N-S	L	T		
				s. page 15		
Magneto-generator 3 Watt	16 17 00 501	1	1	{ Bosch LM/UPA 1/115/3 L 1, not supplied	1	
Base plate	16 17 00 933	1	1		2	
Ignition coil	16 17 00 919	1	1		3	
Lock washer	B 4 DIN 127	2	2		→ 321 393 / 338 766	—
Screw	M 4x20 DIN 84	2	2		—	
Lighting coil w/cable	16 17 00 921	1	1		4	
Lock washer	B 4 DIN 127	2	2		—	
Screw	M 4x18 DIN 84	2	2		—	
Magneto-generator 17 Watt	16 17 00 503	1	1	{ Bosch LMUP 1/115/17 L 2 is not delivered for 3 Watt lighting installation order also head lamp inset and electric bulb continuously dimmed and 2 Watt-Tail lamp (s-Page 54)	—	
Base plate	16 17 00 933	1	1		—	
Ignition coil	16 17 00 920	1	1		—	
Lock washer	B 4 DIN 127	2	2		321 394 / 338 767 → → 358 398 / 377 954	—
Screw	M 4x20 DIN 84	2	2		—	
Lighting coil w/cable	16 17 00 922	1	1		—	
Lock washer	B 4 DIN 127	2	2		—	
Screw	M 4x22 DIN 84	2	2		—	
Condenser	16 17 10 905	1	1	18 mm diam	5	
Lubricating felt	16 17 00 924	1	1	felt with spring	—	
Contact holder	16 17 00 925	1	1		—	
Spring ring	B 4 DIN 127	1	1		—	
Washer	4,3 DIN 433	1	1		—	
Screw	M 4x12 DIN 84	1	1		—	
Pivot for contact breaker	16 17 00 926	1	1		—	
Contact breaker	16 17 00 927	1	1		—	
Shim	011 098 150	as req.	as req.		—	
Washer	4,3 DIN 433	1	1	{ → 358 398 / 377 954	—	
Spring ring	011 098 151	1	1		—	
Screw	M 3x10 DIN 933	1	1		—	
Washer	3,7 DIN 125	1	1		—	
Insulating washer, large	041 410 090	2	2		—	
Insulating washer, small	041 410 091	2	2		—	
Spring ring	B 3 DIN 127	1	1		—	
Nut	M 3 DIN 934	1	1		—	
H. T Lead	16 17 00 900	1	1	L = 290 mm 5 diam	—	
H. T Lead	16 17 01 900	1	1	L = 290 mm 7 diam	6	
Terminalplate	16 17 00 928	1	1		7	
Terminal screw	16 17 00 929	1	1	4 mm	—	
Flywheel	16 17 00 930	1	1	Inner diam 90,5 mm → 321 393 / 338 766	8	
Flywheel	16 17 00 931	1	1	{ Inner diam 90,5 mm 321 394 / 338 767 → → 358 398 / 377 954	—	

Fixing parts s. page 14

Description	Order-No.	Quantity			Remarks	Illustr.-No.
QUICKLY						
		2 Gears				
		N-S	L	T		
					s. page 15	
Magneto-generator 17 Watt	16 17 01 503	1	1		Bosch LM/UPA 1/115/17 L 4 a. for 3 Watt lighting installation order also head lamp inset and electric bulb continuously dimmed and 2 Watt-tail lamp (s. page 54)	1
Baseplate	16 17 01 933	1	1			2
Ignition coil	16 17 01 920	1	1			3
Lighting coil	16 17 01 922	1	1			4
Spring ring	B 4 DIN 127	4	4			—
Screw	M 4x22 DIN 84	2	2			—
Screw	M 4x25 DIN 84	2	2			—
Condenser	16 17 10 905	1	1		18 mm diam	5
Lubricating felt	16 17 00 924	1	1		felt with spring } as felt with angle } required	—
Lubricating felt	041 410 523	1	1			—
Contact holder	16 17 00 925	1	1			—
Spring ring	B 4 DIN 127	1	1			—
Washer	4,3 DIN 433	1	1			—
Screw	M 4x12 DIN 84	1	1			—
Pivot for contact breaker-lever	16 17 00 926	1	1		358 399 / 377 955 →	—
Contact breaker lever	16 17 00 927	1	1			—
Shim	011 098 150	as req.	as req.			—
Washer	4,3 DIN 433	1	1			—
Spring ring	011 098 151	1	1			—
Bolt	M 3x10 DIN 933	1	1			—
Washer	3,7 DIN 125	1	1			—
Insulating washer, large	041 410 090	2	2			—
Insulating washer, small	041 410 091	1	1			—
Spring ring	B 3 DIN 127	1	1			—
Nut	M 3 DIN 934	1	1			—
H. T. Lead	16 17 01 900	1	1		L = 290 mm; 7 mm diam	6
Insulating clamp	16 17 00 936	1	1			—
Terminal plate	16 17 00 928	1	1			7
Terminal screw	16 17 00 929	1	1		4 mm	—
Flywheel	16 17 01 931	1	1		Inner diam 85,5 mm	8

Fixing parts s. page 14

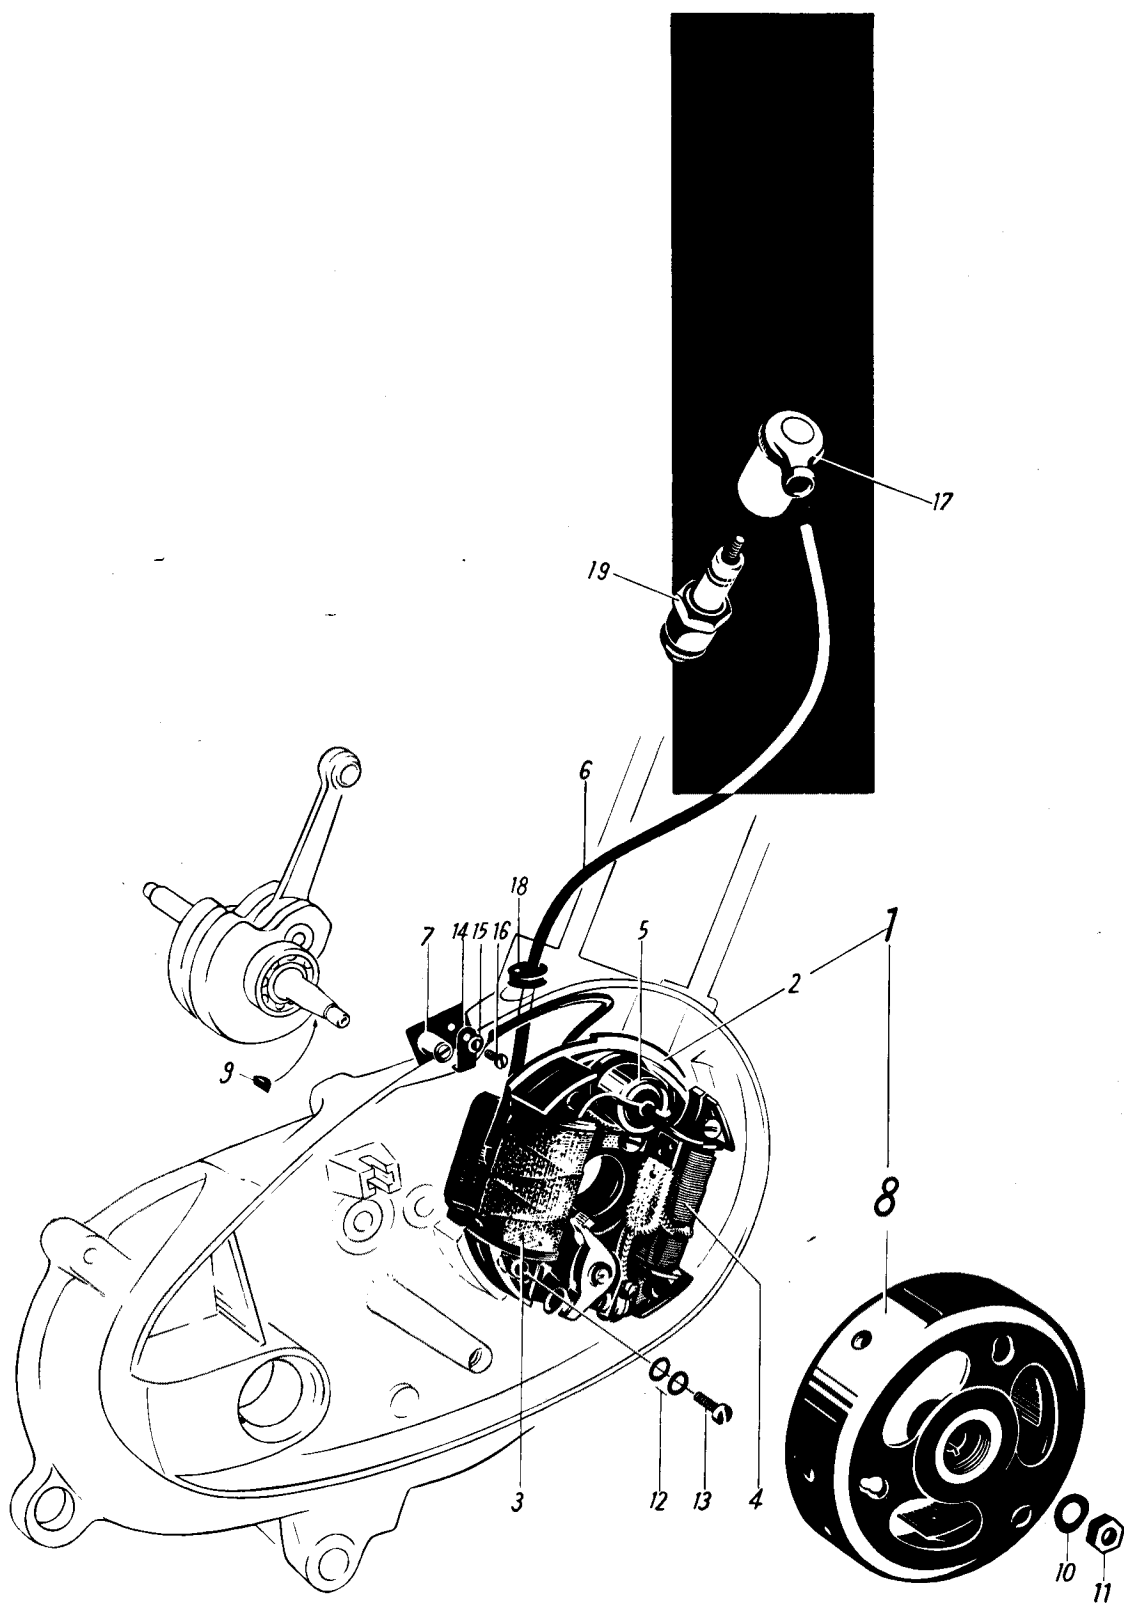

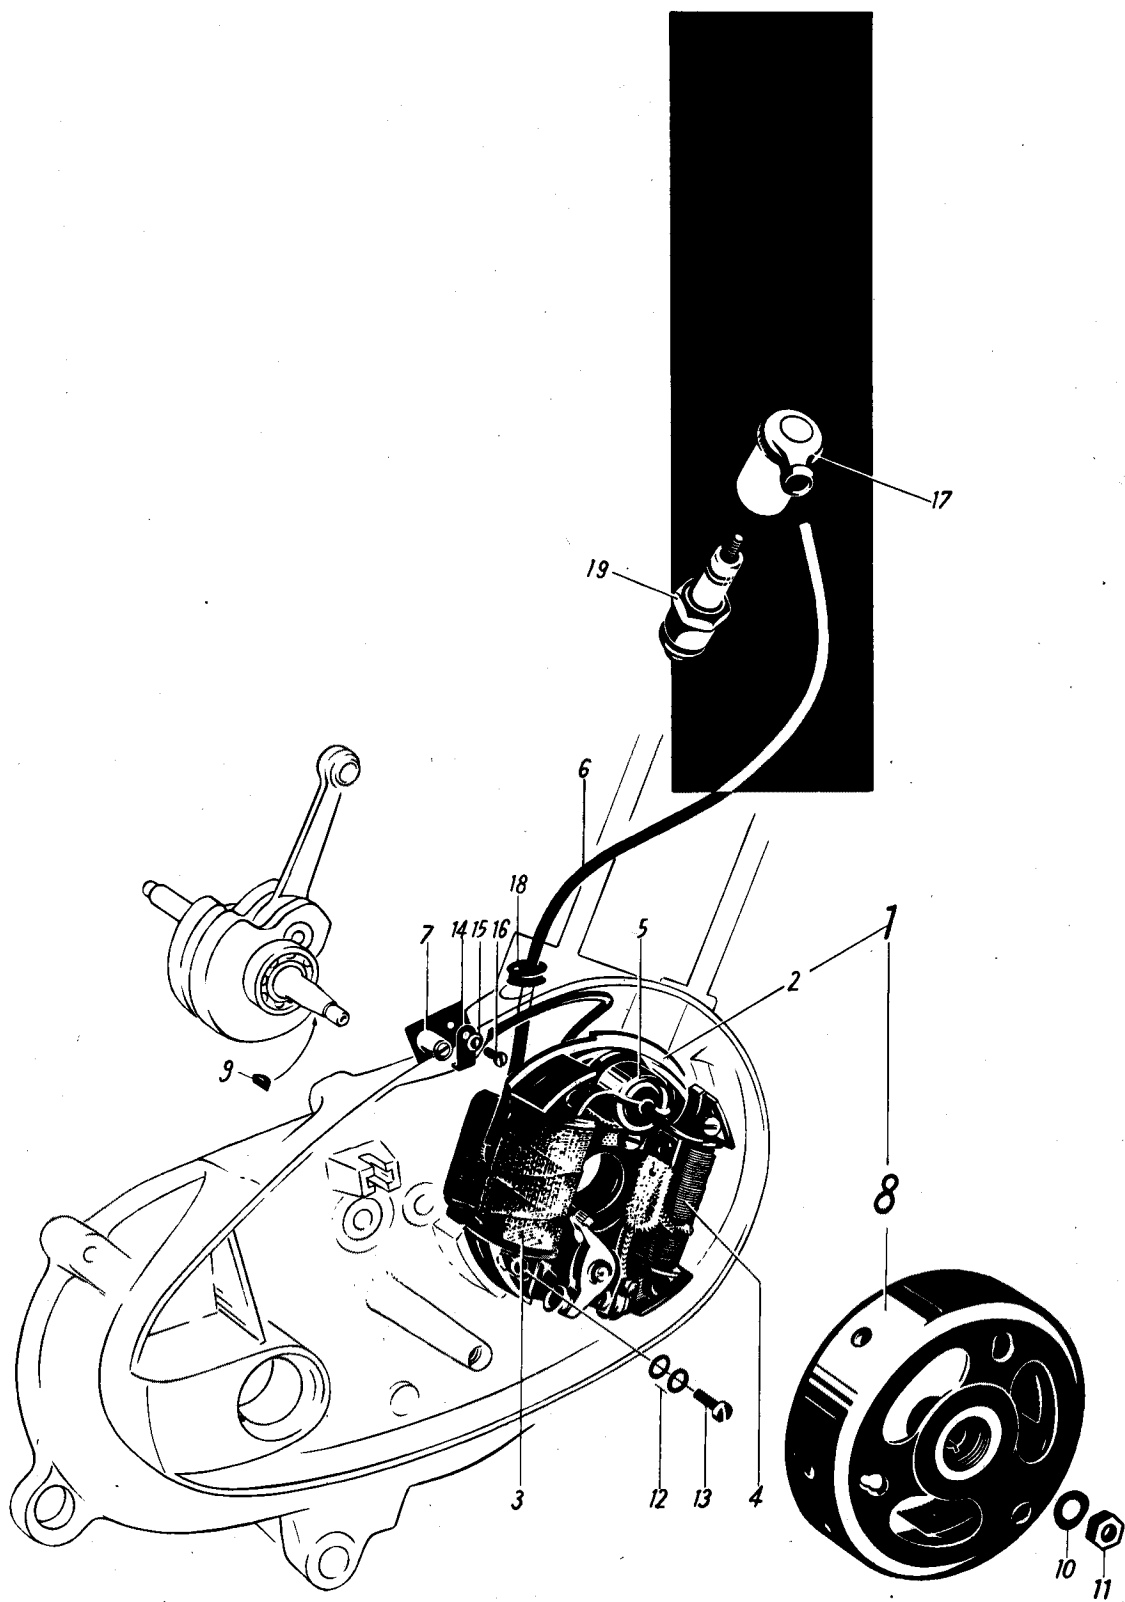



Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
2 Gears				
		N-S	L	T
				s. page 15
Magneto-generator 3 Watt	16 17 00 502	1	1	{ NORIS ELZ 6/3/2 L Condenser 17 mm diam is not supplied
Base plate	16 17 10 932	1	1	{ → 155 053 / 165 433
Ignition winding	16 17 10 903	1	1	{
Magneto-generator 3 Watt	16 17 01 502	1	1	{ NORIS ELZJ 3/9 L Condenser 18 mm diam is not supplied
Base plate	16 17 11 932	1	1	{ 155 054 / 165 434 → → 321 393 / 338 766
Magneto-generator 17 Watt	16 17 01 504	1	1	{ NORIS ELZJ 17/4 L 321 394 / 338 767 → → 542 388 / 588 147 not supplied
Magneto-generator 17 Watt	16 17 02 504	1	1	{ NORIS ELZJE 17/2 L 1 542 389 / 588 148 →
Base plate	16 17 11 932	1	1	2
Ignition winding	16 17 11 903	1	1	155 054 / 165 434 → 3
Lock washer	A 4,3 DIN 6798	2	2	—
Screw	AM 4x19 DIN 84	2	2	—
Lighting coil	16 17 10 916	1	1	→ 321 393 / 338 766
Lighting coil	16 17 10 904	1	1	{ 321 394 / 338 767 → → 542 388 / 588 147 4
Lighting coil	16 17 12 904	1	1	542 389 / 588 148 →
Lock washer	A 4,3 DIN 6798	2	2	—
Screw	AM 4x16 DIN 84	2	2	→ 321 393 / 338 766
Screw	AM 4x25 DIN 84	2	2	—
Screw	AM 4x21 DIN 84	2	2	{ pay attention to length 321 394 / 338 767 →
Condenser	11 17 10 916	1	1	{ 17 mm diam → 155 053 / 165 433
Condenser	16 17 10 905	1	1	{ 18 mm diam 155 054 / 165 434 → 5
Insulating plate	16 17 10 906	1	1	—
Lubricating felt	16 17 00 924	1	1	felt with spring } as
Lubricating felt	041 410 523	1	1	felt with angle } required
Spring ring	B 4 DIN 127	1	1	—
Screw	AM 4x8 DIN 84	1	1	—
Contact holder	16 17 10 908	1	1	—
Eccentric pin	16 17 10 907	1	1	—
Spring ring	B 4 DIN 127	1	1	—
Washer	11 17 10 994	1	1	—
Screw	AM 4x10 DIN 84	1	1	—
Pivot for contact breaker lever	16 17 10 909	1	1	—

Group 17
Electrical equipment (engine)

NSU-Quickly (2 gears Engine)

Description	Order-No.	Quantity	Remarks	Illustr.-No.		
QUICKLY						
		2 Gears				
		N-S	L	T		
Contact breaker lever	16 17 00 927	1	1	s. page 15	—	
Circlip	11 17 10 993	1	1		—	
Bolt	M 3x9 DIN 933	1	1		—	
Washer	11 17 10 912	1	1		—	
Insulating washer, large	11 17 10 996	2	2		12 mm diam	—
Insulating washer, small	11 17 10 923	1	1		6 mm diam	—
Washer	11 17 10 997	1	1		—	
Spring ring	B 3 DIN 127	1	1		—	
Nut	M 3 DIN 934	1	1		—	
Contact-breaker-to- condenser lead	16 17 10 910	1	1		—	
H. T. Lead	16 17 00 900	1	1	L = 290 mm, 5 diam → 155 053 / 165 433	—	
H. T. Lead	16 17 01 900	1	1	L = 290 mm, 7 diam 155 054 / 165 434 →	6	
Terminal plate	16 17 10 911	1	1		7	
H. T. Lead	16 17 10 901	1	1	L = 175 mm	—	
Terminal screw	16 17 10 912	1	1		—	
Flywheel	16 17 10 915	1	1	→ 155 053 / 165 433	—	
Flywheel	16 17 11 915	1	1	{ 155 054 / 165 434 → → 321 393 / 338 766	—	
Flywheel	16 17 10 913	1	1	{ 321 394 / 338 767 → → 542 388 / 588 147	8	
Flywheel	16 17 12 913	1	1	542 389 / 588 148 →	—	
Fixing parts for generators						
Woodruff key	2x3,7 DIN 6888	1	1	} for Flywheel	9	
Spring washer	A 8 DIN 137	1	1		10	
Nut	M 8x1 DIN 934	1	1		11	
Spring washer	B 4 DIN 137	4	4	} for Base plate	12	
Screw	AM 4x15 DIN 84	2	2		13	
Clip	16 17 00 004	1	1	} for Terminal plate	14	
Spring washer	A 4 DIN 137	1	1		15	
Screw	AM 4x10 DIN 84	1	1		16	
Terminal cap	011 109 070	1	1	→ 753 142 / 822 514	17	
Terminal cap	16 17 00 507	1	1	{ 753 143 / 822 515 → also for vehicles prior to the above number if desired s. page 16, Illustr.-No. 23	—	
Rubber sleeve (5 mm D)	16 17 00 002	1	1	hole 5 mm diam → 155 053 / 165 433	—	
Rubber sleeve (7 mm D)	35 17 00 002	1	1	hole 7 mm diam 155 054 / 165 434 →	18	
Spark plug	11 17 00 068	1	1	W 190 M 11 S	19	

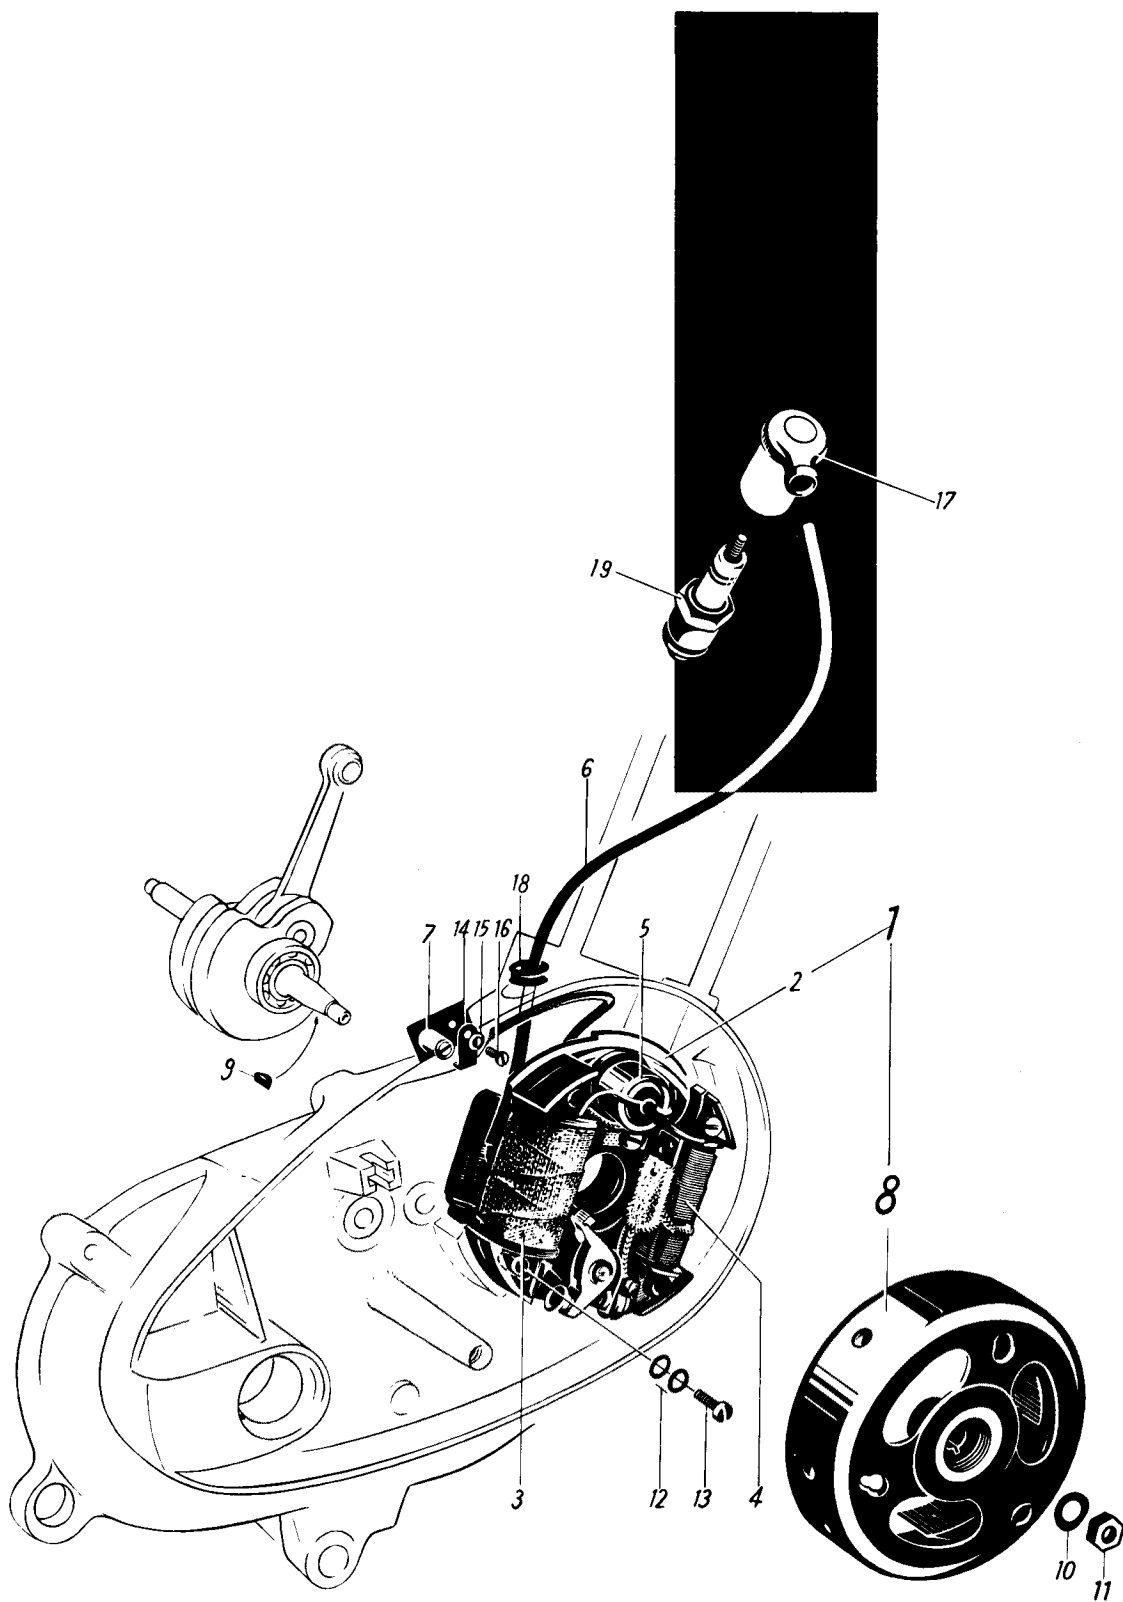

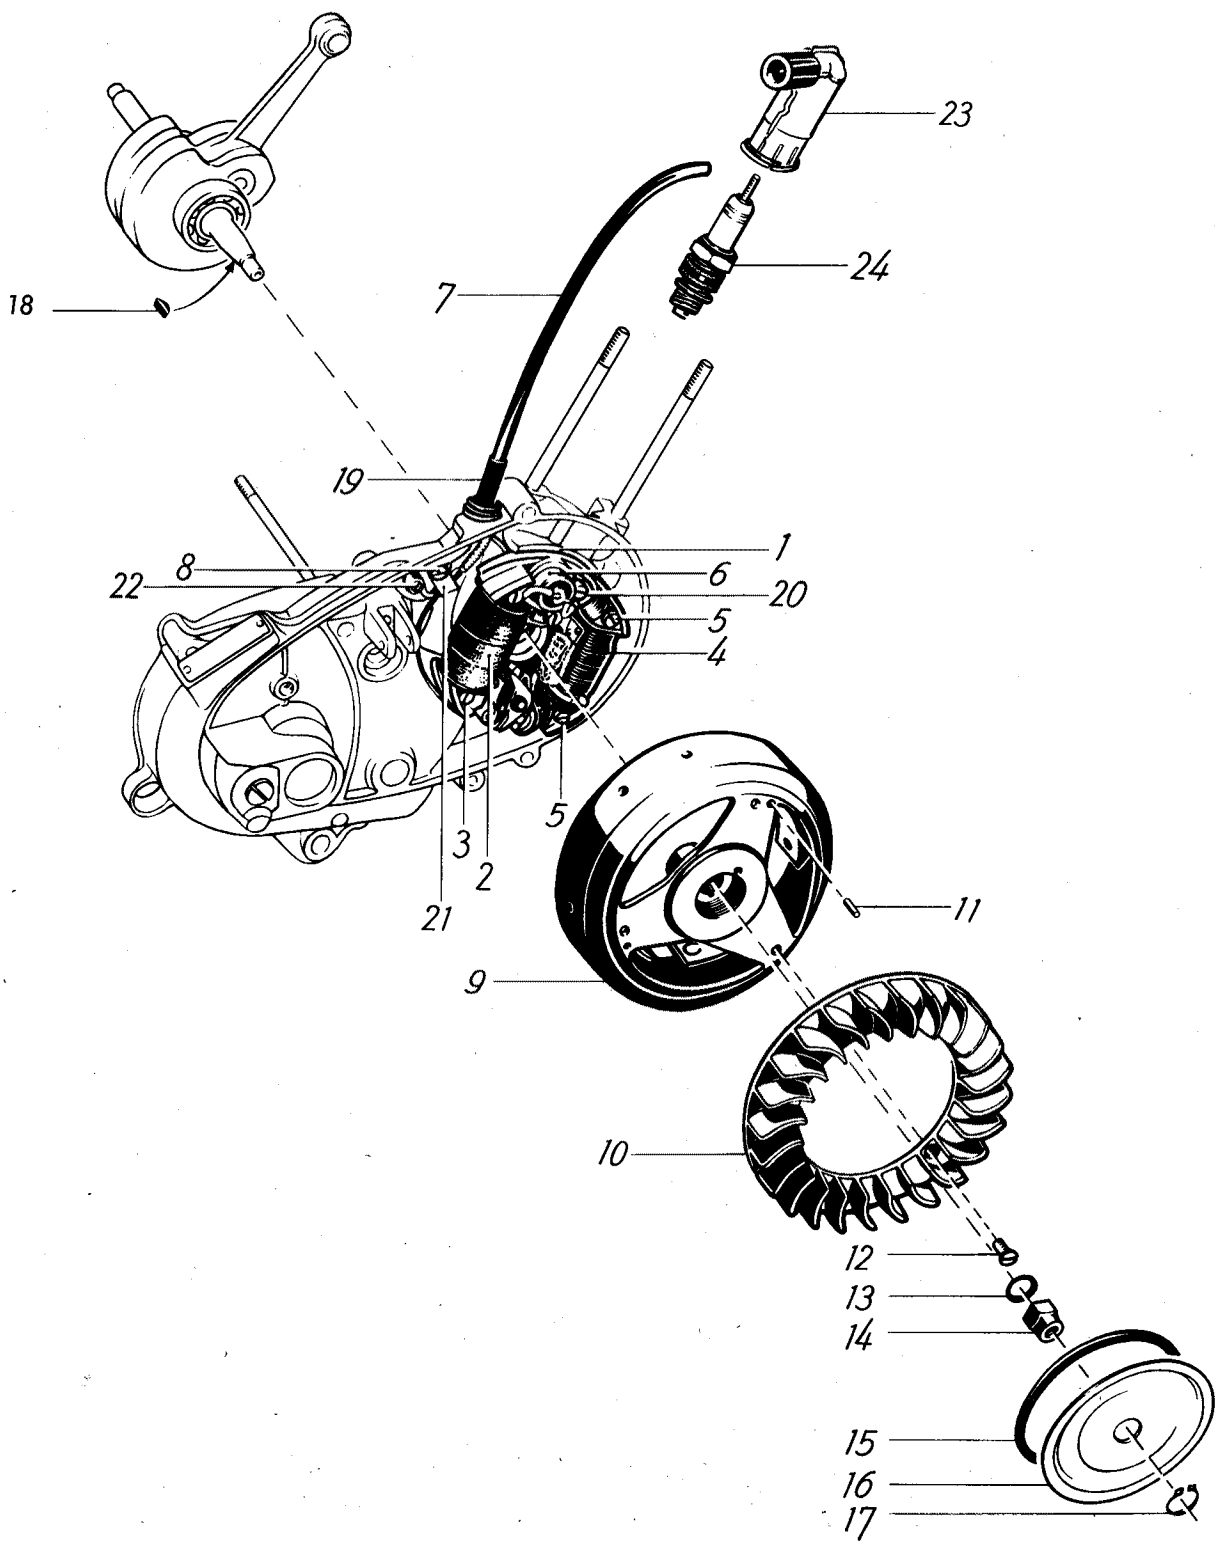



Description	Order-No.	Quantity			Remarks	Illustr.-No.
QUICKLY						
		2 Gears				
		N-S	L	T		
Magneto-generator	35 17 00 504			1	Bosch LM/UPA 1/115/17 L 8ml L (8/1) ml	—
Base plate w/Ignition coil lighting coil	35 17 00 900			1		1
Base plate	35 17 00 910			1		—
Ignition coil	35 17 00 901			1		2
Spring ring	B 4 DIN 127			2		—
Screw	M 4x20 DIN 84			2		3
Insulating plate	35 17 00 909			1		—
Lighting coil	35 17 00 902			1		4
Spring ring	B 4 DIN 127			2		—
Screw	M 4x22 DIN 84			2		5
Condenser	16 17 10 905			1		6
Contact holder	35 17 00 904			1		—
Washer	4,3 DIN 433			1	} Fixing parts for generators	—
Spring ring	B 4 DIN 127			1		—
Screw	M 4x10 DIN 84			1		—
Eccentric pin	35 17 00 911			1		—
Contact breaker	16 17 00 927			1		—
Insulating washer	011 098 150			1-2		—
Circlip	4 DIN 6799			1		—
Pivot for contact breaker	35 17 00 912			1		—
Bolt for contact breaker	M 3x9 DIN 933			1		—
Washer	3,7 DIN 125			1		—
Insulating washer, large	041 410 090			2		—
Insulating washer, small	041 410 091			1		—
Washer	35 17 00 913			1		—
Spring ring	B 3 DIN 127			1		—
Nut	M 3 DIN 934			1		—
Lubricating felt	041 410 523			1	felt with angle	—
Spring ring	B 4 DIN 127			1		—
Screw	M 4x8 DIN 84			1		—

Group 17
Electrical equipment (engine)

NSU-Quickly (2 gears Engine)

Description	Order-No.	Quantity	Remarks	Illustr.-No.		
QUICKLY						
2 Gears						
		N-S	L	T		
Condenser to lead	35 17 00 914			1	—	
H. T. lead	35 17 00 907			1	7	
Terminal plate	35 17 00 915			1	8	
Flywheel	35 17 00 908			1	9	
Fan	29 19 00 004			1	10	
Pin	4 h 8x6 DIN 7			2	11	
Bolt	AM 4x8 DIN 63			3	12	
Spring washer	A 8 DIN 137			1	13	
Nut	29 17 00 002			1	14	
Gasket	35 09 00 015			1	15	
Washer	29 17 00 001			1	16	
Circlip	12x1 DIN 471			1	17	
Spring washer for Flywheel	2x3,7 DIN 6888			1	18	
Rubber sleeve	35 17 00 002			1	19	
Spring washer	B 4 DIN 137			4	} Fixing parts for generators	—
Screw	AM 4x15 DIN 84			2		20
Clip	16 17 00 004			1	} for Clip	21
Spring washer	A 4 DIN 137			1		—
Screw	AM 4x10 DIN 84			1		22
Terminal cap	16 17 00 507			1		23
Spark plug	11 17 00 068			1	W 190 M 11 S	24

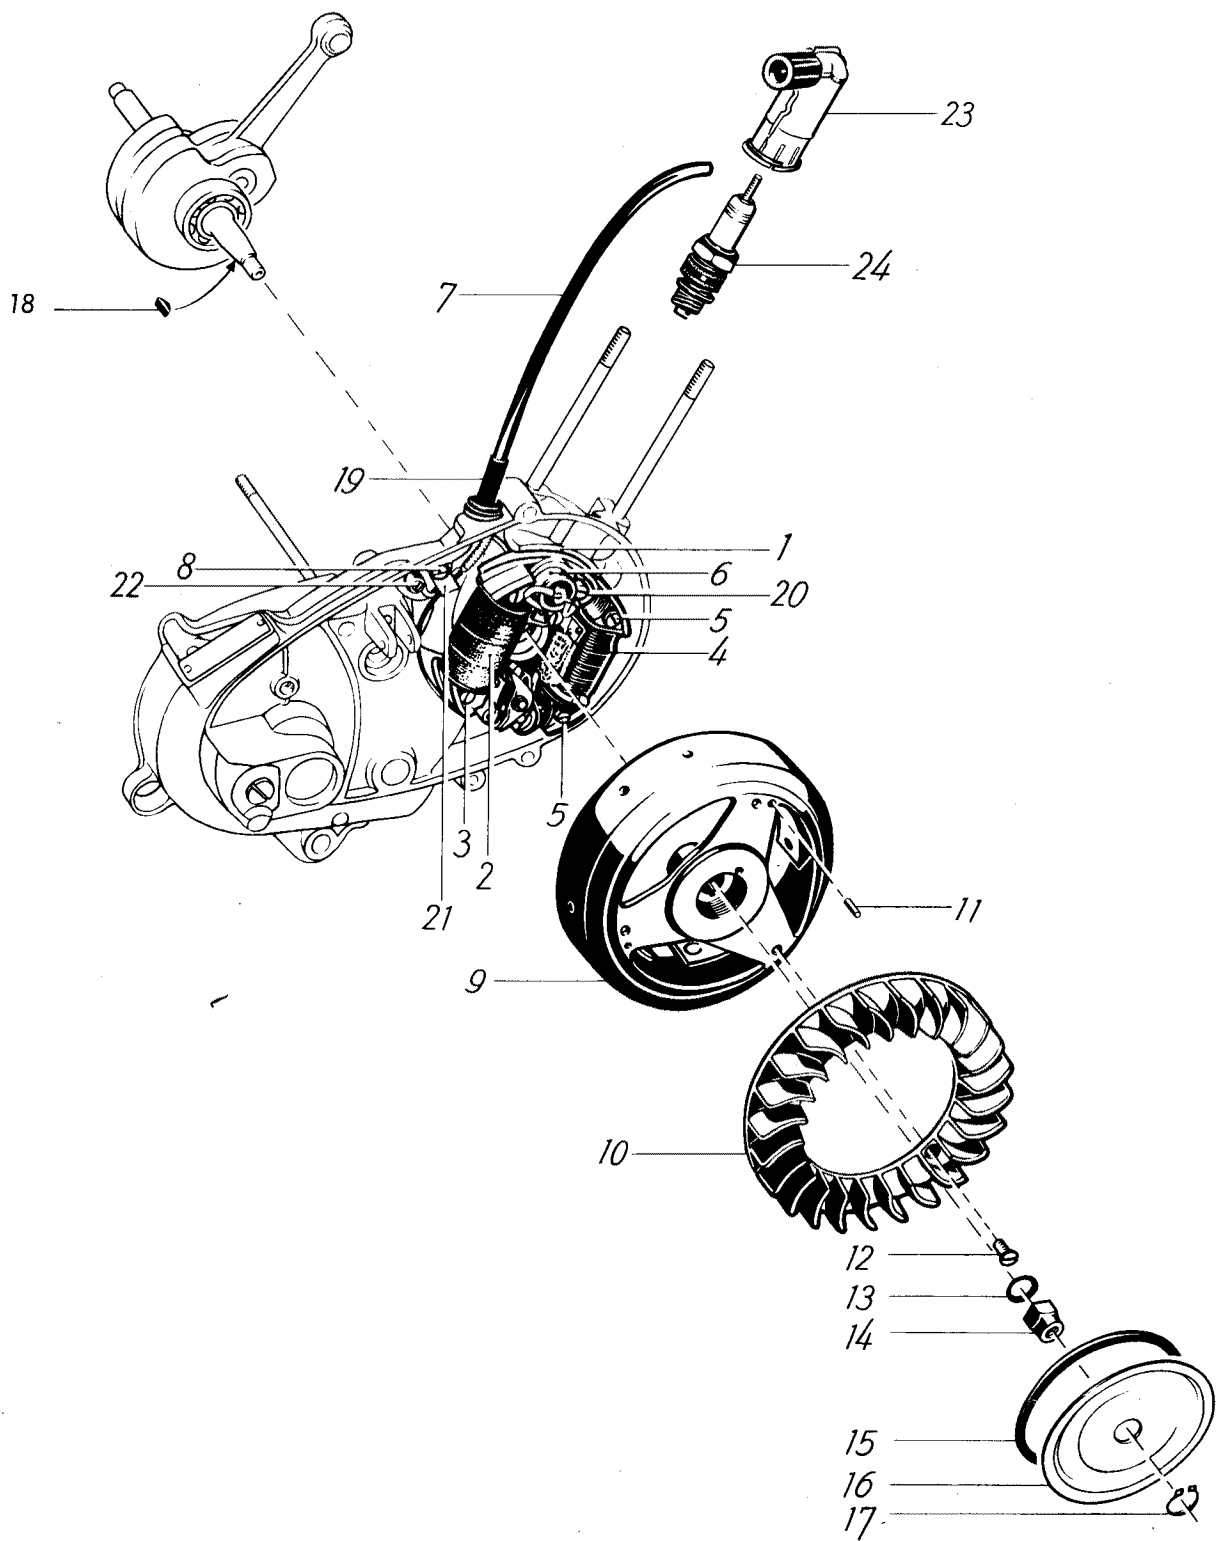

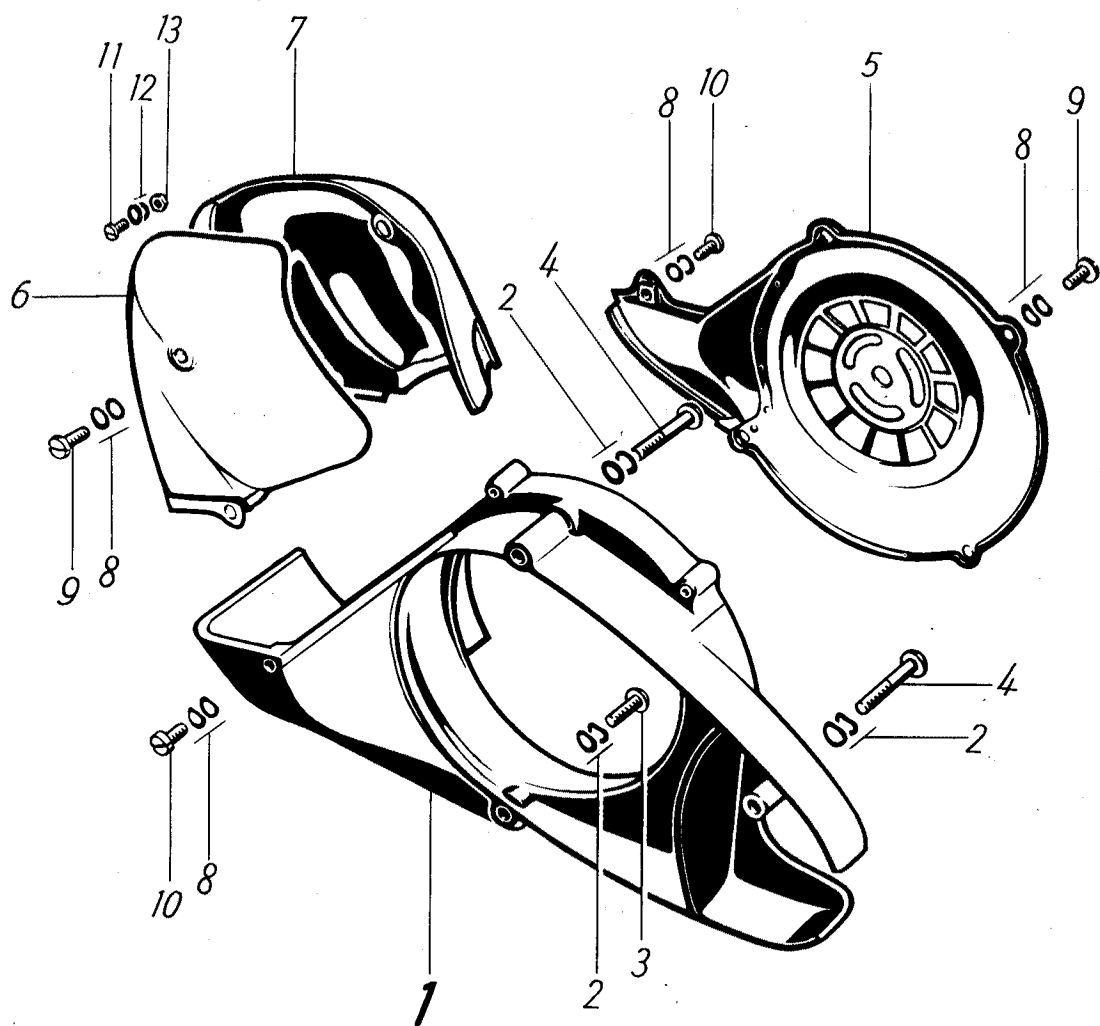

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
2 Gears				
		N-S	L	T
Spirally wound casing	29 19 00 008			1
Spring washer	A 6 DIN 137			6
Screw	AM 6x18 DIN 85			1
Screw	BM 6x38 DIN 85			2
Fan cowling	29 19 00 502			1
Air ducting, left	29 19 00 001			1
Air ducting, right	29 19 00 002			1
Spring washer	A 5 DIN 137			16
Screw	AM 5x15 DIN 85			6
Screw	AM 5x10 DIN 85			2
Screw	AM 4x6 DIN 85			2
Spring washer	A 4 DIN 137			4
Nut	M 4 DIN 934			2

Description

Order-No.

Quantity



Remarks


Illustr.-No.

QUICKLY

		3 Gears					
		N-S	L	Cav.	T	TT	
Engine with generator and carburettor D 12 mm	16 00 02 903	1	1				1
Engine with generator and carburettor D 12 mm	16 00 90 907			1			—
Engine with generator and carburettor D 12 mm	29 00 00 902				1		—
Engine with generator and carburettor D 12 mm	39 00 00 901					1	1a
		NS					
Bolt	16 01 00 038	2 1	1			1	2
Bolt	16 01 00 039	1	1	2	2	1	3
		S					
Bolt for side support	16 93 00 058	1	1				—
Bolt	16 01 00 047			1	1	1	3a
Lock washer	J 8,4 DIN 6797	3	3	4	3	3	4
Nut	083 871 012	2	2	2	2	2	5
Nut	034 099 167			1			—


engine mounting parts for vehicles from frame/engine number 501 834 / 545 056 up. In case of earlier vehicles exchange the assembly of all the parts listed and rebore engine mounting holes in frame, on crankcase and carrying handle to 8,3 mm diam.; remove the threaded projection at the frame, and order 1 Nut 083 871 012 additionally

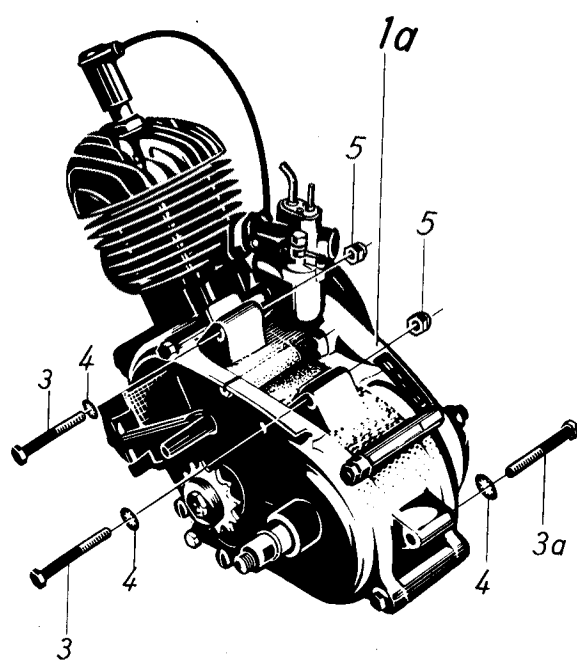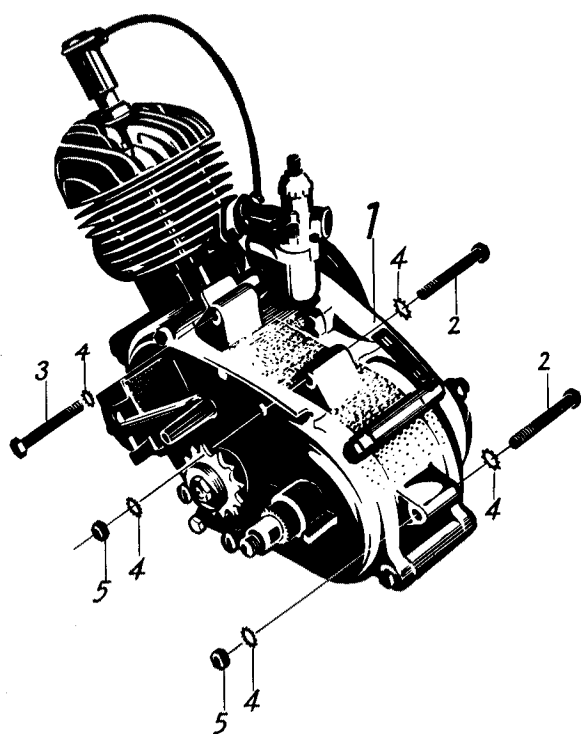


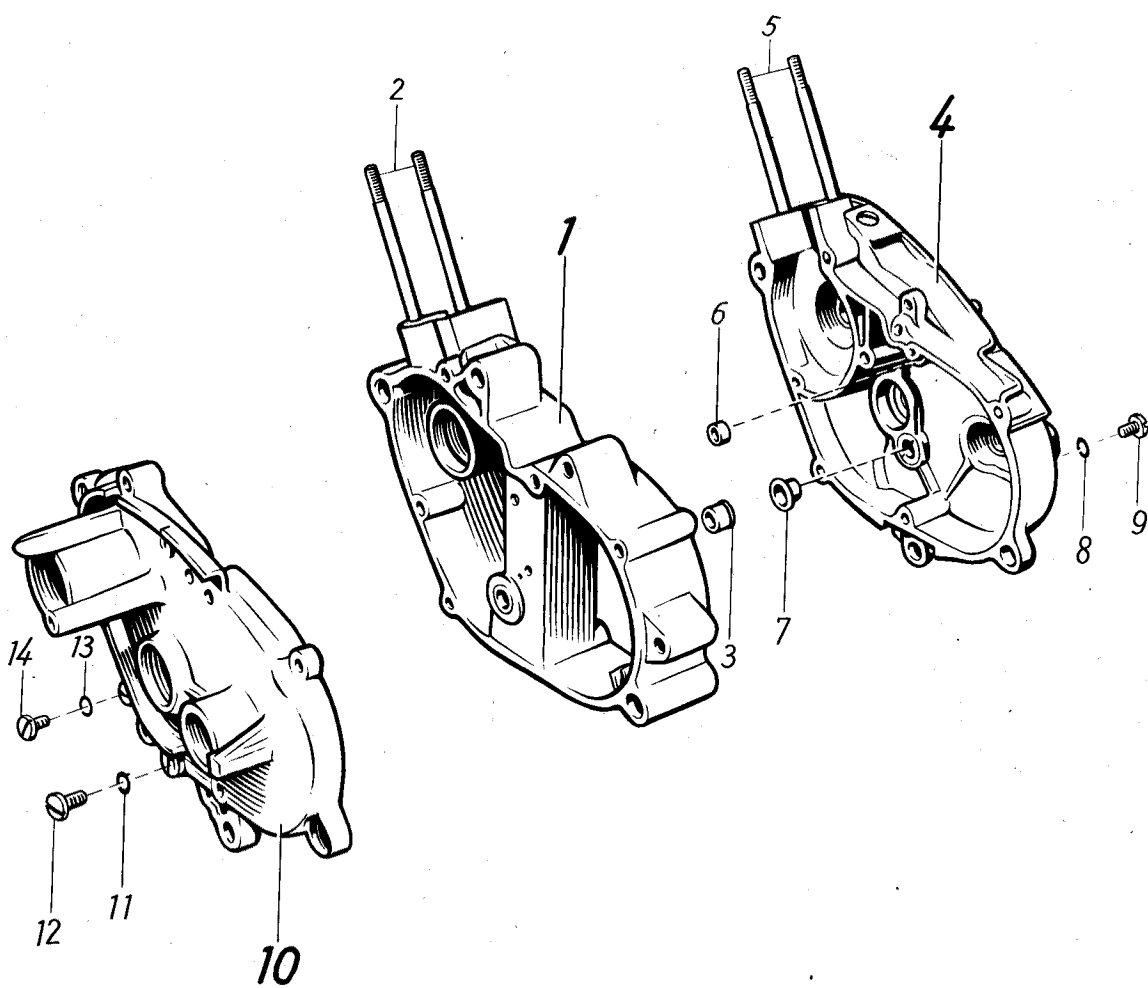

Description	Order-No.	Quantity					Remarks	Illustr.-No.
QUICKLY								
		3 Gears						
	1 2 3 4	N-S	L	Cav.	T	TT		
Crankcase	16 01 01 504	1	1	1				—
Crankcase	29 01 00 502				1	1		—
Crankcase half, left	16 01 02 502	1	1	1	1	1		1
Stud	AM 7x85 DIN 835	2	2	2	2	2		2
Bush	16 01 00 040	1	1	1	1	1		3
Crankcase half, right	16 01 01 901	1	1	1				4
Crankcase half, right	29 01 00 901				1	1		—
Stud	AM 7x85 DIN 835	2	2	2	2	2		5
Bush	16 01 01 026	1	1	1	1	1		6
Bush	16 01 00 046	1	1	1	1	1	7 43 607 → Engine-No.	7
Bush	16 01 00 402	1	1	1			→ Engine-No. 743 606	—
Seal ring	A 8x12 DIN 7603	1	1	1	1	1		8
Screw plug	16 01 00 025	1	1	1	1	1		9
Cover, left	16 01 01 500	1	1	1				10.
Cover, left	29 01 00 903				1	1		—
Seal ring	16 01 00 028				1	1	21x28x5,5 mm	—
Seal ring	A 8x12 DIN 7603	1	1	1	1	1		11
Screw plug	16 01 00 025	1	1	1	1	1		12
Seal ring	A 6x12 DIN 7603	1	1	1	1	1		13
Screw	RiM 6x8 DIN 85	1	1	1	1	1		14

Description	Order-No.	QUICKLY					Remarks	Illustr.-No.
		3 Gears						
		N-S	L	Cav.	T	TT		
Additional parts for left crankcase								
Circlip	35x1,5 DIN 472	1	1	1	1	1		1
Bearing	011 055 770	1	1	1	1	1	15x35x11 mm	2
Seal ring	16 01 00 034	1	1	1	1	1	20x35x7 mm	3
Gasket	16 01 01 015	1	1	1	1	1		—
Bolt	M 6x50 DIN 931	1	1	1	1	1		—
Lock washer	A 6,4 DIN 6798	1	1	1	1	1		6
Spring washer	B 6 DIN 137	2	2	2	2	2		7
Nut	M 6 DIN 934	1	1	1	1	1		8
Additional parts for right Crankcase half								
Bearing	011 055 770	1	1	1	1	1	15x35x11 mm	9
Seal ring	16 01 00 033	1	1	1	1	1	15x24x7 mm	10
Bearing	16 01 00 601	1	1	1	1	1	10x30x9 mm, s. page 23	—
Seal ring	16 01 00 028	1	1	1			21x28x5,5	12
Seal ring	16 01 01 027	1	1	1	1	1	9x18x5 mm	—
Seal ring	16 01 00 050	1	1	1	1	1		—
Additional parts for left-hand cover								
Circlip	32x1,2 DIN 472	1	1	1	1	1		14
Bearing	021 105 512	1	1	1	1	1	12x32x10 mm	15
Seal ring	16 01 00 032	1	1	1	1	1	12x32x7 mm	16
Gasket	16 01 01 014	1	1	1	1	1		—
Crankcase assembling parts								
Sleeve	16 01 00 008	2	2	2	2	2		18
Sleeve Length of thread = 6,5 mm	16 01 00 017	2	2	2			→ 791 729 / 880 138	19
Sleeve Length of thread = 22,5 mm	16 01 00 017	2	2	2	2	2	791 730 / 880 139 →	—
Bolt	M 6x65 DIN 931	2	2	2			→ 791 729 / 880 138	20
Bolt	M 6x55 DIN 931	2	2	2	2	2	791 730 / 880 139 →	—
Bolt	M 6x80 DIN 931	5	5	5	5	5		21
Bolt	M 6x72 DIN 931	1	1	1	1	1		22
Spring washer	B 6 DIN 137	16	16	16	16	16		23
Gasket set	16 01 01 900	1	1	1				—
Gasket set	29 01 00 904				1	1		—
Chain cover	16 01 00 501	1						24
Chain cover	16 01 01 501		1					25
Chain cover	16 01 90 509			1				—
Chain cover	29 01 00 001				1	1		25a
Screw	AM 6x15 DIN 91	1	1	1	2	2		26
Spring washer	B 6 DIN 137			2				—
Bolt	M 6x12 DIN 933			1				—
Coverplate	16 01 00 505	1	1					27
Spring washer	B 6 DIN 137	2	2					28
Pointed screw	M 6x55 DIN 85	1	1					29
Cover, right	16 01 00 009	1	1	1				30
Screw	M 6x18 DIN 88	1	1	1				31
Cover, right	39 01 00 002					1		—
Screw	M 6x18 DIN 88					1	→ 3 905 569 / 3 905 440	—
Spacer	39 01 00 003					1	} 3 905 570 / 3 905 441 →	—
Screw	M 6x30 DIN 88					1		—

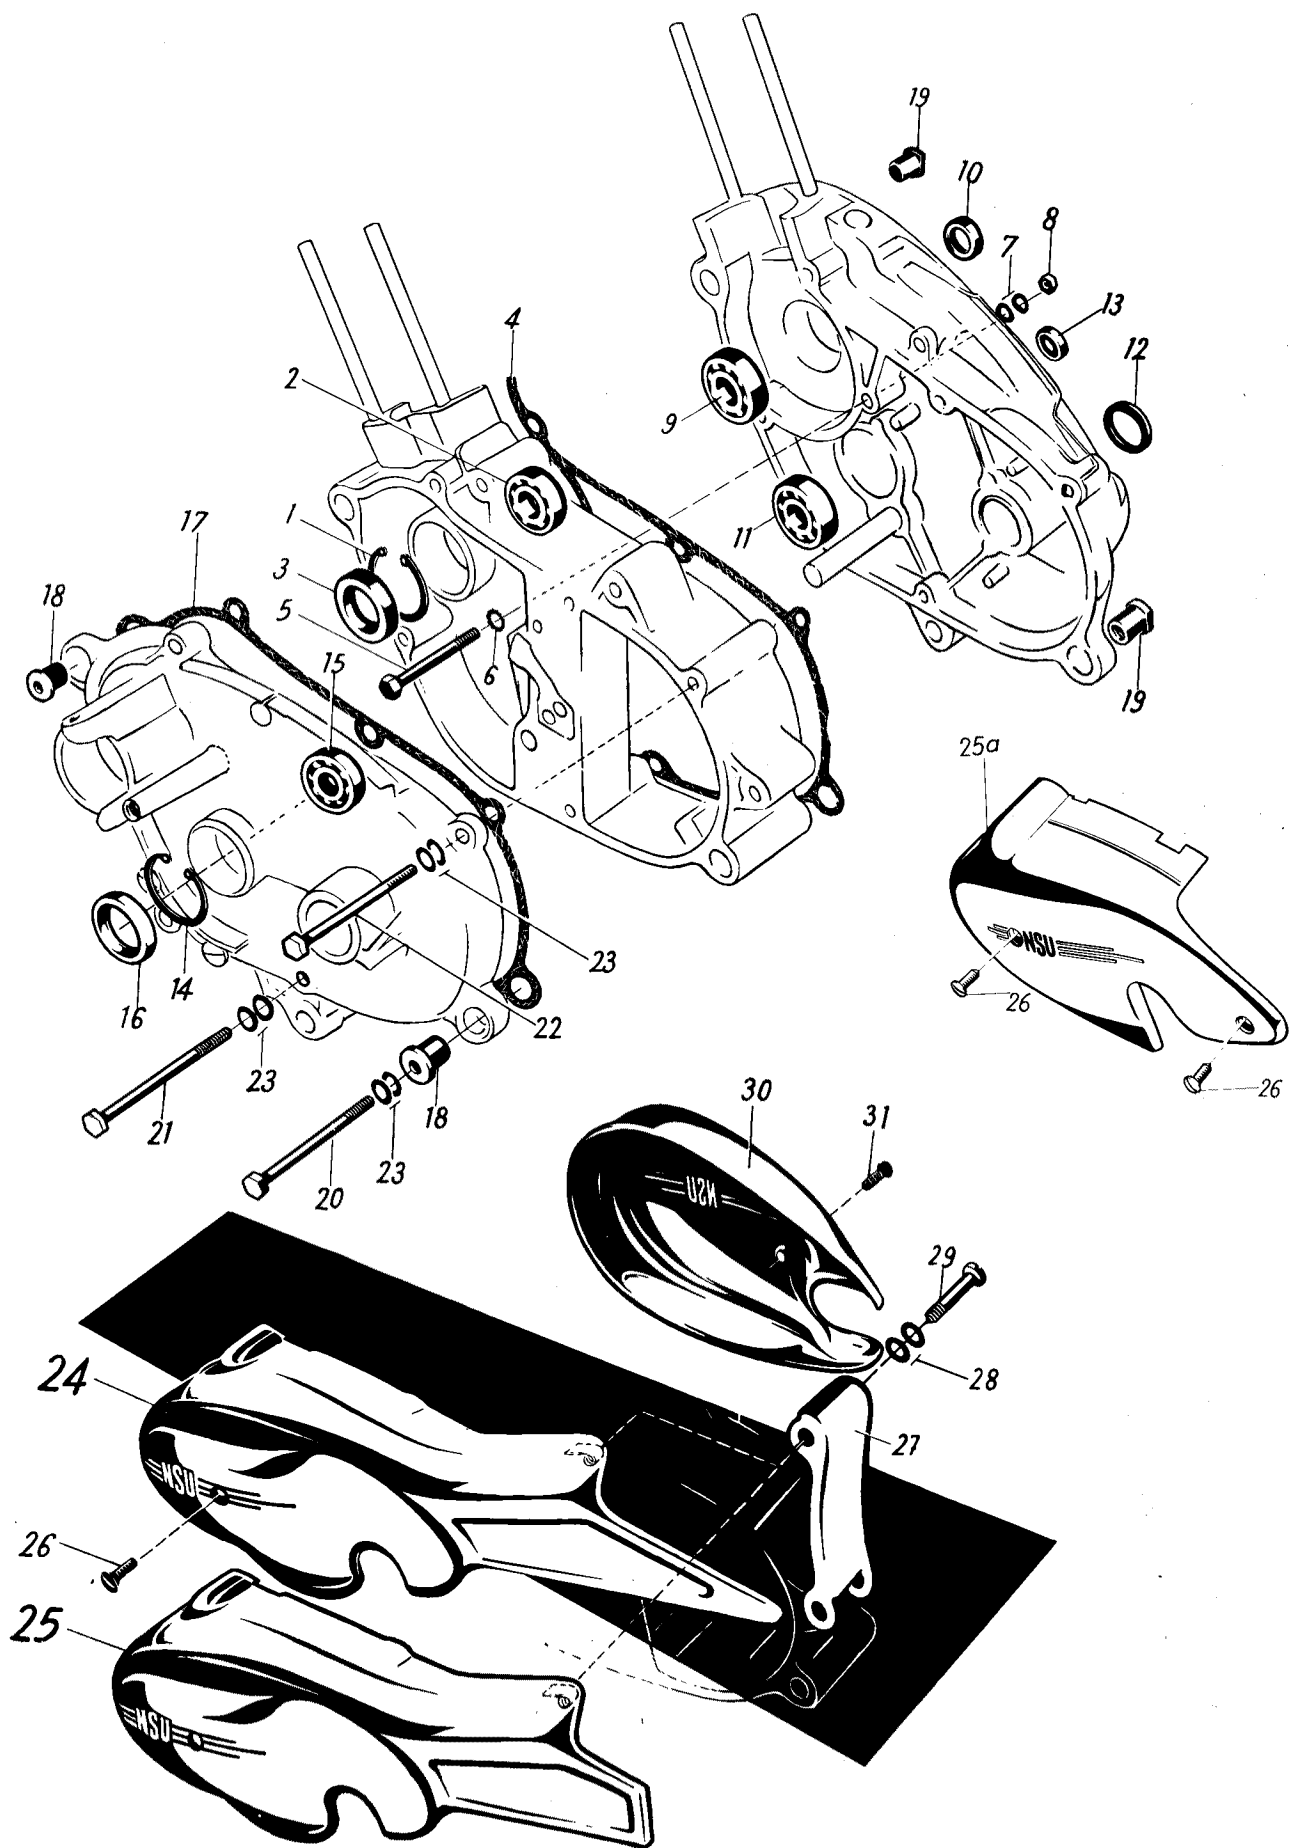

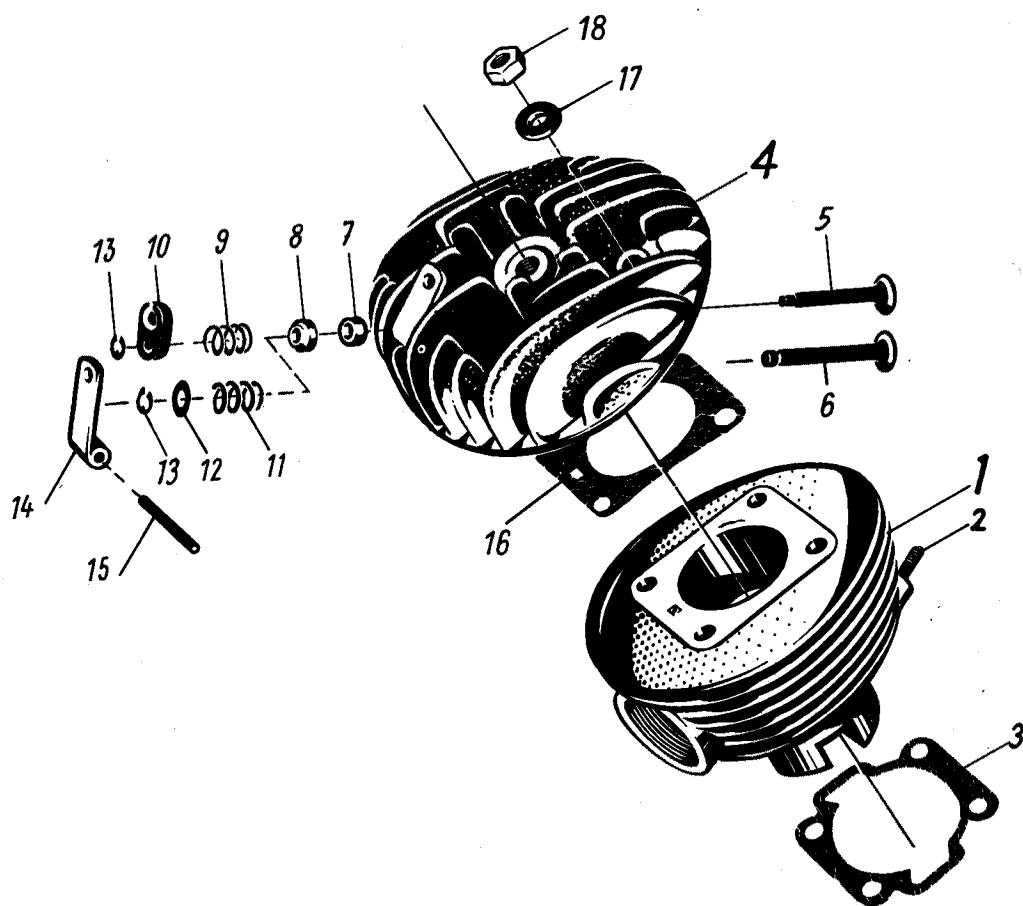



Description	Order-No.	Quantity	Remarks	Illustr.-No.				
QUICKLY								
		3 Gears						
		N-S	L	Cav.	T	TT		
	1 2 3 4 5							
Cylinder with piston	16 02 00 502	1	1	1			height of the cylinder 60,6 mm	—
Cylinder with piston	16 02 01 502				1			→ 2 907 927 / 2 908 109
Cylinder with piston	29 02 00 503				1	1	height of the cylinder 59,6 mm 2 907 928 / 2 908 110 →	—
Cylinder	16 02 00 500	1	1	1				not supplied separately
Cylinder	16 02 01 500				1		→ 2 907 927 / 2 908 109	—
Cylinder	29 02 00 504				1	1	2 907 928 / 2 908 110 →	—
Stud	16 02 00 008	2	2	2				2
Stud	16 02 01 008				2	2		—
Gasket	16 02 00 006	1	1	1	1	1		3
Cylinder head	16 02 00 501	1	1				→ 482 754/522 989 is not supplied 16 02 01 501 and Bowdencable 16 44 01 504 order also	—
Cylinder head	16 02 01 501	1	1	1				482 755/522 990→
Cylinder head	29 02 00 501				1		→ 2 907 927/2 908 109	—
Cylinder head	29 02 00 505				1	1	TT→ 3 902 240/3 902 214 T 2 907 928/2 908 110→	—
Cylinder head	39 02 00 502					1	3 902 241/3 902 215→	—
Valve	16 02 00 004	1	1				→ 482 754/522 989	5
Valve	16 02 01 004	1	1	1	1		L = 44 mm T→ 2 907 927/2 908 109 482 755/522 990→	—
Valve	29 02 00 006				1	1		L = 43 mm, with groove 2 907 928/2 908 110→
Paking	16 02 00 009	1	1	1	1	1		7
Cap	16 02 00 010	1	1	1	1	1		8
Spring	011 095 858	1	1				→ 482 754 / 522 989	9
Thrust plate	16 02 00 005	1	1					
Spring	16 02 00 016	1	1	1	1	1	L = 12 mm 482 755 / 522 990→ TT 3 902 241 / 3 902 215→	11
Washer	16 02 00 015	1	1	1	1	1		
Circlip	11 17 10 993	1	1	1	1	1		13
Release lever	16 02 01 013	1	1	1		1	482 755 / 522 990→ TT 3 902 241 / 3 902 215→	14 for repair
Release lever	29 02 00 003				1	1	→ TT 3 902 240/3 902 214 T 2 900 001 / 2 900 041→	
Rivet	A 3h 11x22 DIN 7341	1	1	1	1	1		15
Circlip	29 02 00 002				1	1	TT → 3 902 240 / 3 902 214 L = 19,5 mm	—
① Spring	—					1	is not supplied	—
Spacking plag adaptor	081 802 089	1	1	1	1	1	for repair	—
Gasket	16 02 00 007	1	1	1	1	1		16
Washer	7,4 DIN 125	4	4	4	4	4		17
Nut	M 7 DIN 934	4	4	4	4	4		18

① Used as replacement

16 02 01 013	Release lever
A 3h 11x22 DIN 7341	Rivet
29 44 01 505	Decompressor cable
4 DIN 6799	Circlip

Description	Order-No.	Quantity					Remarks	Illustr.-No.	
QUICKLY									
		3 Gears							
		N-S	L	Cav.	T	TT			
Flywheel assy	16 04 02 504	1	1	1	1	1		19	
Ball bearing	—	2	2	2	2	2	15x35x11 mm s. page 20, Illustr.-No. 2, 9	—	
Flywheel	16 04 02 011	1	1	1	1	1	normal 4x6 DIN 5402 send in crankshaft assembly + 0,004 4x6 DIN 5402 + 0,002 4x6 DIN 5402 as req. — 0,002 4x6 DIN 5402 — 0,004 4x6 DIN 5402 — 0,006 4x6 DIN 5402	20	
Flywheel	16 04 01 901	1	1	1	1	1		21	
Crankpin	16 04 00 004	1	1	1	1	1		22	
Washer	16 04 01 007	2	2	2	2	2		16,7x33x1 mm	23
Roller	16 04 00 600	16	16	16	16	16		24	
Roller	16 04 00 600	16	16	16	16	16		—	
Roller	16 04 00 600	16	16	16	16	16		—	
Roller	16 04 00 600	16	16	16	16	16		—	
Roller	16 04 00 600	16	16	16	16	16		—	
Roller	16 04 00 600	16	16	16	16	16		—	
Connecting rod	16 04 01 502	1	1	1	1	1		25	
Bush	16 04 00 003	1	1	1	1	1		26	
Shim	012 098 209	as req.	as req.	as req.	as req.	as req.	15,2x22x0,2; 0,3; 0,5 mm NSL → Engine No. 892 389 T → 2 917 622 / 2 917 583 TT → 3 906 876 / 3 906 943	27	
Shim	16 04 00 015	as req.	as req.	as req.	as req.	as req.	16,9x22x0,2 mm	NSL Engine-No. 892 390 →	
Shim	16 04 00 016	as req.	as req.	as req.	as req.	as req.	16,9x22x0,3 mm	T 2 917 623 / 2 917 584 →	
Shim	16 04 00 017	as req.	as req.	as req.	as req.	as req.	16,9x22x0,5 mm	TT 3 906 877 / 3 906 944 →	
Piston w/Cylinder	16 02 00 502	1	1	1				—	
Piston w/Cylinder	16 02 01 502				1		→ 2 907 927 / 2 908 109	—	
Piston w/Cylinder	29 02 00 503				1	1	2 907 928 / 2 908 110 →	—	
Piston	16 04 00 503	1	1	1	1	1	40 mm diam not supplied separately	28	
Piston ring	16 04 00 010	2	2	2	2	2		29	
Grooved stud	16 04 00 014	2	2	2	2	2		—	
Gudgeon pin	16 04 00 009	1	1	1	1	1		30	
Circlip	16 04 00 013	2	2	2	2	2		31	

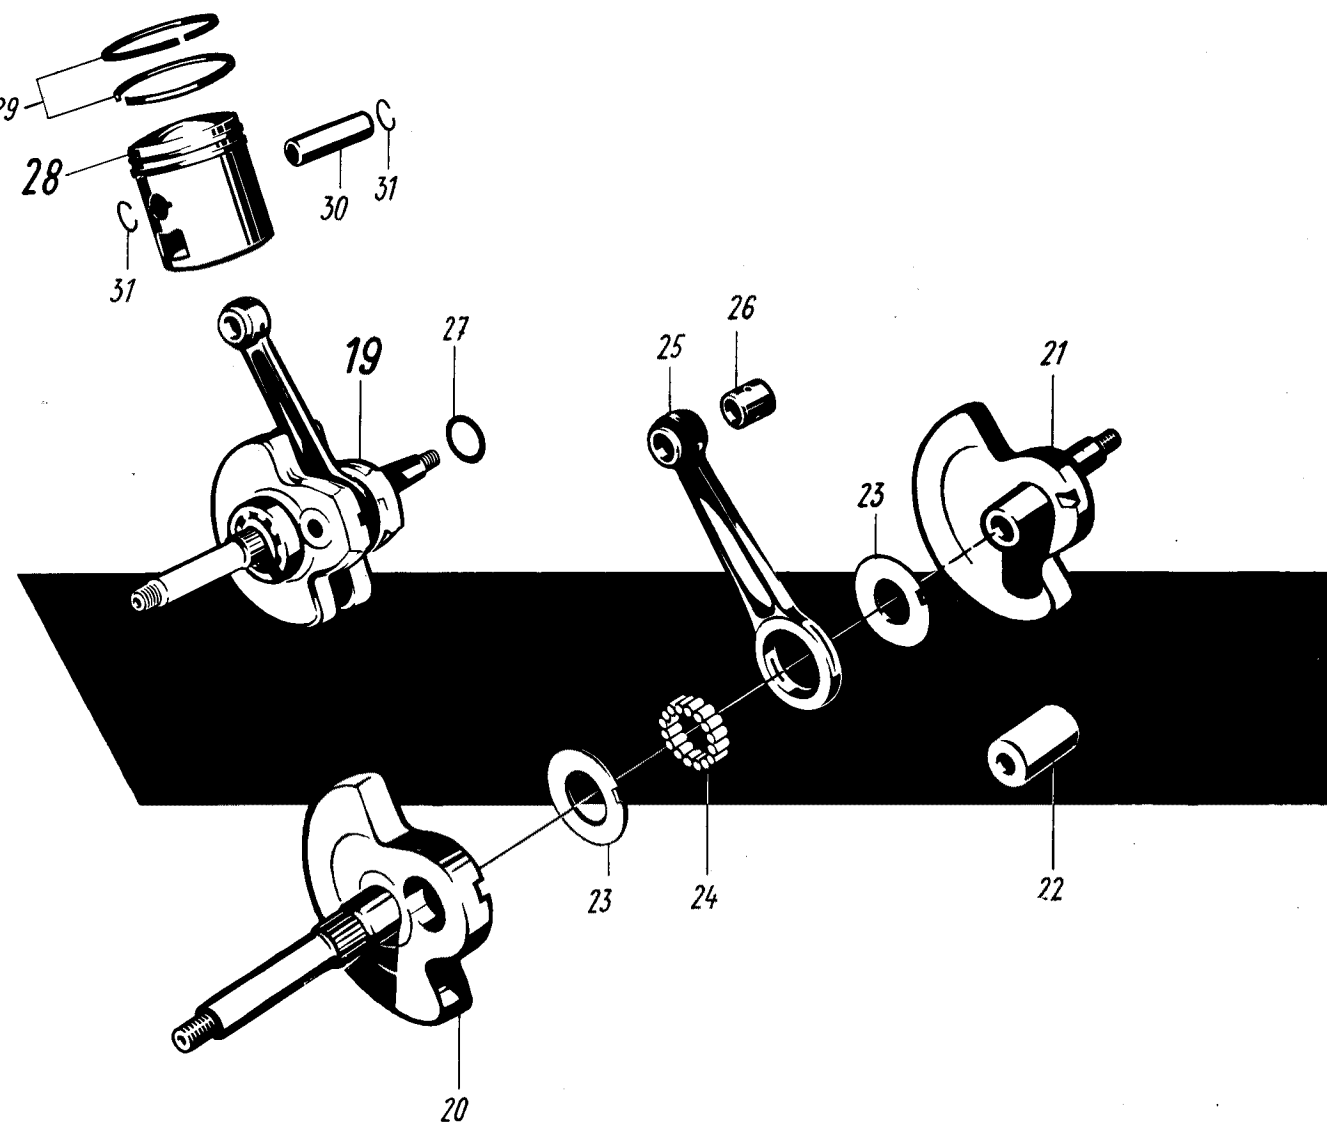

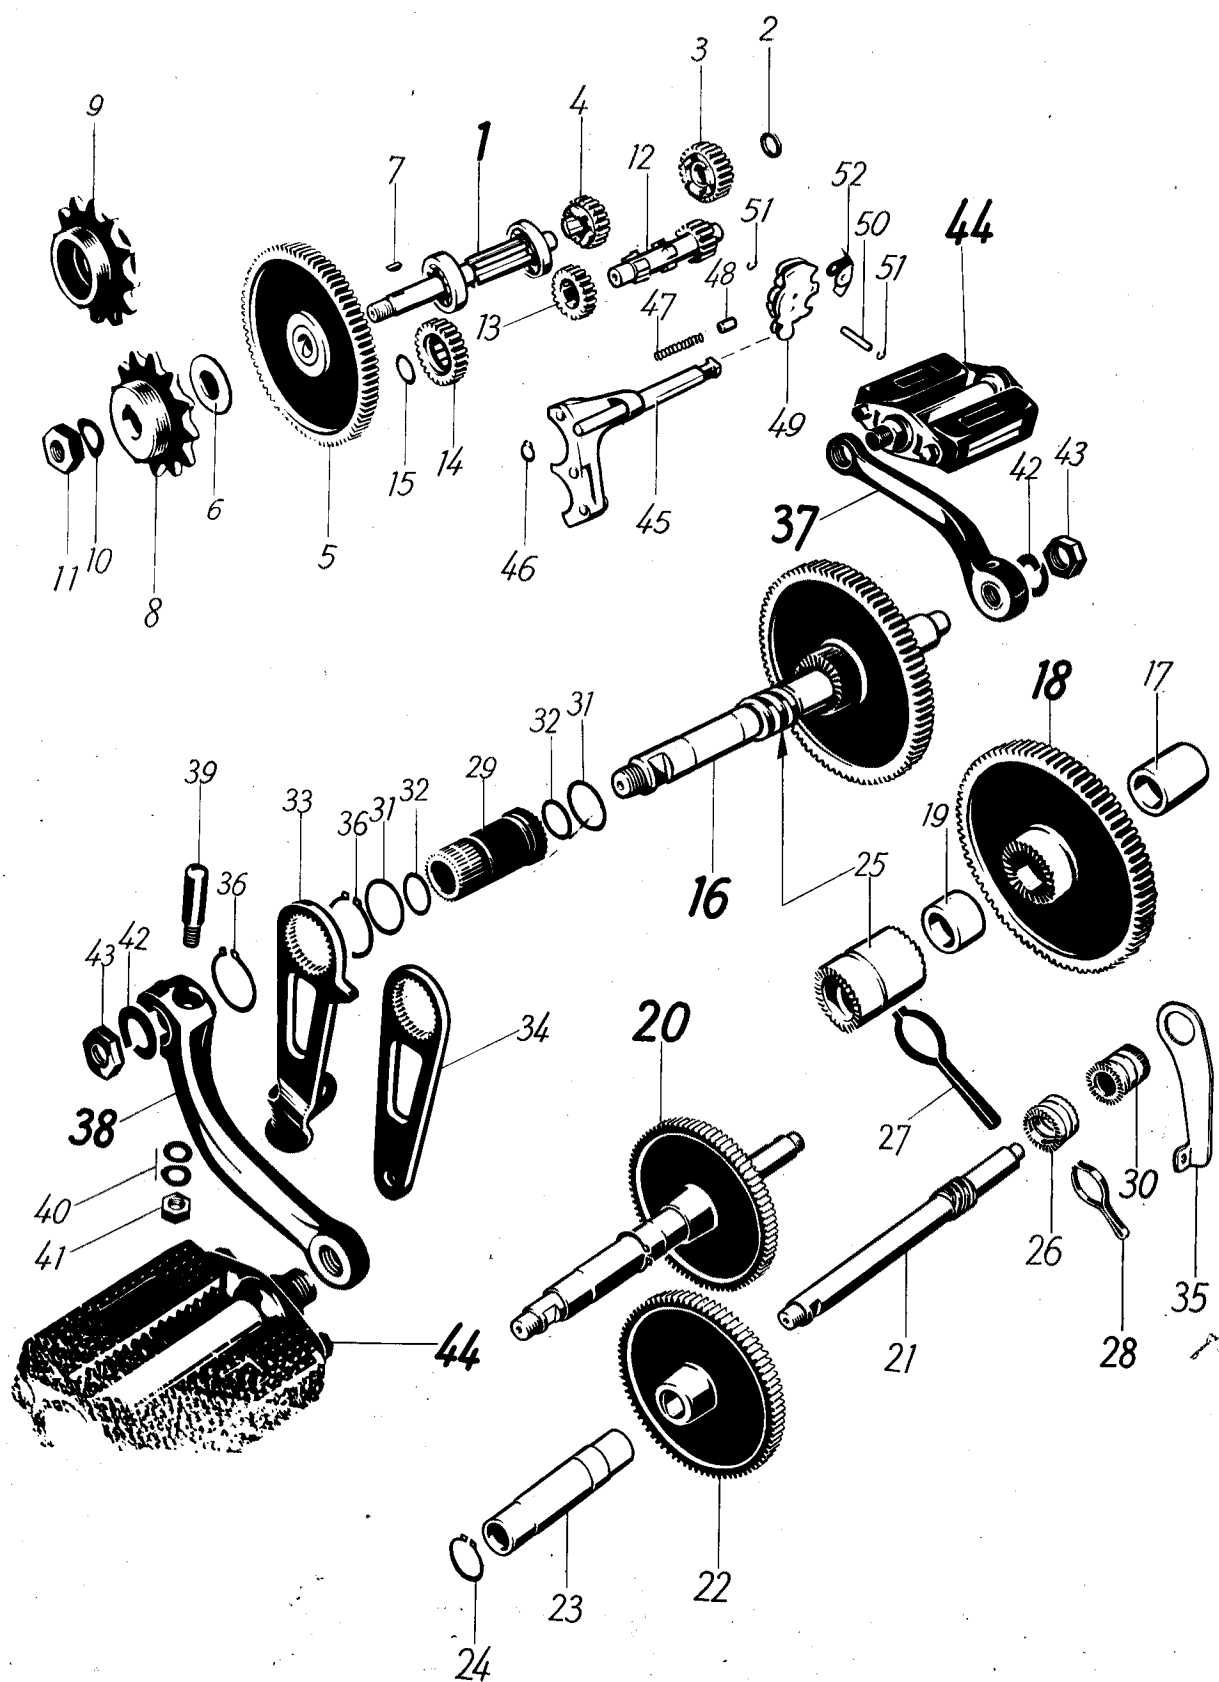


Description	Order-No.	Quantity	Remarks	Illustr.-No.
-------------	-----------	----------	---------	--------------


QUICKLY

		3 Gears					
		N-S	L	Cav.	T	TT	
Main shaft	16 10 02 507	1	1	1	1	1	(123 mm long) 1
Bearing	—	1	1	1	1	1	10x30x9 mm s. page 20 —
Bearing	—	1	1	1	1	1	12x32x10 mm s. page 20, Illustr.-No. 15 —
Washer	16 10 00 007	1	1	1	1	1	10,2x17x1 mm 2
Washer	16 10 00 022	as req.	as req.	as req.	as req.	as req.	12,1x23x0,5 mm —
Gear	16 10 00 508	1	1	1	1	1	25 No of teeth 3
Gear	16 10 01 043	1	1	1	1	1	17 No of theet 4
Gear	16 10 02 502	1	1	1	1	1	16 / 80 No of teeth 5
Gear	16 10 02 401	1	1	1	1	1	16 No of teeth —
Shim	16 10 00 047	as req.	as req.	as req.	as req.	as req.	12,1x23x0,8 mm 6
Woodruff key	3x3,7DIN 6888	1	1	1	1	1	7
Sprocket	16 10 01 009	1	1	1	1	1	12 No of teeth 8
Sprocket	16 10 00 036	1	1	1	1	1	13 No of teeth optional 9
Spring washer	B 10 DIN 137	1	1	1	1	1	10
Nut	M 10x1 DIN 936	1	1	1	1	1	11
Main shaft	16 10 00 042	1	1	1	1	1	16 No of teeth 12
Gear	16 10 01 044	1	1	1	1	1	17 No of teeth 13
Gear	16 10 03 005	1	1	1	1	1	25 No of teeth 14
Washer	16 10 00 048	1	1	1	as req.	1	11,1x17x0,5 mm 15
Washer	29 10 00 012				as req.		11,1x17x0,6 mm —
Washer	29 10 00 013				as req.		11,1x17x0,7 mm —
Washer	29 10 00 014				as req.		11,1x17x0,8 mm —
Washer	29 10 00 015				as req.		11,1x17x0,9 mm —
Crank axle	16 10 01 503	1	1	1			16
Crank axle	16 10 00 010	1	1	1			—
Spacer	16 10 01 015	1	1	1			L = 31,2 mm 17
Gear	16 10 02 012	1	1	1			81 No of teeth 18
Spacer	16 10 00 046	1	1	1			L = 16,8 mm 19
Crank axle	29 10 00 501				1	1	20
Crank axle	29 10 00 003				1	1	21
Gear	29 10 00 008				1	1	22
Spacer	29 10 00 009				1	1	23
Circlip	21x1,2 DIN 471				1	1	24
Driver	16 10 02 011	1	1	1			25
Driver	29 10 00 007				1	1	26
Spring	16 10 00 019	1	1	1			27
Spring	29 10 00 011				1	1	28
Locking member	16 10 00 013	1	1	1			29
Locking member	29 10 00 006				1	1	30
Seal ring	16 10 00 025	2	2	2	2	2	31

① for vehicles No. 728 744 / 803 518
order also

Description	Order-No.	Quantity					Remarks	Illustr.-No.
QUICKLY								
3 Gears								
		N-S	L	Cav.	T	TT		
Seal ring	16 10 00 026	2	2	2	2	2		32
Brake operating lever	16 10 01 014			1 for Bowden cable				33
Brake operating lever	16 10 03 014	1		1 for Brake rod				34
Brake operating lever	16 10 04 014		1					—
Brake operating lever	29 10 00 010				1		for Pränafe-hub	35
Brake operating lever	29 10 01 010				1	1	for NSU-hub	—
Circlip	24x1,2 DIN 471	2	2	2	2		→ 2 904 315 / 2 904 312	36
Circlip	24x1,2 DIN 471				1	1	} 2 904 316 / 2 904 313 →	—
Circlip	22x1,2 DIN 471				1	1		—
Shim	16 10 00 402	as req.	as req.	as req.	as req.	as req.	{ 16,1x21x0,2; 0,4 mm for repair	—
Crank, right	16 10 00 016	1	1	1		1		37
Crank, right	29 10 00 002				1			—
Crank, left	16 10 00 017	1	1	1		1		38
Crank, left	29 10 00 001				1			—
Crank	535 083 635	2	2	2	2	2		39
Spring washer	A 7 DIN 137	4	4	4	4	4		40
Nut	M 7 DIN 934	2	2	2	2	2		41
Spring ring	B 12 DIN 127	2	2	2	2	2		42
Nut	11 55 00 731	2	2	2	2	2		43
Pedal w/reflector	535 083 170	2	2	2	2	2		44
Selector fork	16 14 00 503	1	1	1	1	1		45
Circlip	5 DIN 6799	1	1	1			→ 809 735 / 744 750	—
Circlip	16 14 00 021	1	1	1	1	1	809 736 / 744 751 →	46
Washer	29 14 00 001	1	1	1	1	1		47
Pin	16 14 00 015	1	1	1	1	1		48
Shim	16 14 00 504	1	1	1	1	1		49
Pin	16 14 00 014	1	1	1	1	1		50
Circlip	11 17 10 993	2	2	2	2	2		51
Cap	16 14 00 017	1	1	1	1	1		52

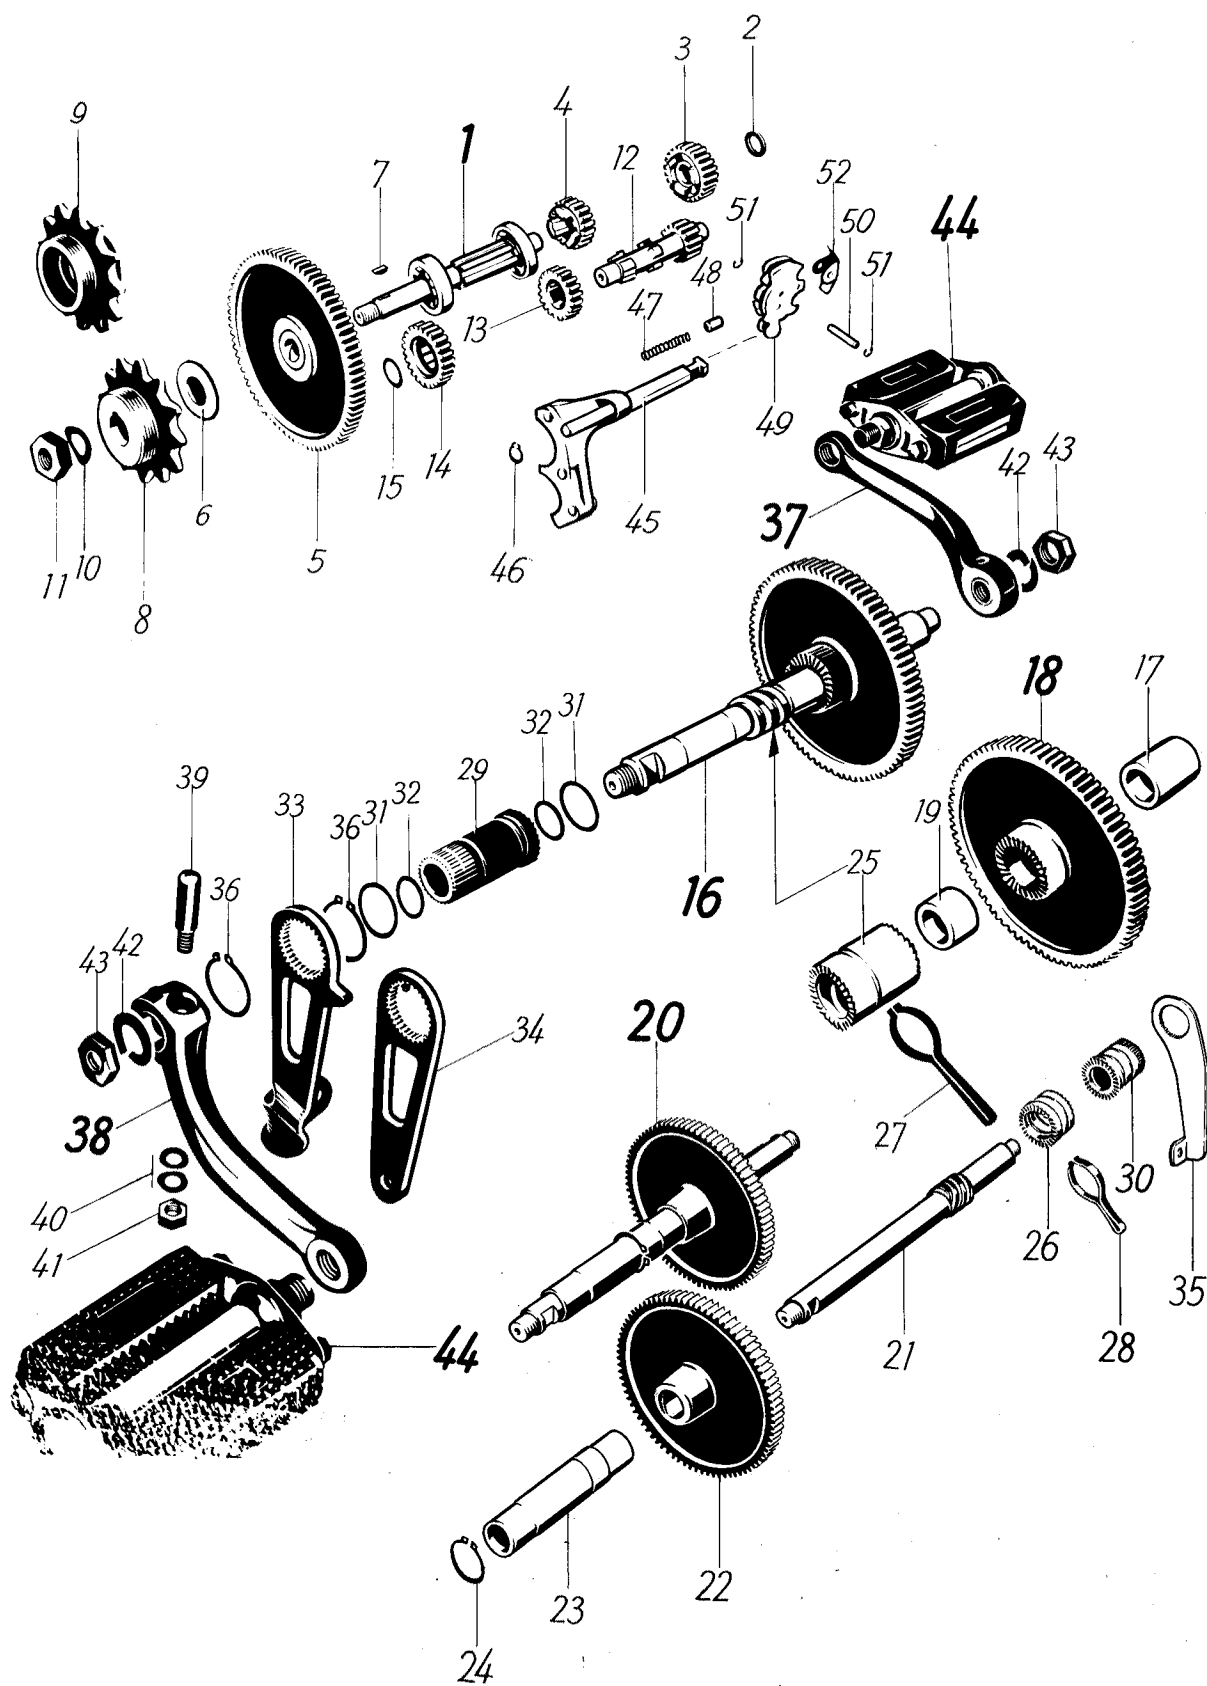

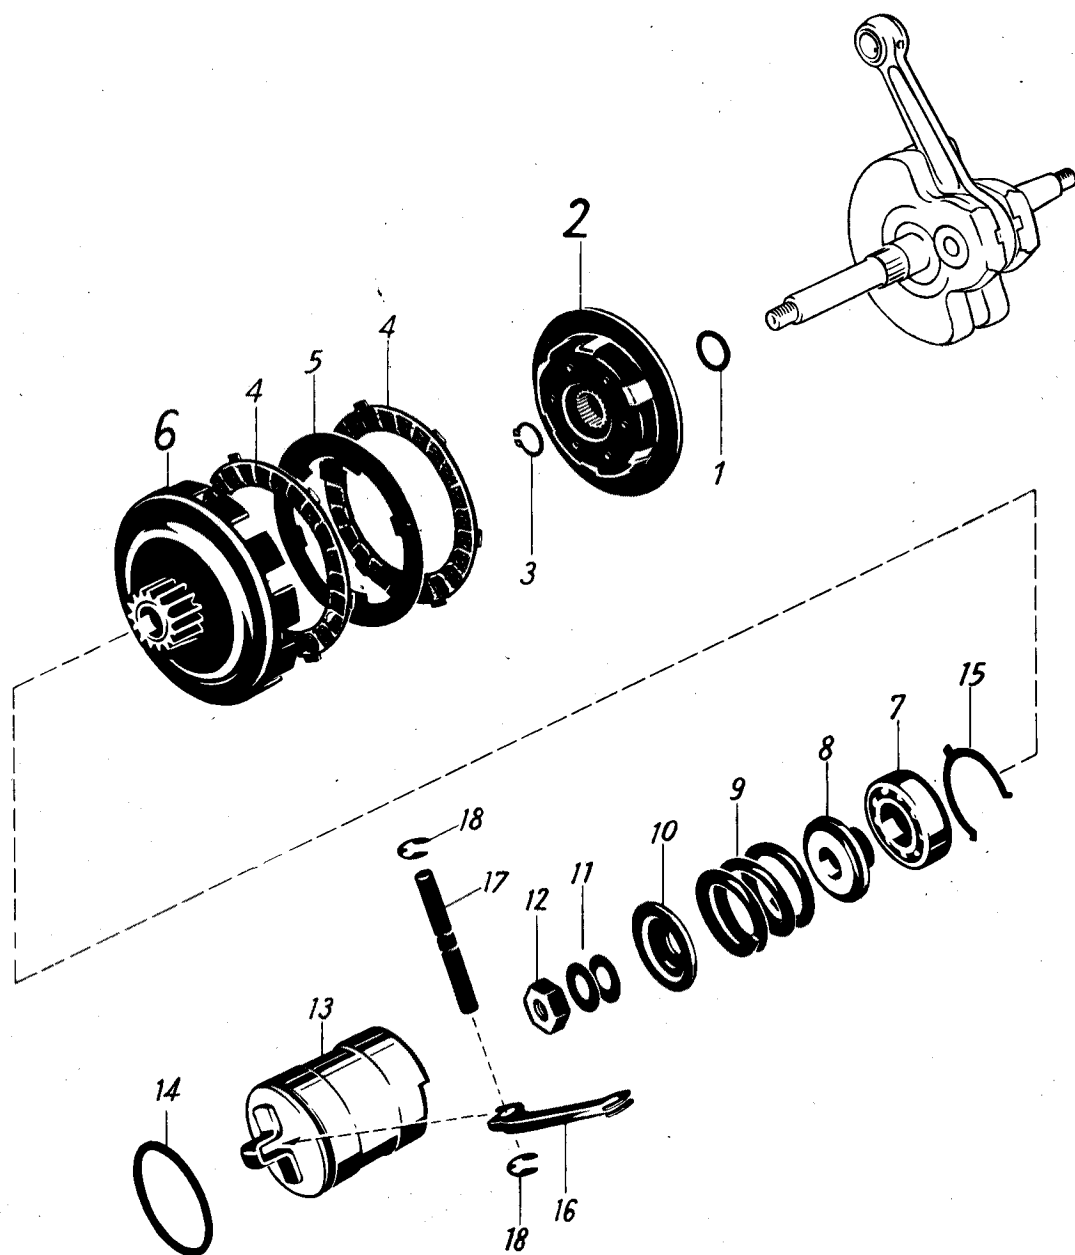




Description Order-No. Quantity Remarks Illustr.-No.




QUICKLY

		3 Gears					
		N-S	L	Cav.	T	TT	
Seal ring	041 401 140	1	1	1	1	1	1
Clutch body, inner	16 13 00 503	1	1	1	1	1	2
Circlip	11x1 DIN 471	1	1	1	1	1	3
Clutch plate	16 13 00 501	2	2	2	2	2	4
Clutch plate	16 13 00 006	1	1	1	1	1	5
Clutch pinion and outer body	16 13 00 502	1	1	1	1	1	6
Bearing	16 13 00 600	1	1	1	1	1	7
Spring retainer, inner	16 13 00 007	1	1	1	1	1	8
Spring	16 13 00 014	1	1	1	1	1	9
Spring retainer, outer	16 13 00 008	1	1	1	1	1	10
Spring washer	A 8 DIN 137	2	2	2	2	2	11
Nut	M 8x1 DIN 934	1	1	1	1	1	12
Clutch cup	16 13 00 504	1	1	1	1	1	13
Seal ring	16 13 00 016	1	1	1	1	1	14
Circlip	16 13 00 012	1	1	1	1	1	15
Clutch lever	16 13 00 011	1	1	1	1	1	16
Spindle	16 13 00 013	1	1	1	1	1	17
Circlip	5 DIN 6799	2	2	2	2	2	18

15x32x9 mm

Description	Order-No.	Quantity					Remarks	Illustr.-No.
QUICKLY								
		3 Gears						
		N-S	L	Cav.	T	TT		
1 2 3								
Starter carburettor 1/12/90	16 16 02 504	1	1	1				1
Starter carburettor 1/12/116	29 16 00 505				1			1a
Starter carburettor 1/12/118	39 16 00 502					1		—
Carburettor body	16 16 01 920	1	1	1				2
Carburettor body	29 16 02 904				1			—
Carburettor body	39 16 01 900					1		—
Main jet	16 16 00 910	1	1	1	1	1	{ 1/12/90 = 64 1/12/116 = 52 1/12/118 = 60 }	3
Needle jet	16 16 01 909	1	1	1	1	1		4
Seal ring	16 16 00 917	1	1	1	1	1		5
Screw plug	16 16 00 908	1	1	1	1	1		6
Throttle slide	16 16 01 905	1	1	1				7
Throttle slide	16 16 02 905				1	1		—
Washer	16 16 00 928				1	1		—
Jet needle	16 16 01 904	1	1	1	1	1		8
Circlip	16 16 00 915	1	1	1	1	1		9
Spring	16 16 00 913	1	1	1	1	1		10
Air slide	16 16 00 926	1	1	1	1	1		11
Gasket	16 16 00 927	1	1	1	1	1		12
Cap	16 16 01 916	1	1	1	1	1		13
Tube	29 16 00 903				1			13a
Spring	16 16 00 925	1	1	1	1	1		14
Pin	16 16 01 924	1	1	1	1	1	L = 23 mm	15
Screw	16 16 01 901	1	1	1		1		16
Nut	16 16 01 918	1	1	1		1	M 6	17
Screw	16 16 00 923	2	2	2	2	2		18
Float	16 16 00 902	1	1	1	1	1		19
Needle	16 16 00 903	1	1	1	1	1		20
Float chamber cover	16 16 00 919	1	1	1				21
Float chamber cover	29 16 00 901				1			21a
Float chamber cover	39 16 00 901					1		—
Swivelling hose adaptor	29 16 00 902				1			21b
Seal ring	35 16 00 911				2			21c
Nut	29 16 00 905				1			21d
Seal ring	16 16 00 912	1	1	1	1	1		22
Tickler	16 16 00 911	1	1	1				23
Spring	16 16 00 906	1	1	1				24
Split-pin	16 16 00 907	1	1	1				25
Screw	16 16 00 914	2	2	2	2	2		26

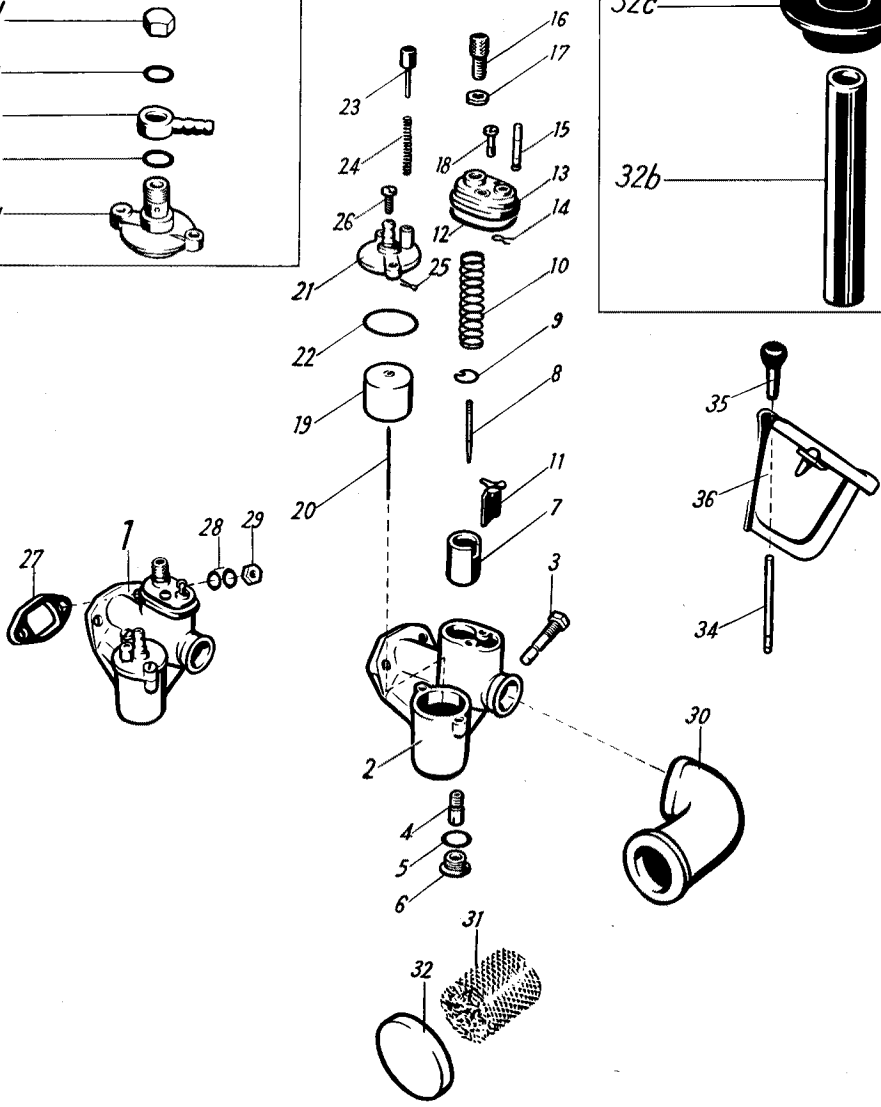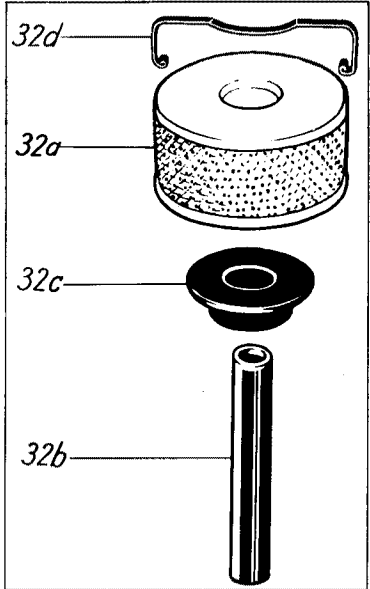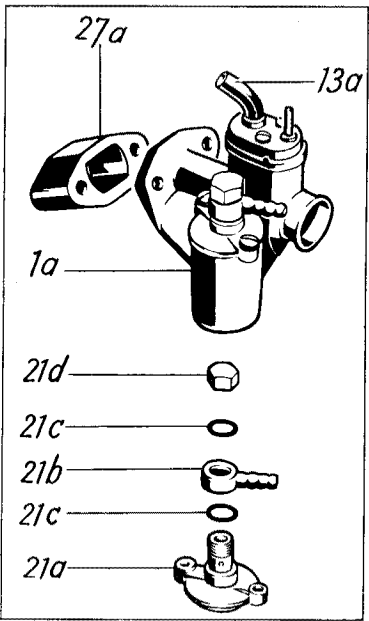

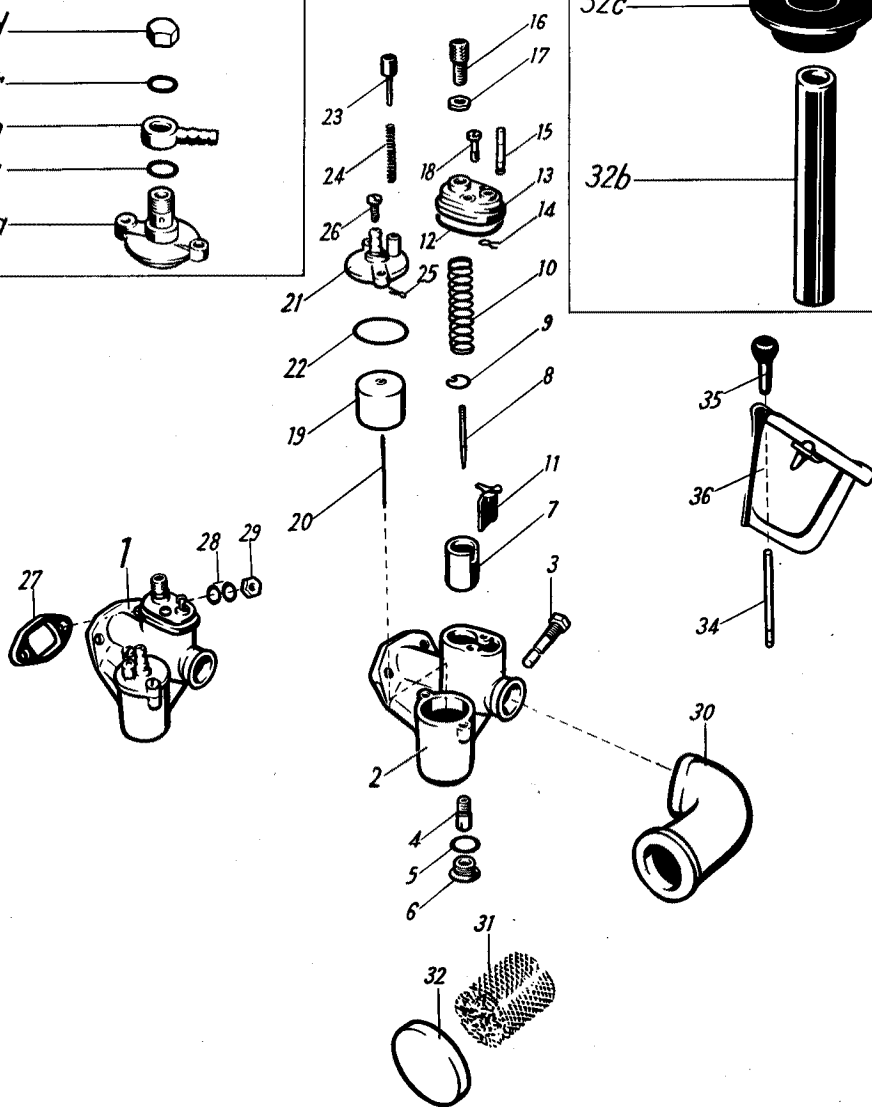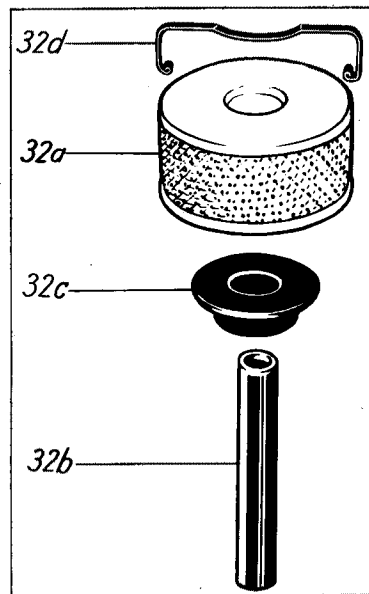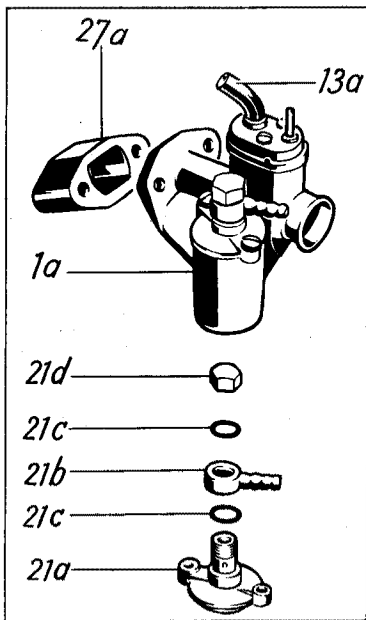


Description Order-No. Quantity Remarks Illustr.-No.


QUICKLY

		3 Gears					
		N-S	L	Cav.	T	TT	
Gasket	16 16 00 008	1	1	1			27
Gasket	16 16 01 008				1	1	27a
Spring washer	B 5 DIN 137	4	4	4	4	4	28
Nut	M 5 DIN 934	2	2	2	2	2	29
Hose	16 16 01 006	1	1				30
Hose	16 16 00 006			1	1	1	s. page 10, Illustr.-No. 25 —
Air filter	16 16 01 009	1	1				32 mm diam 31
Air filter	16 16 00 022			1			—
Cap	16 16 00 017	1	1				32
Cap	16 16 00 023			1			—
Air filter	29 16 00 501				1	1	32a
Rubber hose	29 16 00 003				1	1	32b
Seal ring	29 16 00 002				1		32c
Seal ring	39 16 00 001					1	—
Clamp	29 16 00 004				1	1	32d
Pin	16 16 00 019	1	1				} 62 mm for legshield
Knob	16 16 00 018	1	1				
Lid for leg-guard	16 93 01 519	1	1				

Description	Order-No.	Quantity				Remarks	Illustr.-No.
QUICKLY							
		3 Gears					
		N-S	L	Cav.	T		
						s. page 15	
Magneto-generator 17 Watt	16 17 00 503	1	1	1		{ Bosch LMUP 1 / 115 / 17 L 2 is not delivered for 3 Watt lighting installation order also head lamp inset and electric bulb continuously dimmed and 2 Watt-Tail lamp (s. Page 54)	1
Base plate	16 17 00 933	1	1	1			2
Ignition coil	16 17 00 920	1	1	1			3
Spring ring	B 4 DIN 127	2	2	2		{ 321 394 / 338 767 → → 358 398 / 377 954	—
Screw	M 4x20 DIN 84	2	2	2			—
Lighting coil w/cable	16 17 00 922	1	1	1			4
Spring ring	B 4 DIN 127	2	2	2		{ 18 mm diam felt with spring } as felt with angle } required	—
Screw	M 4x22 DIN 84	2	2	2			—
Condenser	16 17 10 905	1	1	1			5
Lubricating felt	16 17 00 924	1	1	1		{ 18 mm diam felt with spring } as felt with angle } required	—
Lubricating felt	041 410 523	1	1	1			—
Contact holder	16 17 00 925	1	1	1			—
Spring ring	B 4 DIN 127	1	1	1		{ 18 mm diam felt with spring } as felt with angle } required	—
Washer	4,3 DIN 433	1	1	1			—
Screw	M 4x12 DIN 84	1	1	1			—
Pivot for contact breaker	16 17 00 926	1	1	1		{ 18 mm diam felt with spring } as felt with angle } required	—
Contact breaker	16 17 00 927	1	1	1			—
Shim	011 098 150	as req.	as req.	as req.			—
Washer	4,3 DIN 433	1	1	1		{ 18 mm diam felt with spring } as felt with angle } required	—
Spring ring	011 098 151	1	1	1			—
Screw	M 3x10 DIN 933	1	1	1			—
Washer	3,7 DIN 125	1	1	1		{ 18 mm diam felt with spring } as felt with angle } required	—
Insulating washer, large	041 410 090	2	2	2			—
Insulating washer, small	041 410 091	2	2	2			—
Spring ring	B 3 DIN 127	1	1	1		{ 18 mm diam felt with spring } as felt with angle } required	—
Nut	M 3 DIN 934	1	1	1			—
H. T. Lead	16 17 00 900	1	1	1			—
H. T. Lead	16 17 01 900	1	1	1		{ 18 mm diam felt with spring } as felt with angle } required	6
Terminal plate	16 17 00 928	1	1	1			7
Terminal screw	16 17 00 929	1	1	1			—
Flywheel	16 17 00 931	1	1	1		{ Inner diam 90,5 mm 321 394 / 338 767 → → 358 398 / 377 954	8

Fixing parts s. page 31

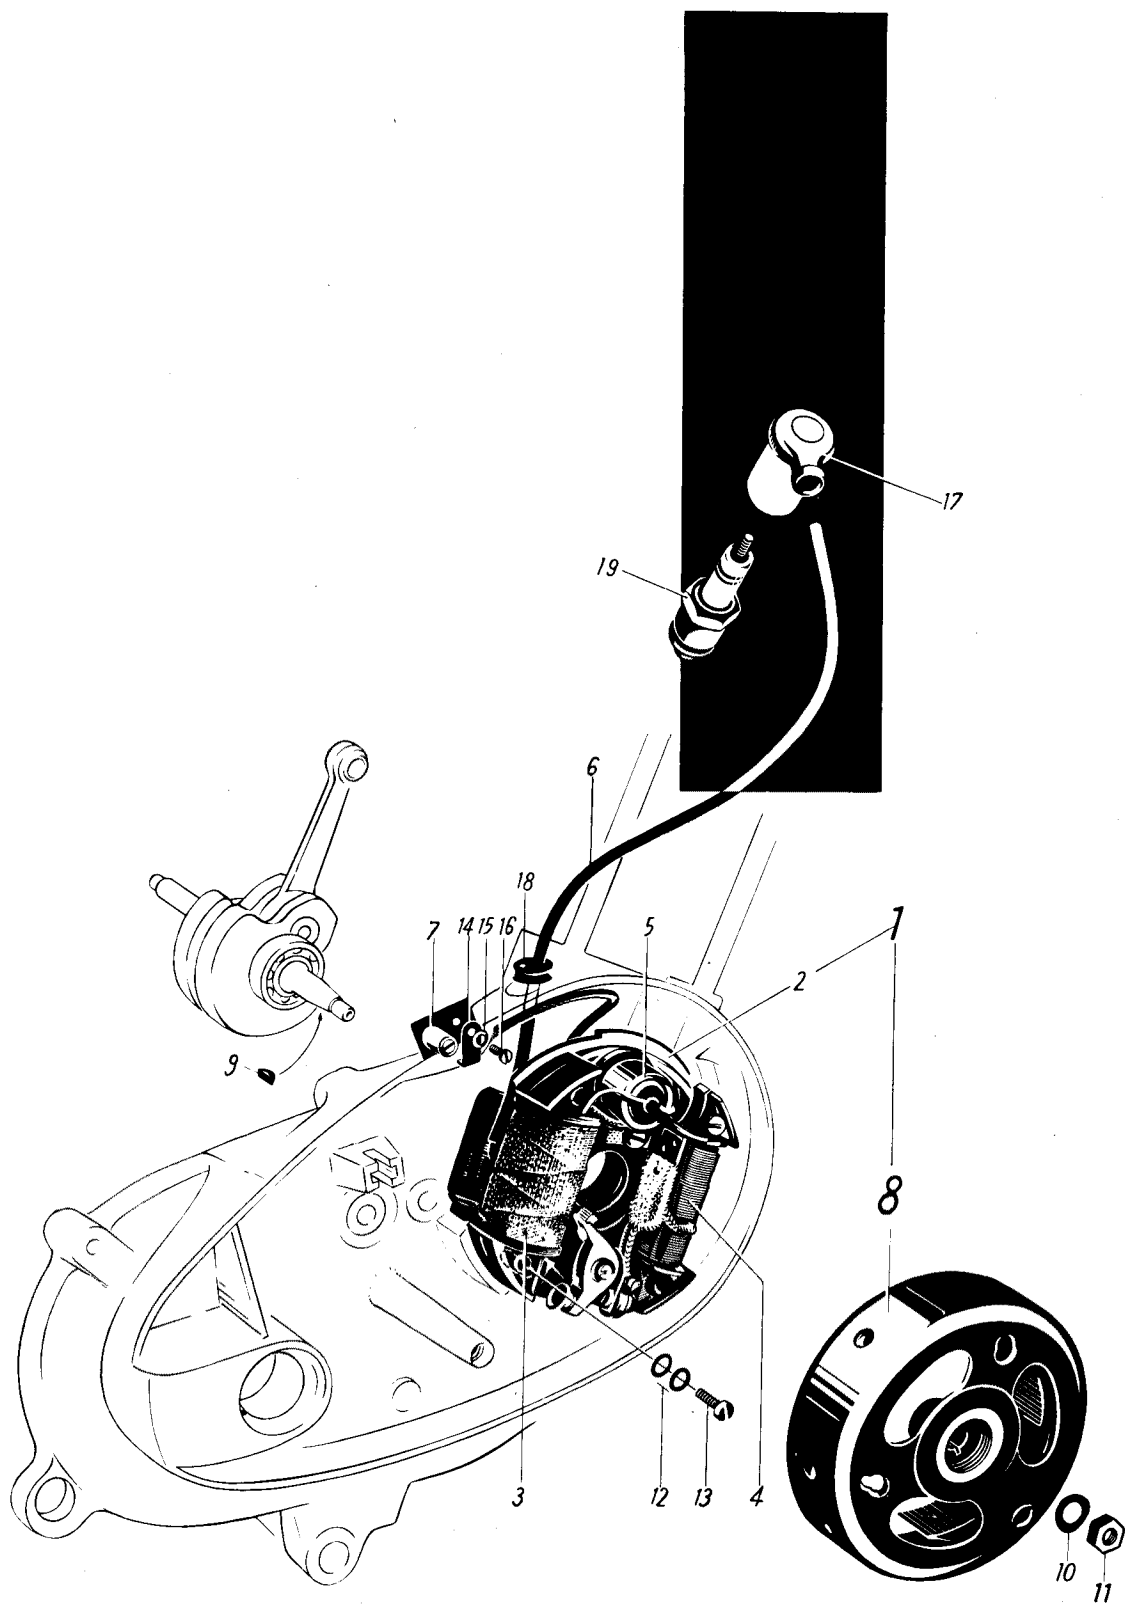


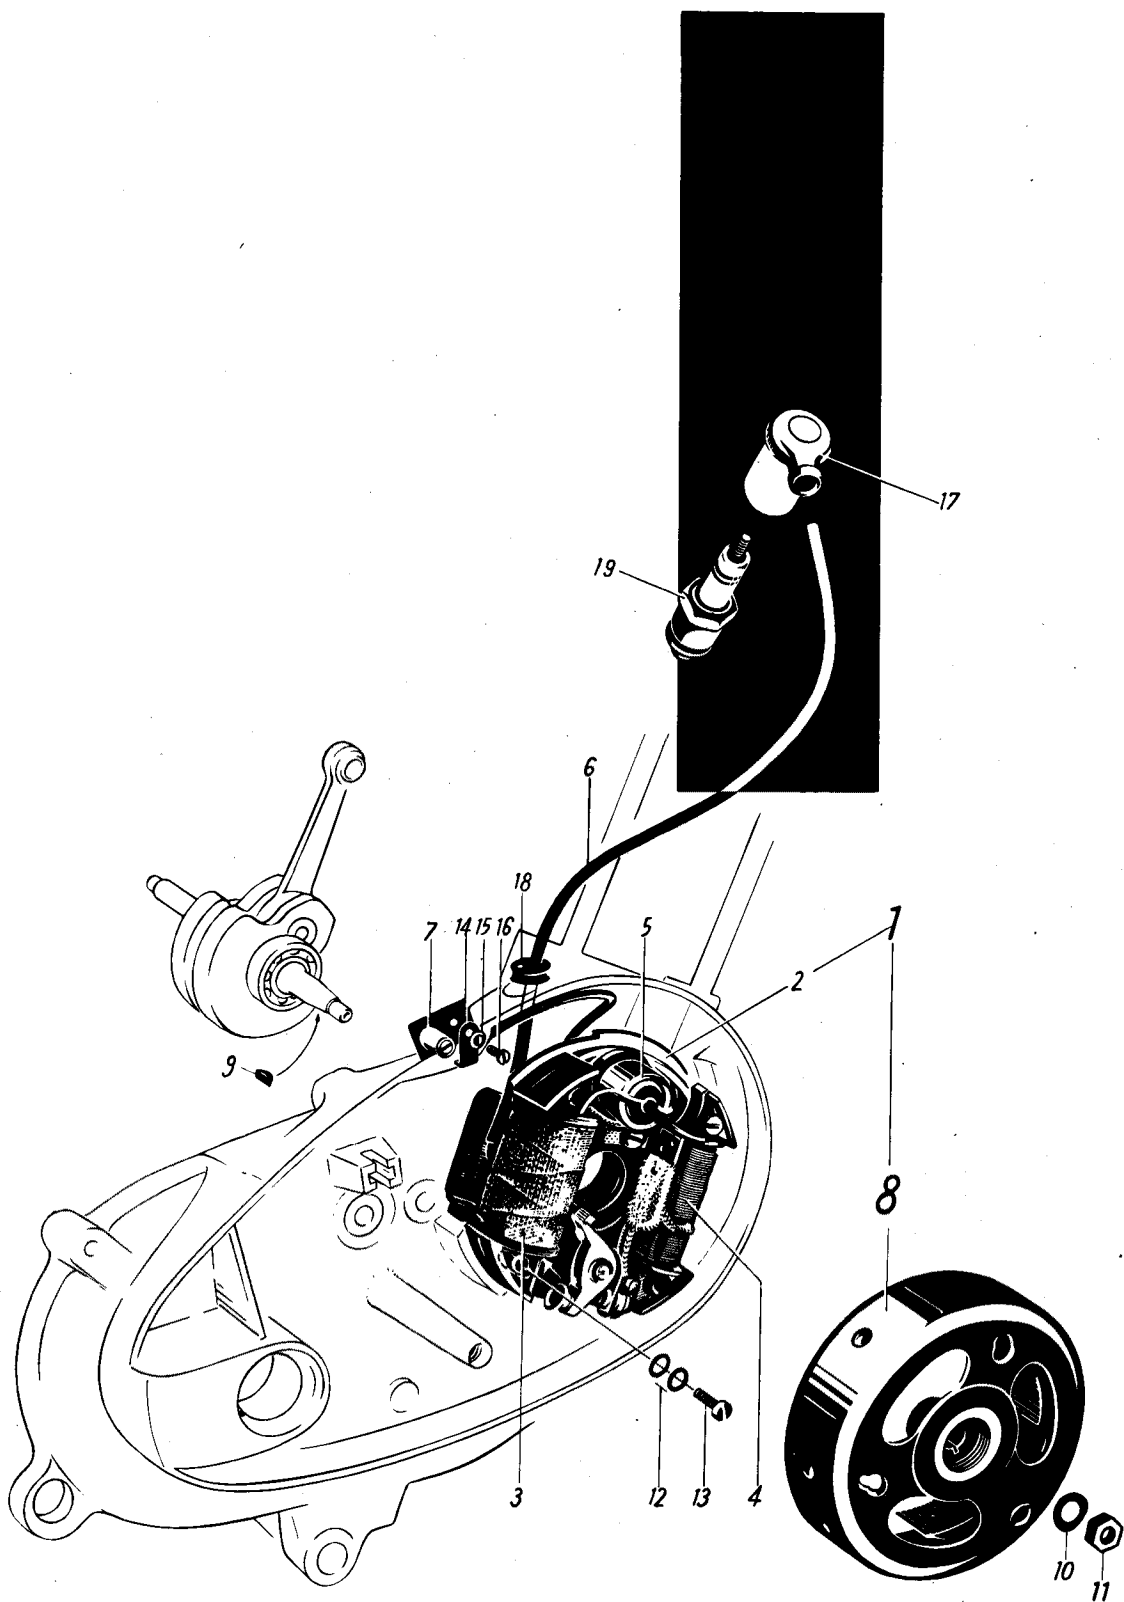


Description	Order-No.	Quantity				Remarks	Illustr.-No.
QUICKLY							
		3 Gears					
		N-S	L	Cav.	T		
	1 2				s. page 15		
Magneto-generator 17 Watt	16 17 01 503	1	1	1		Bosch LM/UPA 1 / 115 / 17 L 4a for 3 Watt lighting installation order also head lamp inset and electric bulb continuously dimmed and 2 Watt-Tail lamp (s. Page 54)	1
Base plate	16 17 01 933	1	1	1			2
Ignition coil	16 17 01 920	1	1	1			3
Lighting coil	16 17 01 922	1	1	1			4
Spring ring	B 4 DIN 127	4	4	4			—
Screw	M 4x22 DIN 84	2	2	2			—
Screw	M 4x25 DIN 84	2	2	2			—
Condenser	16 17 10 905	1	1	1		18 mm diam	5
Lubricating felt	16 17 00 924	1	1	1		felt with spring } as required felt with angle }	—
Lubricating felt	041 410 523	1	1	1			—
Contact holder	16 17 00 925	1	1	1			—
Spring ring	B 4 DIN 127	1	1	1			—
Washer	4,3 DIN 433	1	1	1			—
Screw	M 4x12 DIN 84	1	1	1			—
Pivot for contact breaker lever	16 17 00 926	1	1	1		358 399 / 377 955 →	—
Contact breaker lever	16 17 00 927	1	1	1			—
Shim	011 098 150	as req.	as req.	as req.			—
Washer	4,3 DIN 433	1	1	1			—
Spring ring	011 098 151	1	1	1			—
Bolt	M 3x10 DIN 933	1	1	1			—
Washer	3,7 DIN 125	1	1	1			—
Insulating washer, large	041 410 090	2	2	2			—
Insulating washer, small	041 410 091	1	1	1			—
Spring ring	B 3 DIN 127	1	1	1			—
Nut	M 3 DIN 934	1	1	1			—
H. T. Lead	16 17 01 900	1	1	1		L = 290 mm; 7 mm diam	6
Insulating clamp	16 17 00 936	1	1	1			—
Terminal plate	16 17 00 928	1	1	1			7
Terminal screw	16 17 00 929	1	1	1		4 mm	—
Flywheel	16 17 01 931	1	1	1		Inner diam 85,5 mm	8

Fixing parts s. page 31

Description	Order-No.	Quantity					Remarks	Illustr.-No.
QUICKLY								
		3 Gears						
		N-S	L	Cav.	T	TT		
		s. page 15						
Magneto-generator 17 Watt	16 17 01 504	1	1	1			{ NORIS ELZJ 17/4 L not supplied 321 394 / 338 767 → → 542 388 / 588 147	—
Magneto-generator 17 Watt	16 17 02 504	1	1	1		1	{ NORIS ELZJE 17/2 L 542 389 / 588 148 →	1
Base plate	16 17 11 932	1	1	1		1		2
Ignition coil	16 17 11 903	1	1	1		1	155 054 / 165 434 →	3
Lock washer	A 4,3 DIN 6798	2	2	2		2		—
Screw	AM 4x19 DIN 84	2	2	2		2		—
Lighting coil	16 17 10 916	1	1	1			→ 321 393 / 338 766	—
Lighting coil	16 17 10 904	1	1	1			{ 321 394 / 338 767 → → 542 388 / 588 147	4
Lighting coil	16 17 12 904	1	1	1		1	542 389 / 588 148 →	—
Lock washer	A 4,3 DIN 6798	2	2	2		2		—
Screw	AM 4x16 DIN 84	2	2	2			→ 321 393 / 338 766	—
Screw	AM 4x25 DIN 84	2	2	2		2	{ pay attention to length 321 394 / 338 767 →	—
Screw	AM 4x21 DIN 84	2	2	2		2		—
Condenser	11 17 10 916	1	1	1			{ 17 mm diam → 155 053 / 165 433	—
Condenser	16 17 10 905	1	1	1		1	{ 18 mm diam 155 054 / 165 434 →	5
Insulating plate	16 17 10 906	1	1	1		1		—
Lubricating felt	16 17 00 924	1	1	1		1	felt with spring } as felt with angle } required	—
Lubricating felt	041 410 523	1	1	1		1		—
Spring ring	B 4 DIN 127	1	1	1		1		—
Screw	AM 4x8 DIN 84	1	1	1		1		—
Contact holder	16 17 10 908	1	1	1		1		—
Eccentric pin	16 17 10 907	1	1	1		1		—
Spring ring	B 4 DIN 127	1	1	1		1		—
Washer	11 17 10 994	1	1	1		1		—
Screw	AM 4x10 DIN 84	1	1	1		1		—
Pivot for contact breaker lever	16 17 10 909	1	1	1		1		—

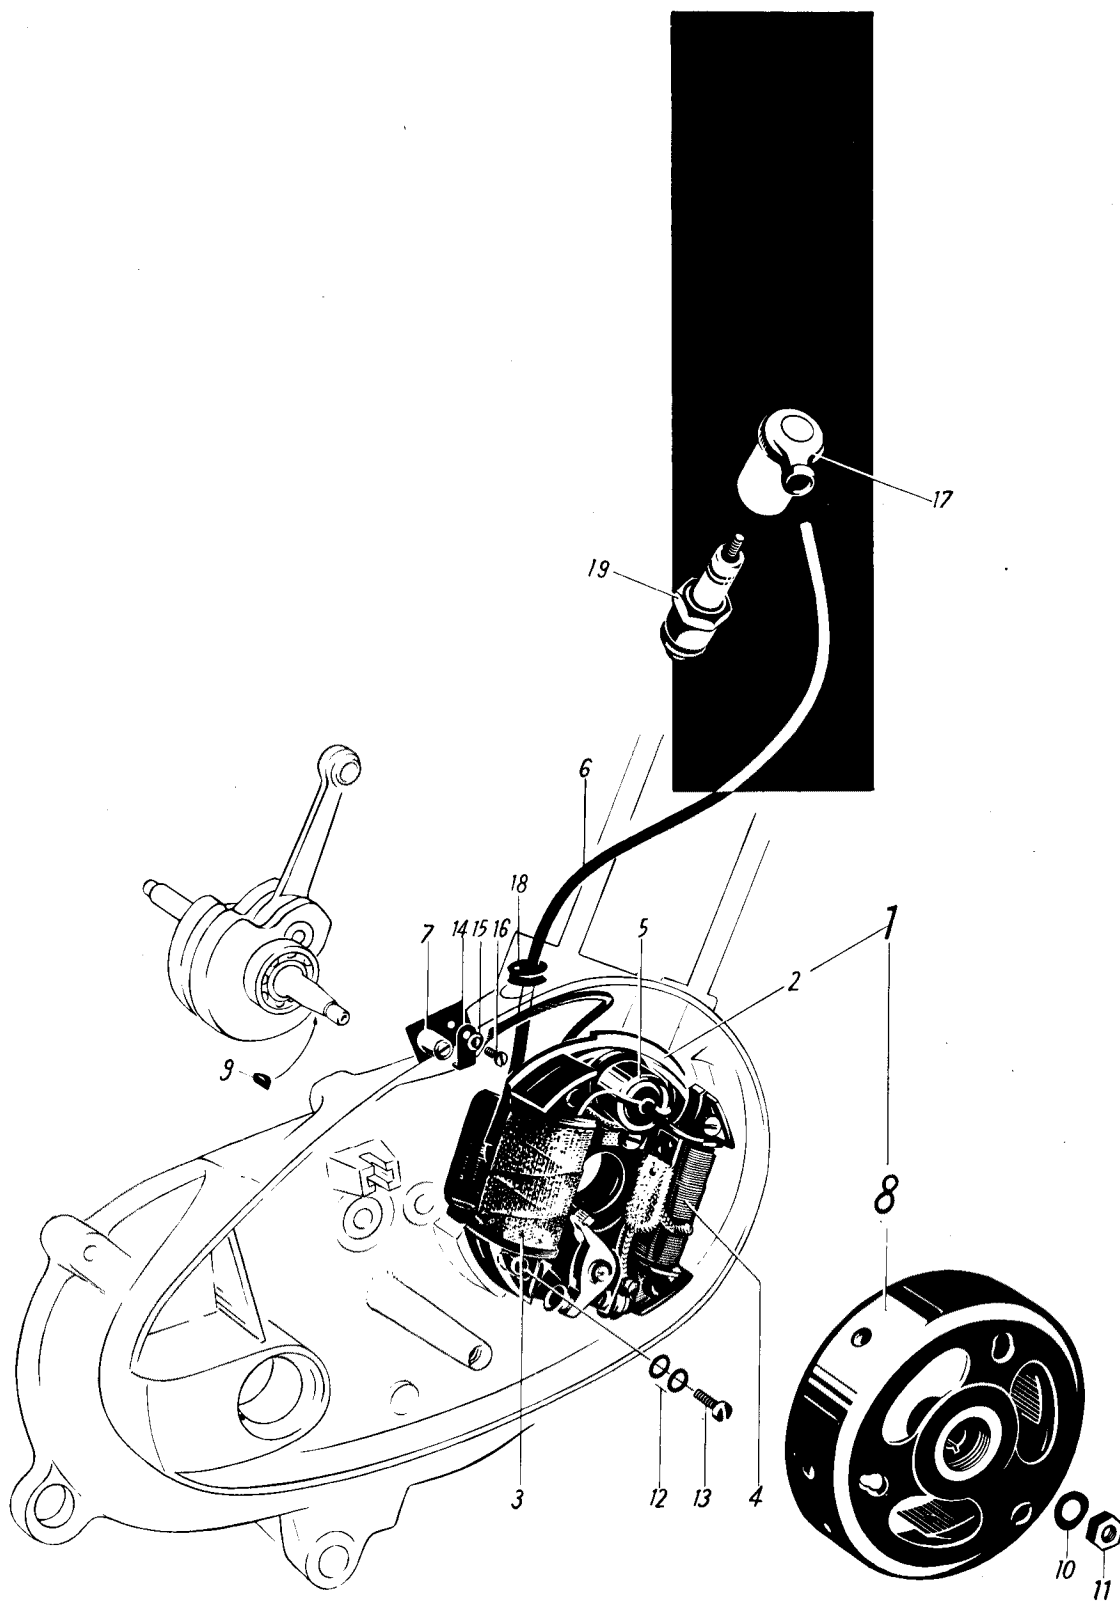

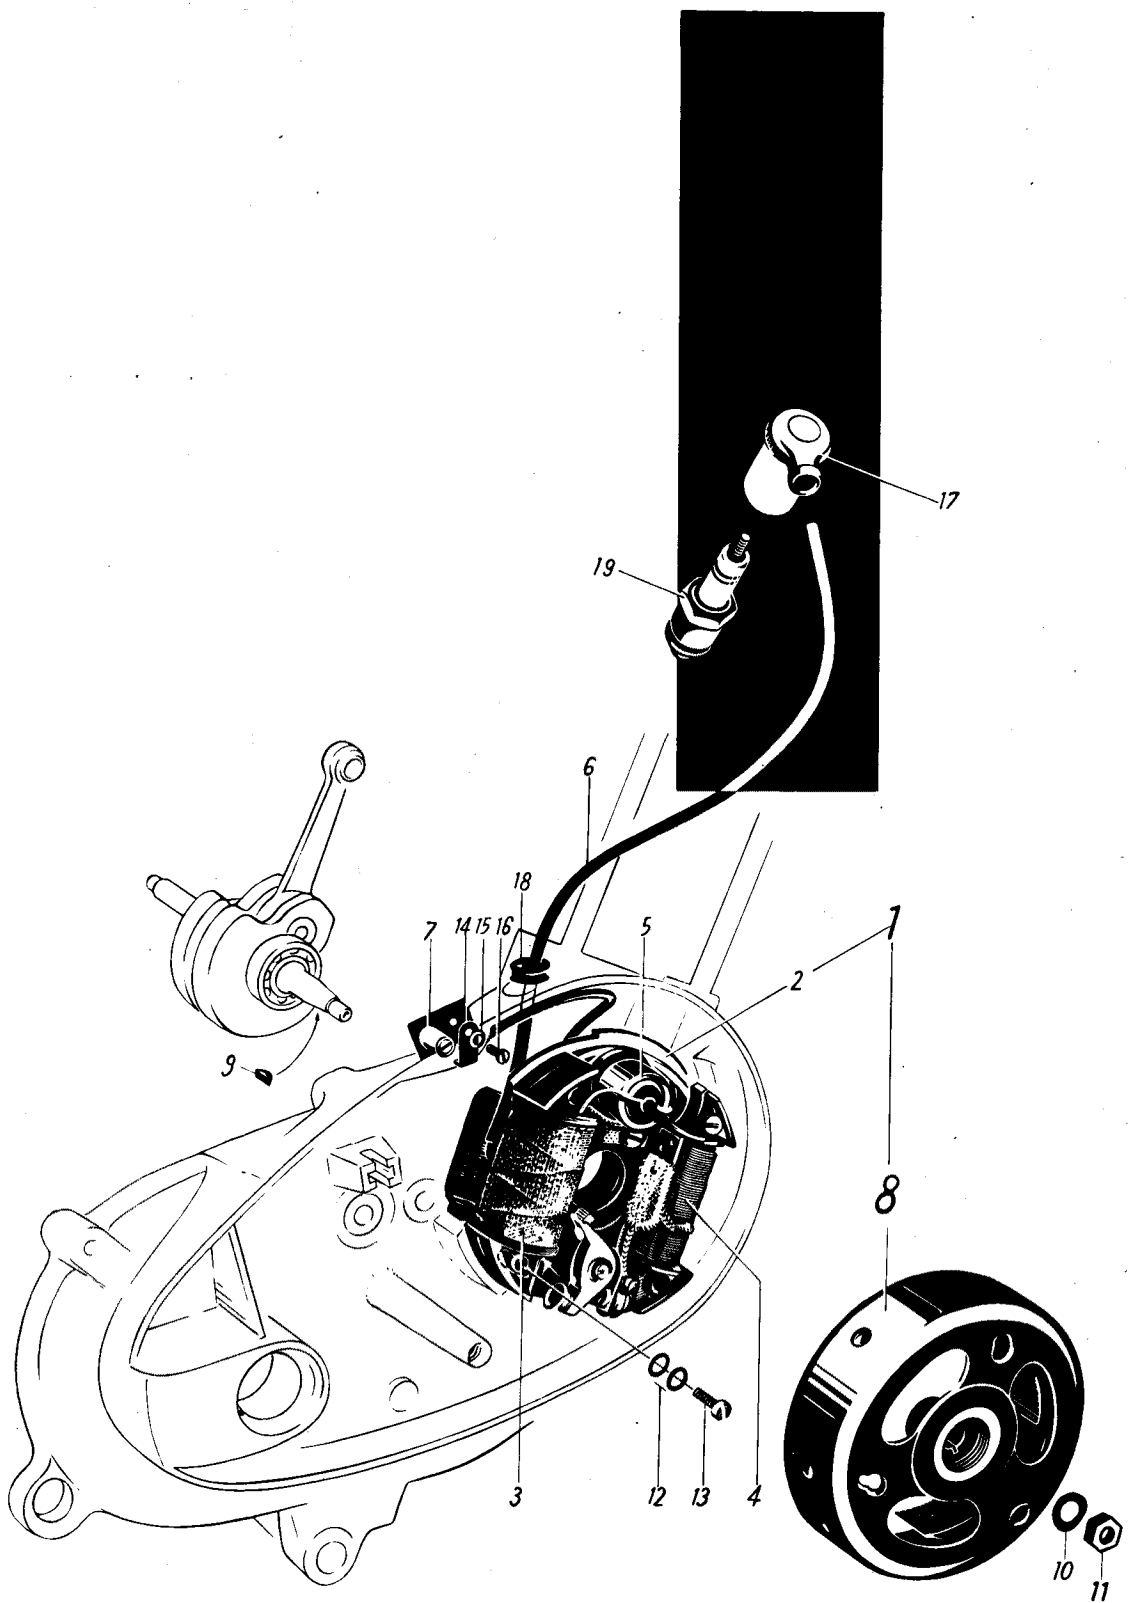

Description	Order-No.	Quantity					Remarks	Illustr.-No.
QUICKLY								
		3 Gears						
1 2 3		N-S	L	Cav.	T	TT		
					s. page 15			
Contact breaker lever	16 17 00 927	1	1	1		1		—
Circlip	11 17 10 993	1	1	1		1		—
Bolt	M 3x9 DIN 933	1	1	1		1		—
Washer	11 17 10 912	1	1	1		1		—
Insulating washer, large	11 17 10 996	2	2	2		2	12 mm diam	—
Insulating washer, small	11 17 10 923	1	1	1		1	6 mm diam	—
Washer	11 17 10 997	1	1	1		1		—
Spring ring	B 3 DIN 127	1	1	1		1		—
Nut	M 3 DIN 934	1	1	1		1		—
Contact-breaker-to condenser lead	16 17 10 910	1	1	1		1		—
H. T. Lead	16 17 00 900	1	1	1			L = 290 mm, 5 diam → 155 053 / 165 433	—
H. T. Lead	16 17 01 900	1	1	1		1	L = 290 mm, 7 diam 155 054 / 165 434 →	6
Terminal plate	16 17 10 911	1	1	1		1		7
H. T. Lead	16 17 10 901	1	1	1		1	L = 175 mm	—
Terminal screw	16 17 10 912	1	1	1		1		—
Flywheel	16 17 10 913	1	1	1			321 394 / 338 767 → → 542 388 / 588 147	8
Flywheel	16 17 12 913	1	1	1		1	542 389 / 588 148 →	—
Rubber sleeve	11 81 00 864					1		—
Fixing parts for generators								
Woodruff key	2x3,7 DIN 6888	1	1	1		1	for Flywheel	9
Spring washer	A 8 DIN 137	1	1	1		1		10
Nut	M 8x1 DIN 934	1	1	1		1		11
Spring washer	B 4 DIN 137	4	4	4		4	for Base plate	12
Screw	AM 4x15 DIN 84	2	2	2		2		13
Clip	16 17 00 004	1	1	1		1		14
Spring washer	A 4 DIN 137	1	1	1		1	for Terminal plate	15
Screw	AM 4x10 DIN 84	1	1	1		1		16
Terminal cap	011 109 070	1	1	1				→ 753 142 / 822 514
Terminal cap	16 17 00 507	1	1	1		1	{ 753 143 / 822 515 → also for vehicles prior to above no, optional s. page 16, Illustr.-No. 23	—
Rubber sleeve	16 17 00 002	1	1	1				5 mm hole diam → 155 053 / 165 433
Rubber sleeve	35 17 00 002	1	1	1		1	7 mm hole diam 155 054 / 165 434 →	18
Spark plug	11 17 00 068	1	1	1		1	W 190 M 11 S	19


Group 19
Air cooling


NSU-Quickly (3 gears Engine)

Description	Order-No.	Quantity	Remarks	Illustr.-No
-------------	-----------	----------	---------	-------------

QUICKLY


		3 Gears			
		N-S	L	Cav.	T
Spirally wound casing	29 19 00 008				1
Spring washer	A 6 DIN 137				2
Screw	AM 6x18 DIN 85				3
Screw	BM 6x38 DIN 85				4
Fan cowling	29 19 00 502				5
Air ducting, left	29 19 00 001				6
Air ducting, right	29 19 00 002				7
Spring washer	A 5 DIN 137				8
Screw	AM 5x15 DIN 85				9
Screw	AM 5x10 DIN 85				10
Screw	AM 4x6 DIN 85				11
Spring washer	A 4 DIN 137				12
Nut	M 4 DIN 934				13

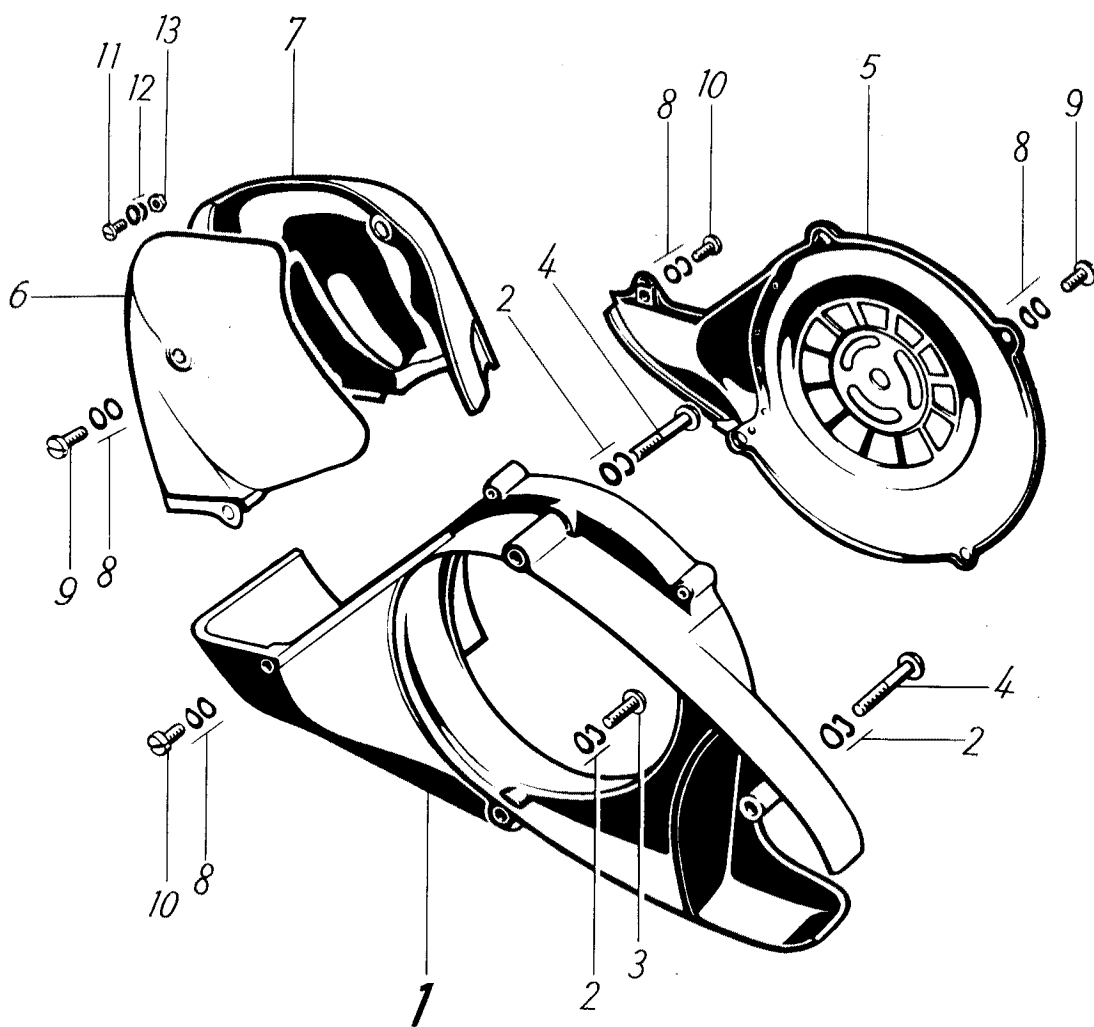


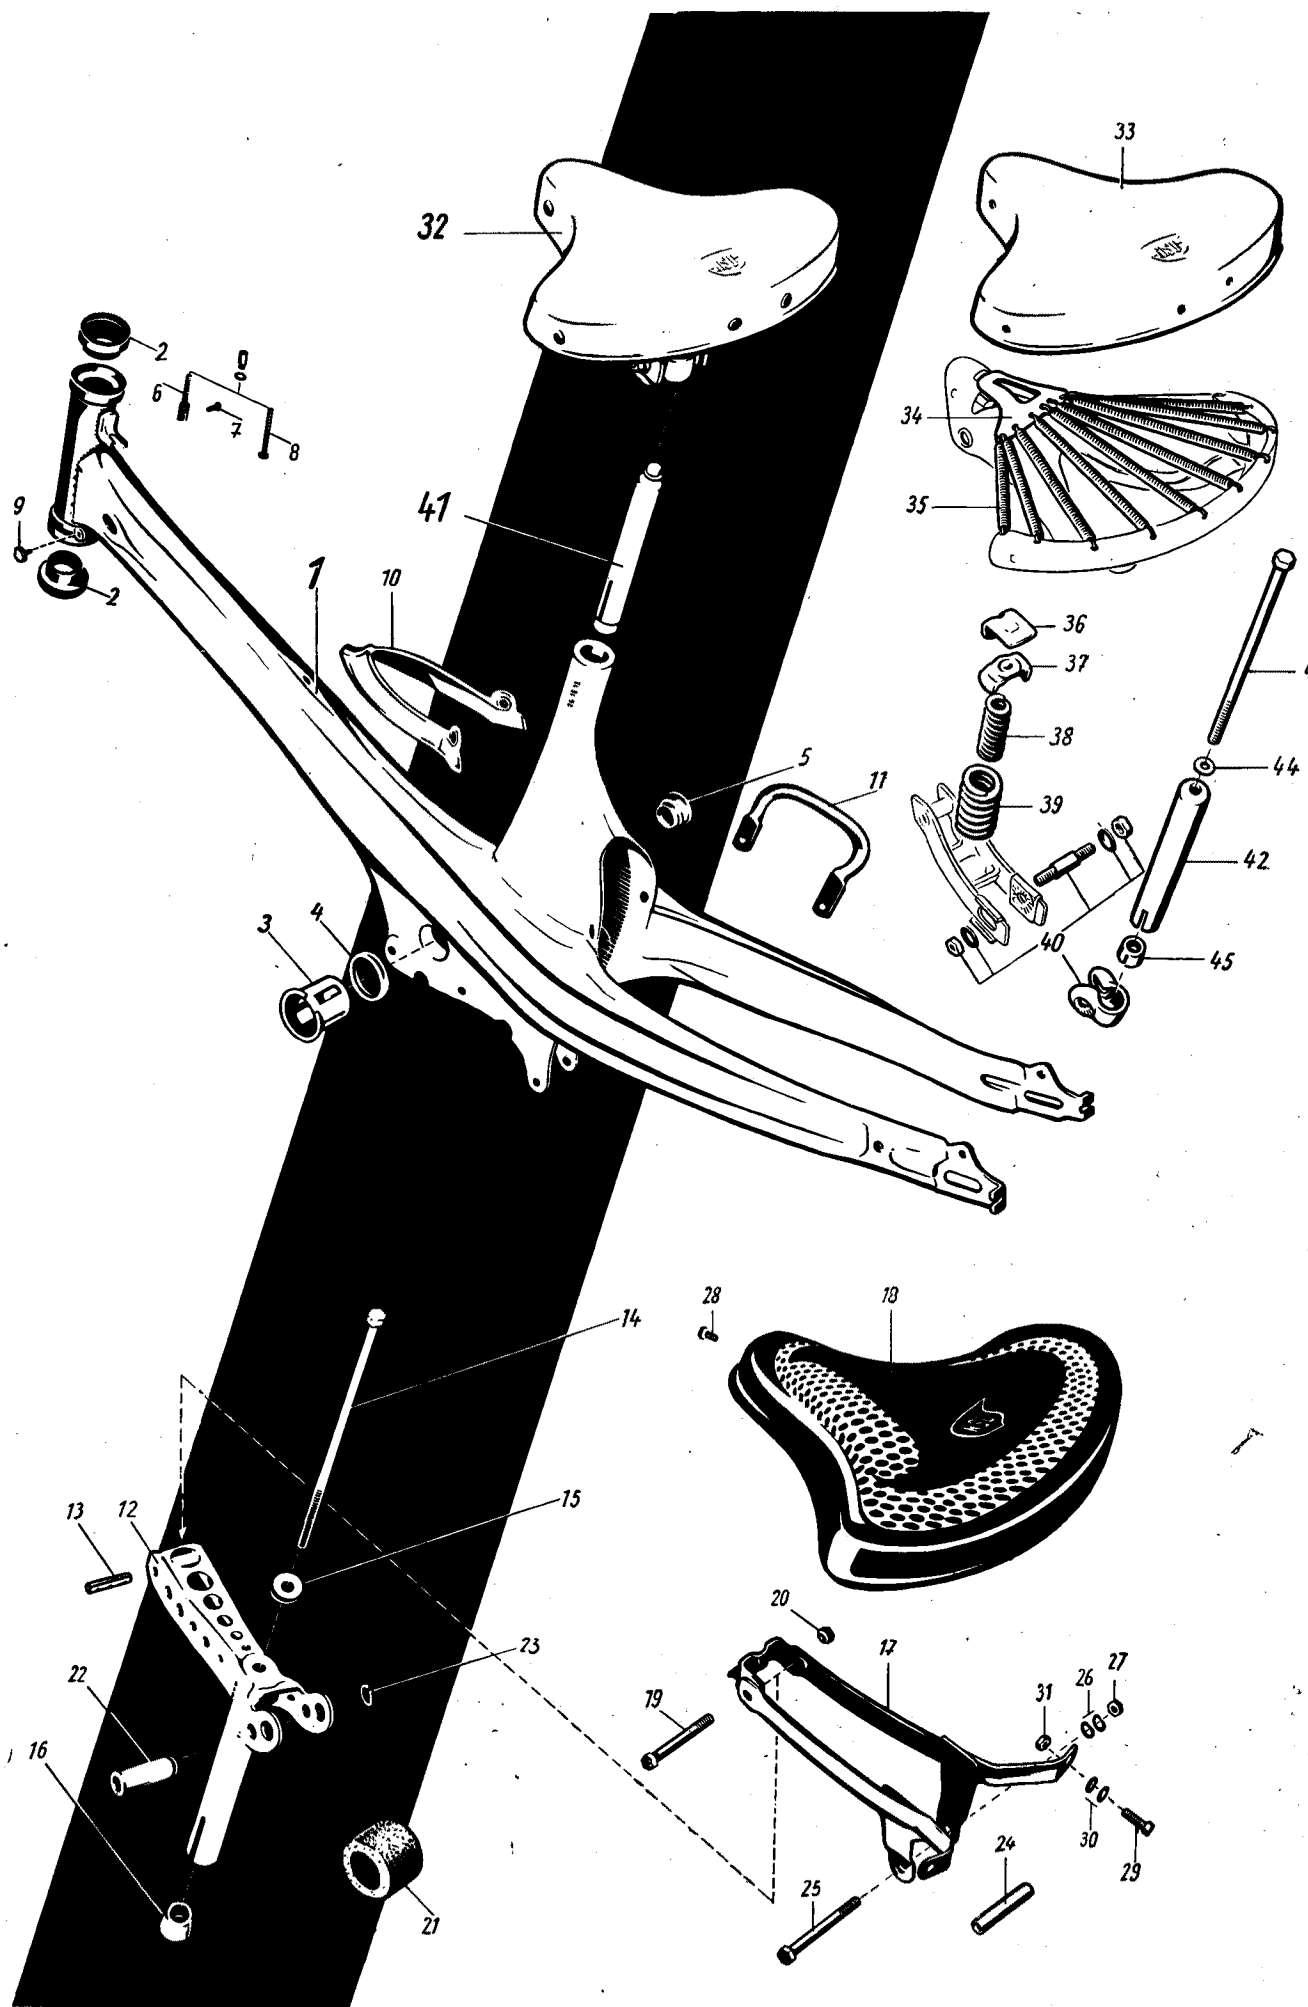

Description	Order-No.	Quantity	Remarks	Illustr.-No.
1 2 QUICKLY N-S				
Frame	16 31 02 501	1	→ 482 754 / 522 989	1
Frame	16 31 00 901	1	482 755 / 522 990 →	—
Steering head race	023 103 927	each 1		2
Nameplate	16 31 00 900	1	{ not supplied without stamped number	—
Grooved stud	2x3 DIN 1476	2		—
Filter body	16 31 00 019	1		3
Seal ring	16 31 00 070	1	→ 451 958 / 701 432	4
Socket	16 31 00 020	1		5
Forked pin	16 31 00 023	1	{ → 360 029 / 380 172	6
Rivet	16 31 00 030	1	{ 5x13 DIN 74268	7
Bolt	—	—	{ 360 030 / 380 173 → s. page 53, Illustr.-No. 17	8
Rubber plug	16 31 00 038	2	211 751 / 226 947 →	9
Cover	16 31 00 510	1		10
Handle	16 93 02 007	1		11
Bolts for handle	—	—	s. page 1, Illustr.-No. 2	—
Rubber sleeve for cable	—	—	s. page 43, Illustr.-No. 16, 18, 20	—
Saddle	16 38 00 501	1	{ not supplied, order saddle 16 38 01 501 and seat tube compl. 16 38 00 901.	—
Saddle support	16 38 00 900	1		12
Bush	16 38 00 016	1		13
Clamp bolt	534 080 054	1		14
Washer	534 080 396	1		15
Nut	534 080 055	1	→ 97 844 / 104 888	16
Sattle frame	16 38 01 504	1		17
Cover	16 38 00 502	1	{ remove nose in vehicles from 56 078 / 59 694 to 97 844 / 104 888	18
Bolt	16 38 00 003	1		19
Nut	16 38 00 004	1		20





Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
Rubber ring	16 38 00 001	1	→ 97 844 / 104 888	21
Sleeve	16 38 00 002	1		22
Circlip	14x1 DIN 471	1		23
Spacer	16 38 00 017	1		24
Bolt	M 7x62 DIN 931	1		25
Spring washer	A 7 DIN 137	2		26
Nut	M 7 DIN 934	1		27
Screw	M 7x15 DIN 933	1		28
Screw	M 7x18 DIN 933	2		29
Spring washer	A 7 DIN 137	4		30
Nut	M 7 DIN 934	2		31
Saddle	16 38 01 501	1	not supplied saddle 16 38 02 501 should be ordered with this part	32
Saddle top	16 38 00 913	1		—
Bracket	16 38 00 914	1	97 845 / 104 889 →	—
Cover	16 38 00 905	1		33
Spring holder plate	16 38 00 912	1		34
Set of Spring	16 38 00 908	1		35
Saddle rivet (large headed)	16 38 00 909	2		—
Saddle rivet (small headed)	16 38 00 910	4		—
Guide	16 38 00 906	1		36
Support	16 38 00 915	1		—
Pivot	16 38 00 916	1		—
Adjuster w/washers	16 38 00 907	1		—
Spring seat	16 38 00 911	1		37
Saddle spring, inner	16 38 00 903	1		38
Saddle spring, outer	16 38 00 902	1		39
Clip compl.	16 38 00 904	1		40
Seat tube compl.	16 38 00 901	1	not supplied	41
Seat tube	16 38 01 019	1		42
Clamp bolt	534 080 054	1		43
Washer	8,4 DIN 125	1		44
Nut	534 080 055	1		45

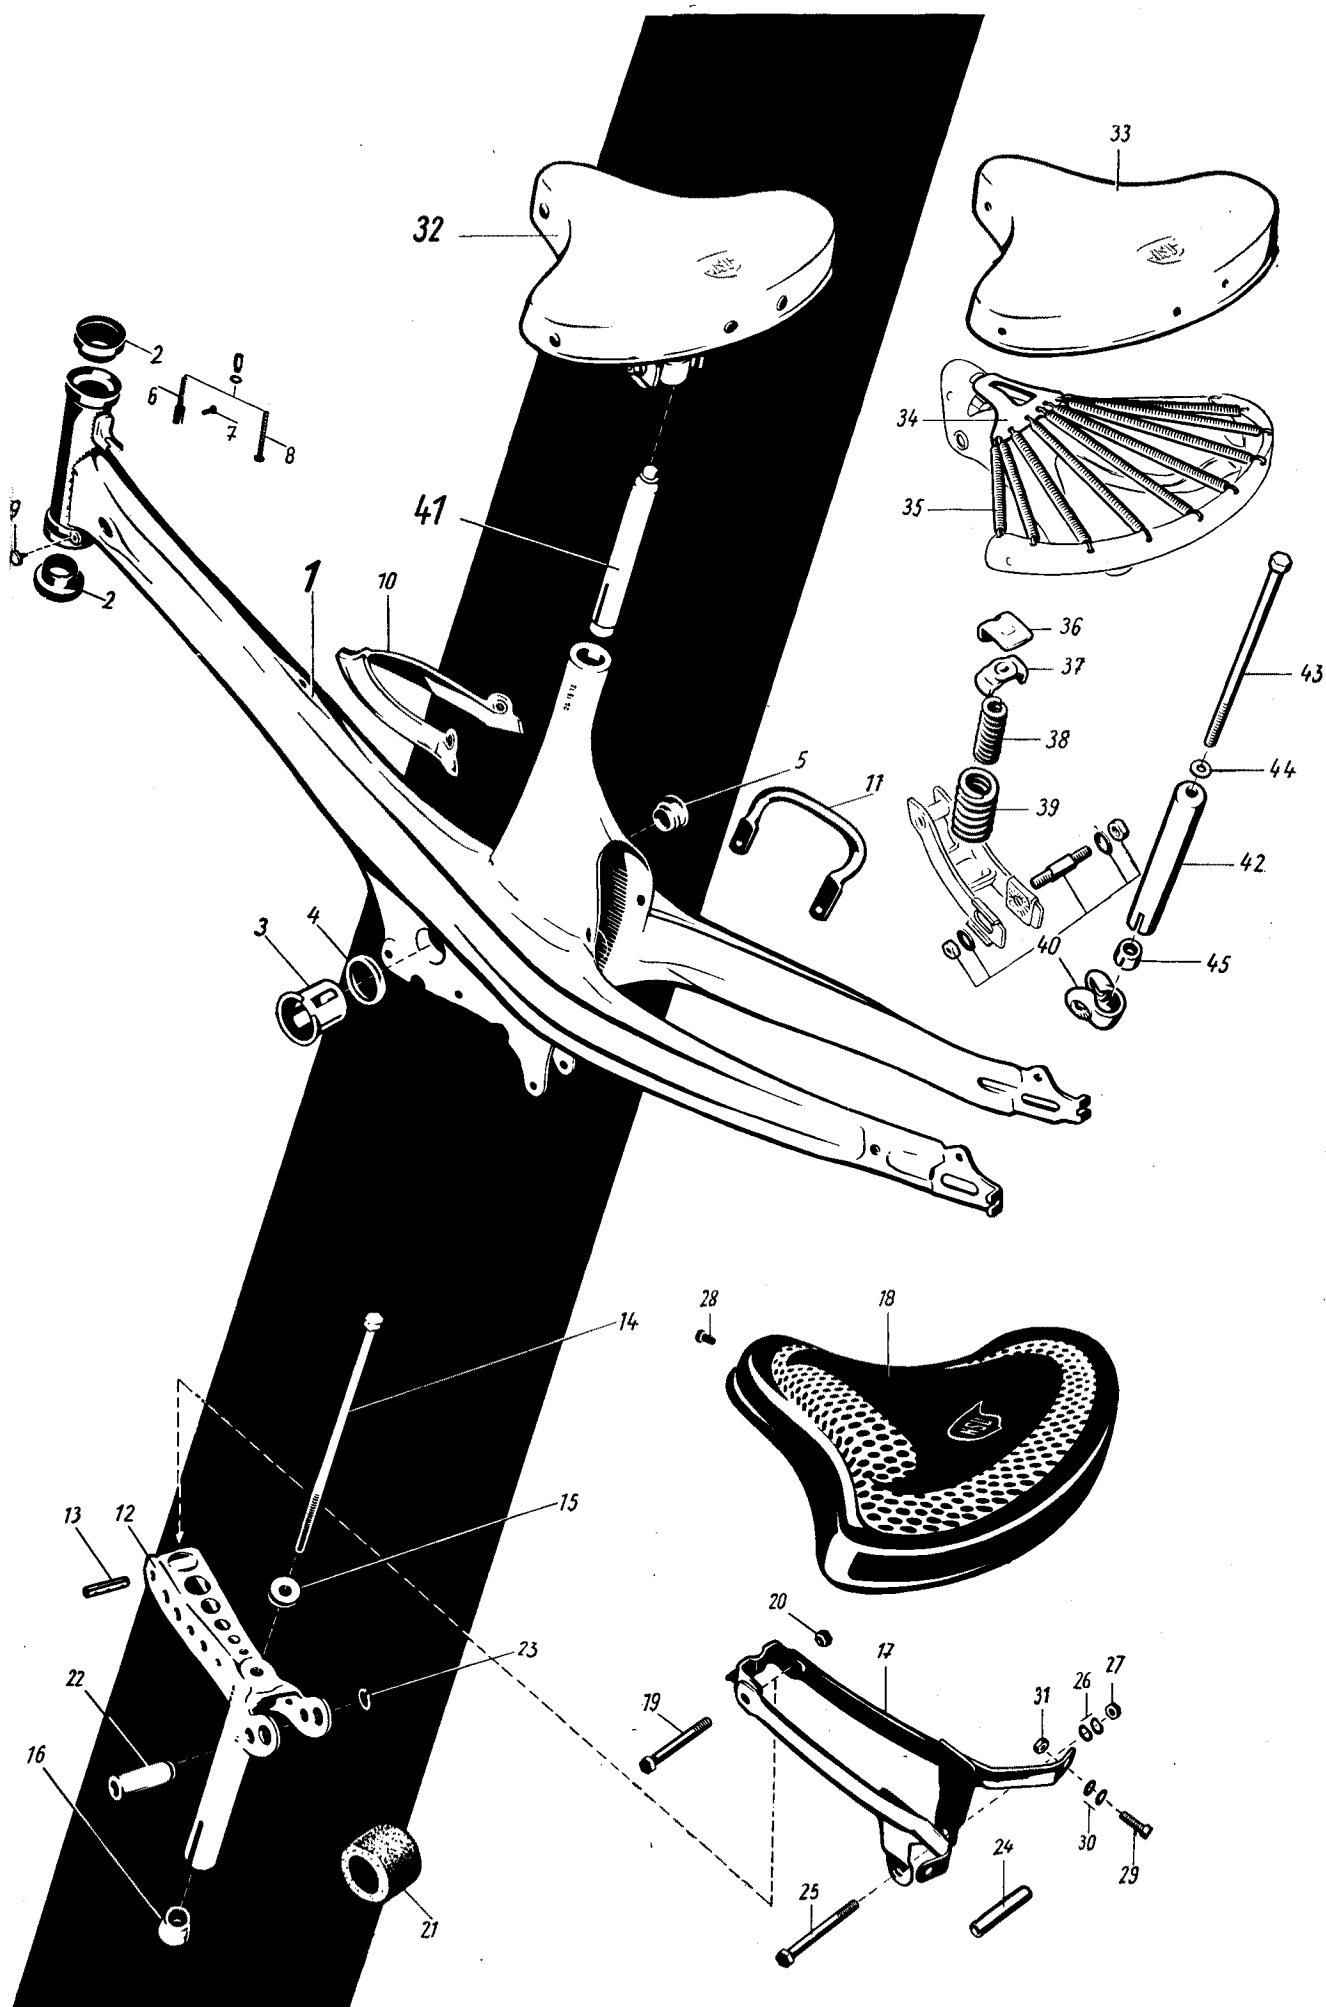


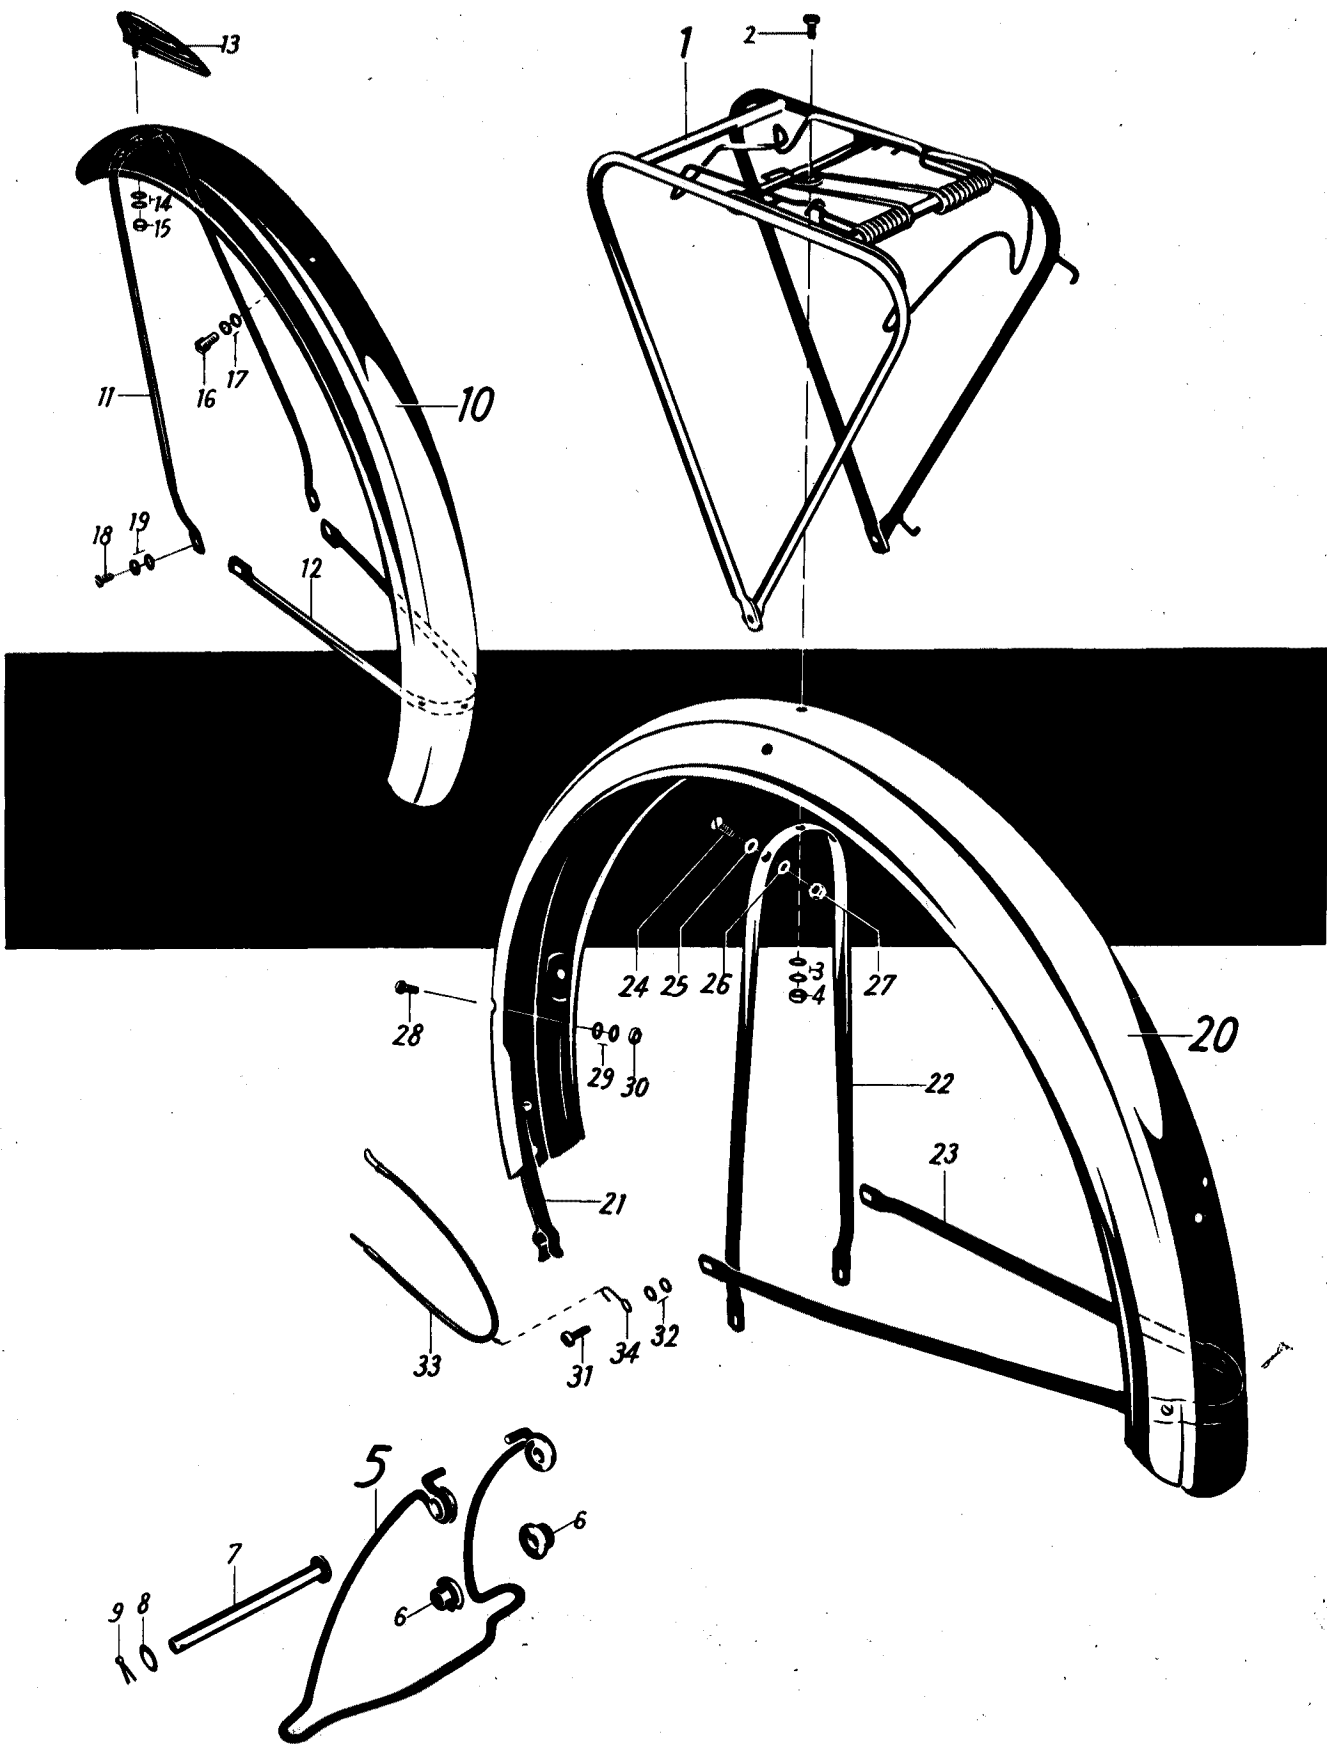

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
N-S				
	1 2 3 4			
Luggage carrier	↓ 16 93 00 501	1	→ 208 884 / 225 051	—
Luggage carrier	— 16 93 01 501	1	208 885 / 225 052 →	1
Yoke	↓ 16 93 00 016	1		—
Yoke	↓ 16 93 00 907	1		—
Bolt	M 6x12 DIN 933	1		2
Spring washer	B 6 DIN 137	2		3
Nut	M 6 DIN 934	1		4
Lock w/key	16 93 00 004	1	→ 208 884 / 225 051	—
Stand	↓ 16 35 00 503	1		5
Bush	↓ 16 35 00 013	2		6
Tube	16 35 01 504	1		7
Washer	16 35 00 010	2	} → 58 200 / 61 835	—
Split pin	3x18 DIN 94	2		—
Washer	16 35 00 010	2	} 58 201 / 61 836 →	8
Split pin	3x18 DIN 94	1		9
Front mudguard	16 33 00 504	1	for Quickly-N	10
Front mudguard	16 33 02 504	1	for Quickly-S	—
Front mudguard	16 33 01 505	1	} for Quickly-N for Eire	—
Front mudguard	16 33 02 505	1		—
Stay, front	16 33 00 502	1	} for fixing of the struts on the mudguard	11
Stay, front	16 33 00 503	1		12
Bolt	M 4x8 DIN 85	4		—
Washer	4,3 DIN 125	4		—
Spring ring	B 4 DIN 127	4		—
Nut	M 4 DIN 934	4		—
NSU emblem	533 085 385	1		13
Spring washer	A 4 DIN 137	2		14
Nut	M 4 DIN 934	1		15
Bolt	M 6x15 DIN 933	1	→ 109 741 / 117 525	—
Bolt	M 6x12 DIN 933	1	109 742 / 117 526 →	16
Spring washer	A 6 DIN 137	2		17
Nut	M 6 DIN 934	1	→ 109 741 / 117 525	—
Bolt	M 6x8 DIN 933	2		18
Spring washer	A 6 DIN 137	4		19
Numberplate, front	16 33 00 010	1		—
Bolt	M 5x10 DIN 85	1		—
Spring washer	A 5 DIN 137	2		—
Nut	M 5 DIN 934	1		—
Rear mudguard	↓ 16 34 00 509	1	} Quickly N with 2 holes on mudguard end	—
Rear mudguard	— 16 34 01 509	1		—
Rear mudguard	— 16 34 00 510	1	} Quickly N for Eire	—
Rear mudguard	— 16 34 01 510	1		—
Spring	↓ 16 34 00 508	1	} Quickly S } with 4 holes on mudguard end	21
Rivet	↓ 3,5x8 DIN 660	1		—
Medal	16 34 00 021	1		—
Distanc rubber	16 41 00 087	2		—
Stay, top	16 34 00 503	1		22
Stay, bottom	16 34 00 504	1		23

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
Bolt	M 4x8 DIN 85	2		24
Washer	4,3 DIN 125	2		25
Spring ring	B 4 DIN 127	2		26
Nut	M 4 DIN 934	2		27
Bolt	M 6x16 DIN 933	2		28
Spring washer	B 6 DIN 137	4		29
Nut	M 6 DIN 934	2		30
Bolt	M 6x22 DIN 931	2		31
Spring washer	B 6 DIN 137	4		32
Dress guard cord	16 34 00 505	4	} for Quickly-N	33
Hook	16 34 00 011	2		34
Numberplate, rear	16 34 00 019	1		—
Bracket	16 34 00 020	1		—
Bolt	M 5x12 DIN 85	1		—
Bolt	M 5x10 DIN 85	2		—
Spring washer	A 5 DIN 137	6		—
Nut	M 5 DIN 934	3		—

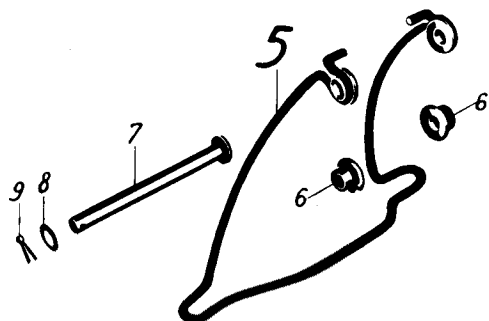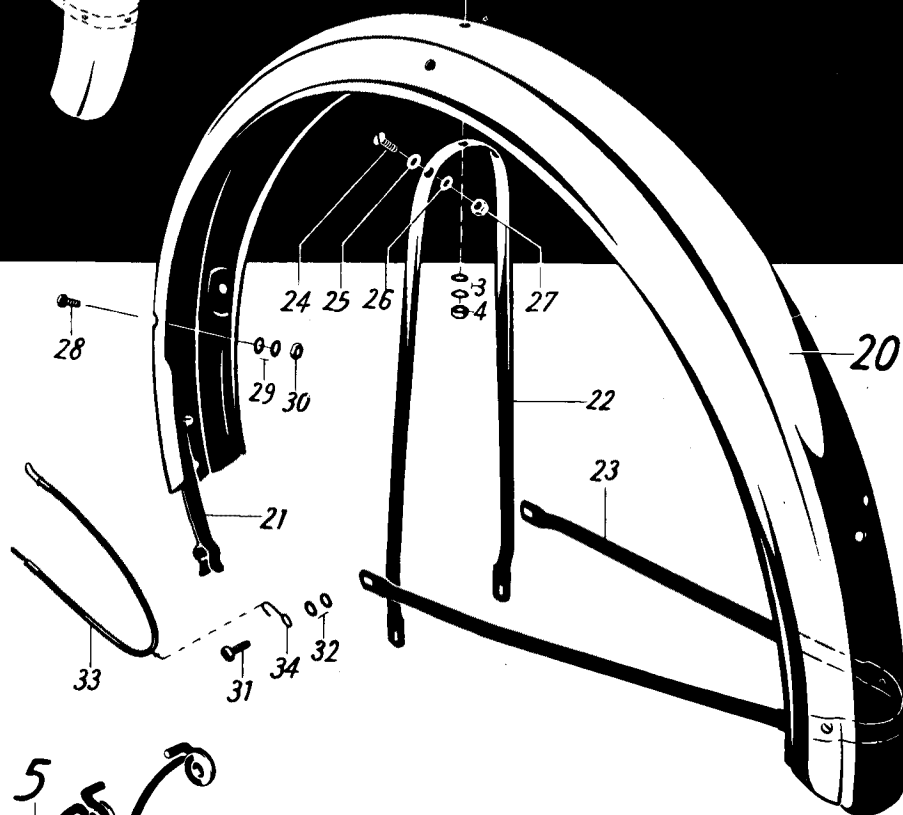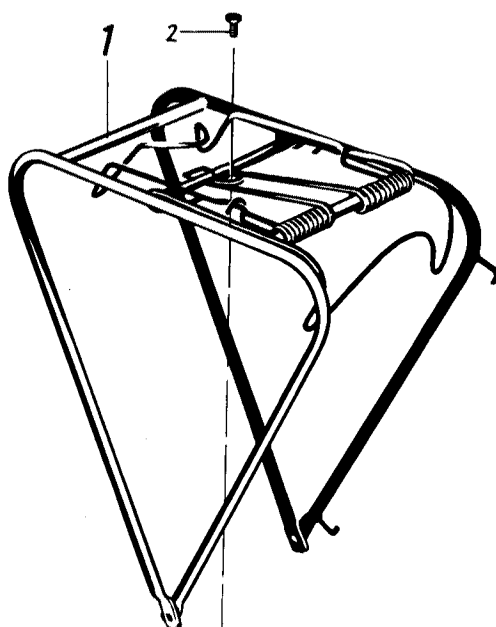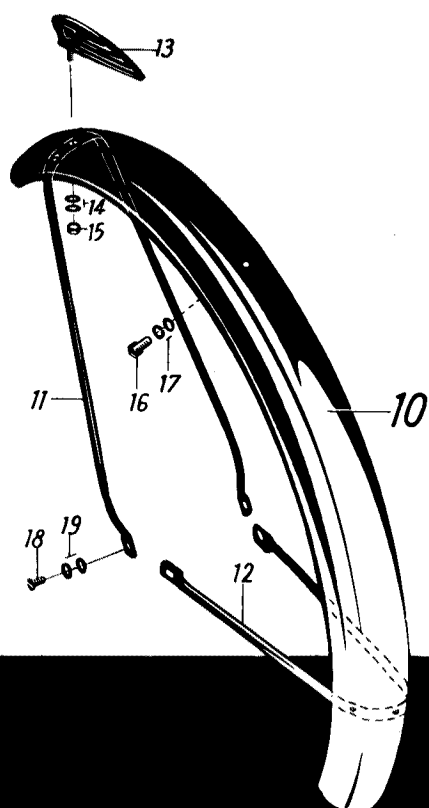

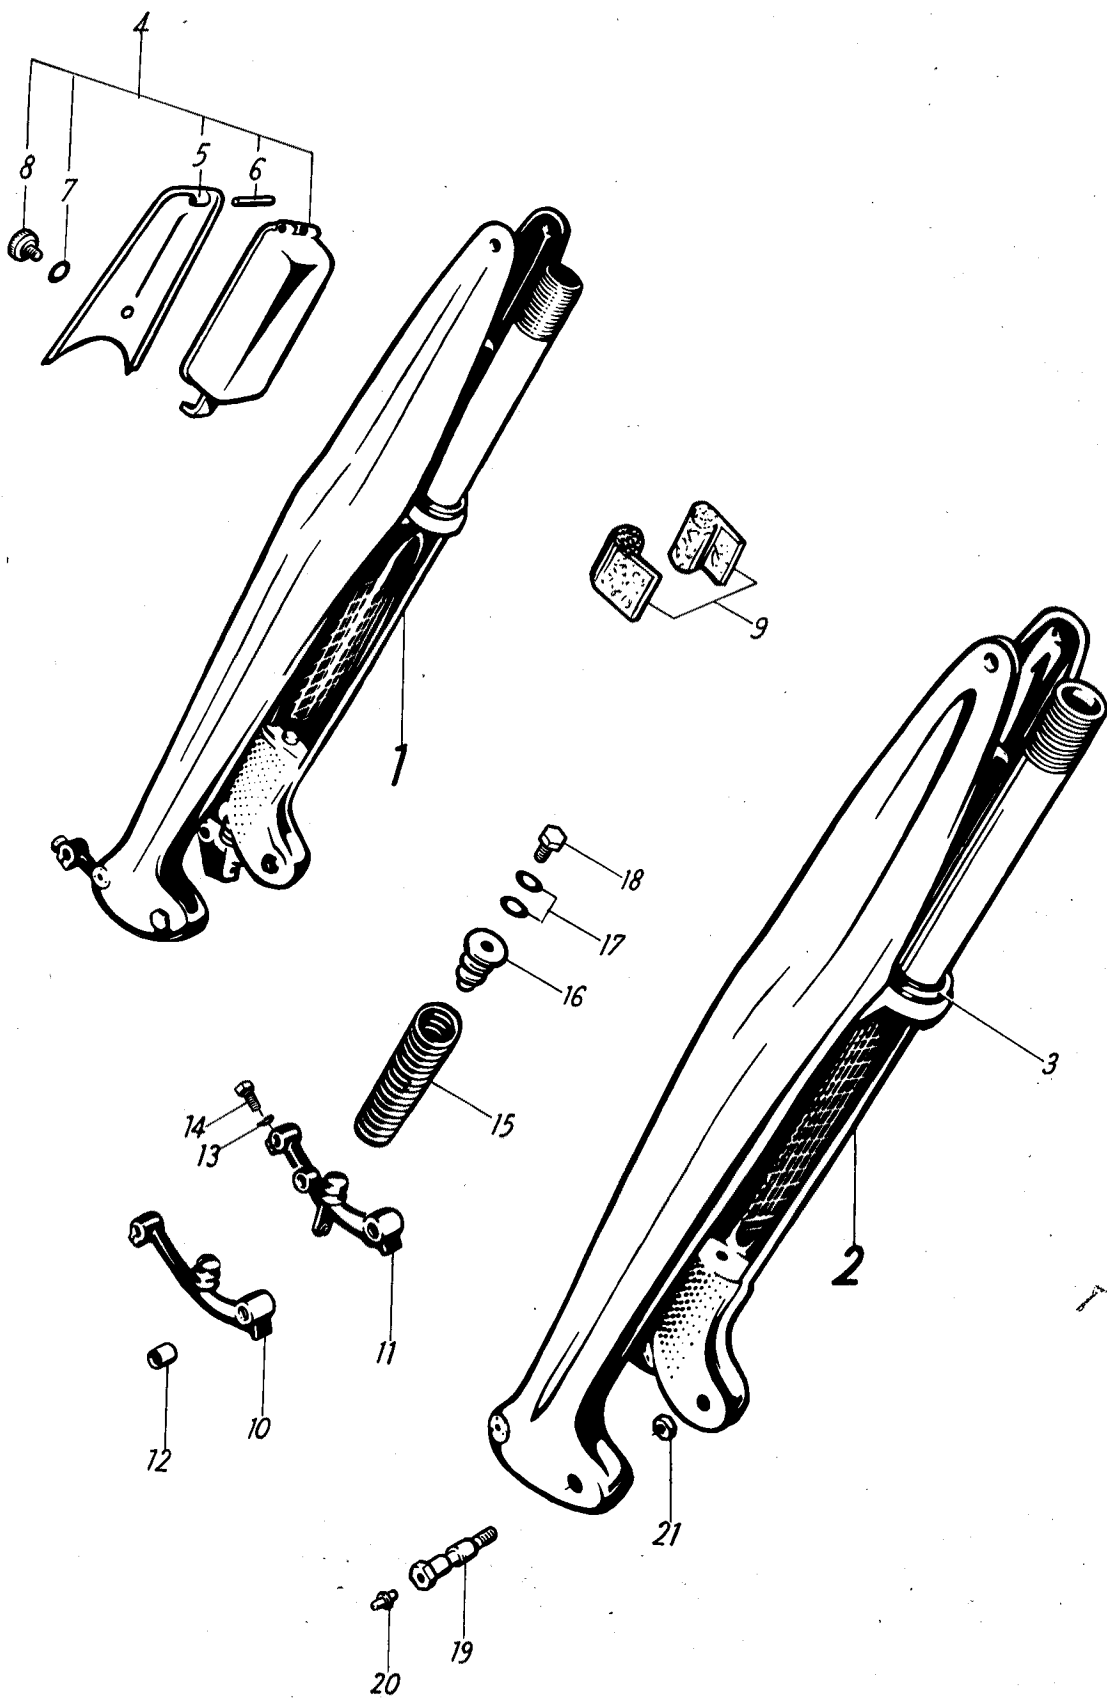


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
N - S				
	1 2 3			
Spring fork, compl.	16 41 00 900	1	→ 109 741 / 117 525;	1
Spring fork with bottom cone	16 41 00 901	1	not supplied, order 16 41 02 900 and cover 16 73 02 900	2
Bush	16 41 00 401	2	8x11x4,5 mm for conversion see note under 16 41 00 509/508	—
Cone, bottom	044 412 131	1		3
Tool box	16 73 00 501	1		4
Cover	16 73 00 900	1		5
Tommy bar	2,5 h 11x32 DIN 7	1	→ 109 741 / 117 525	6
Spring ring	A 5 DIN 127	1		7
Knurled screw	16 73 00 004	1		8
Rubber strip	043 411 209	2		9
Swinging link, left	16 41 00 509	1	→ 109 741 / 117 525 not supplied, for that order Swinging link 16 41 01 509 or 16 41 01 508 and Bush 16 41 00 055, Bolt 16 41 00 054, Cap 16 41 00 053 and 2 Bushes 16 41 00 401	10
Swinging link, right	16 41 00 508	1		11
Bush	16 41 00 041	each 2	11x13x19,7 mm	12
Spring washer	A 8 DIN 137	2		13
Screw	16 41 00 045	2		14
Spring	16 41 00 010	2		15
Spring (reinforced)	16 41 01 010	2	optional	—
Rubber plug	16 41 00 088	2	→ 109 741 / 117 523	—
Retainer	16 41 00 012	2		16
Spring washer	A 7 DIN 137	4		17
Screw	M 7x15 DIN 933	2		18
Pin for swinging link	16 41 00 902	2	11 mm ∅	19
Grease nipple	D 6 DIN 3402	2		20
Nut	16 41 00 050	2		21


Mounting parts see sheet 39

Group 41
Spring fork

NSU-Quickly (N-S)


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
	1 2 3 4			
Spring fork less cover	16 41 02 900	1	109 742 / 117 526 → → 482 754 / 522 989; in earlier vehicles than 109 742 / 117 526 cover for tool box 16 73 02 900 should be ordered with this part.	—
Spring fork less cover	16 41 02 901	1		—
Spring fork less cover	16 41 03 900	1	482 755 / 522 990 →	1
Spring fork less cover	16 41 03 901	1		2
Cone, bottom	044 412 131	1		3
Cover for toolbox	16 73 00 901	1	109 742 / 117 526 → → 281 717 / 299 049	—
Cover for toolbox	16 73 01 901	1	281 718 / 299 050 →	4
Rubber strip	16 73 00 007	1		5
Spring washer	A 5 DIN 137	1		6
Knurled screw	16 73 00 004	1		7
Escutcheon	16 41 00 064	1		8
Spring washer	A 3 DIN 137	1	208 685 / 225 052 →	9
Rivet	3x6 DIN 660	1		10
Nameplate	16 41 00 083	1		11
Rubber, spacer	16 41 00 087	1	281 718 / 299 050 →	12
Safety lock with key	16 41 00 513	1	208 685 / 225 052 →	—
Swinging link, left	16 41 01 509	1		13
Swinging link, right	16 41 01 508	1		14
Bush	16 41 00 056	each 2		15
Crease nipple	D 6 DIN 3402	each 1		16
Cap	16 41 00 053	4		17
Spring	16 41 00 010	2	109 742 / 117 526 → → 482 754 / 522 989	18
Spring (reinforced)	16 41 01 010	2	{ optional	—
Rubber plug	16 41 00 088	2		19
Retainer, top	16 41 00 012	2		20
Spring washer	A 7 DIN 137	4		21
Screw	M 7x15 DIN 933	2		22
Swinging link	16 41 02 508	each 1		23
Bush	16 41 01 056	each 2	482 755 / 522 990 →	24
Cab, inner	16 41 00 081	each 2		25
Grease nipple	D 6 DIN 3402	each 1		26
Cab, outer	16 41 00 080	each 2		27
Spring washer	A 8 DIN 137	2		28
Bolt	16 41 00 045	2		29

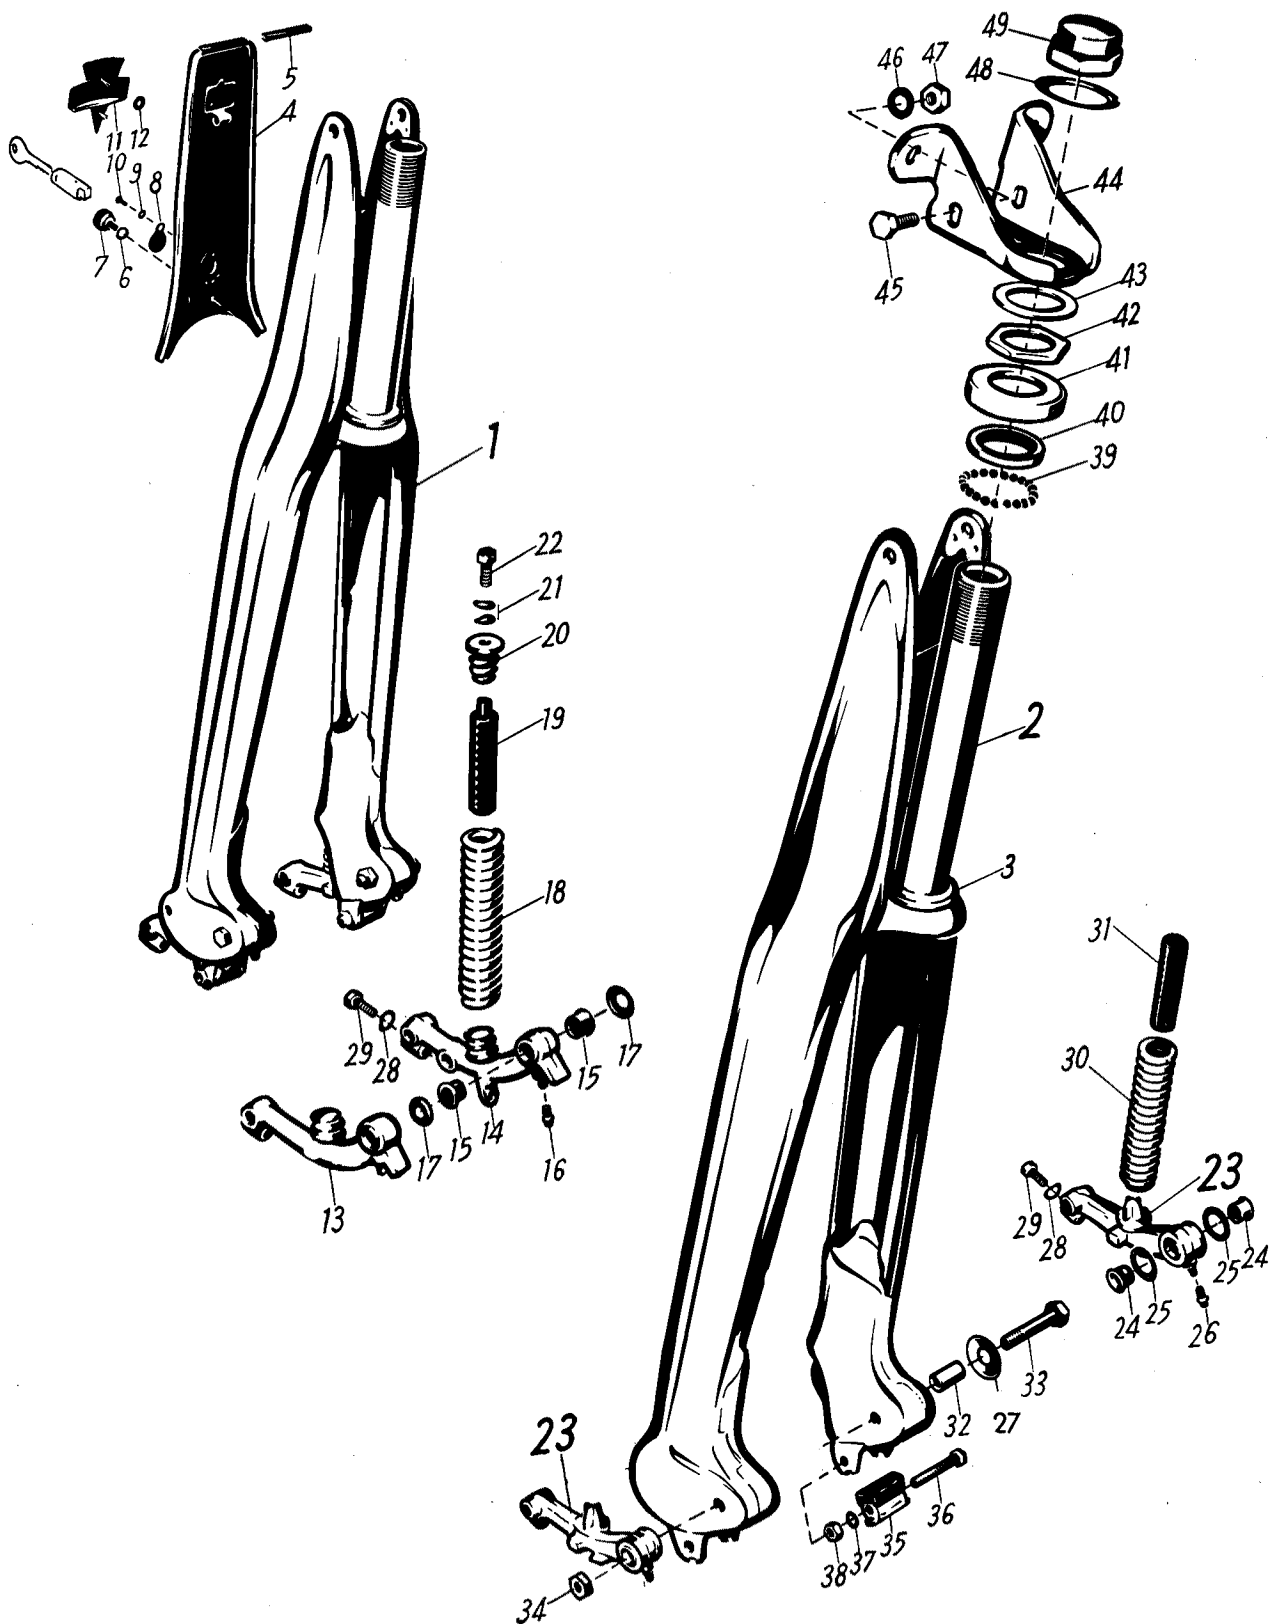


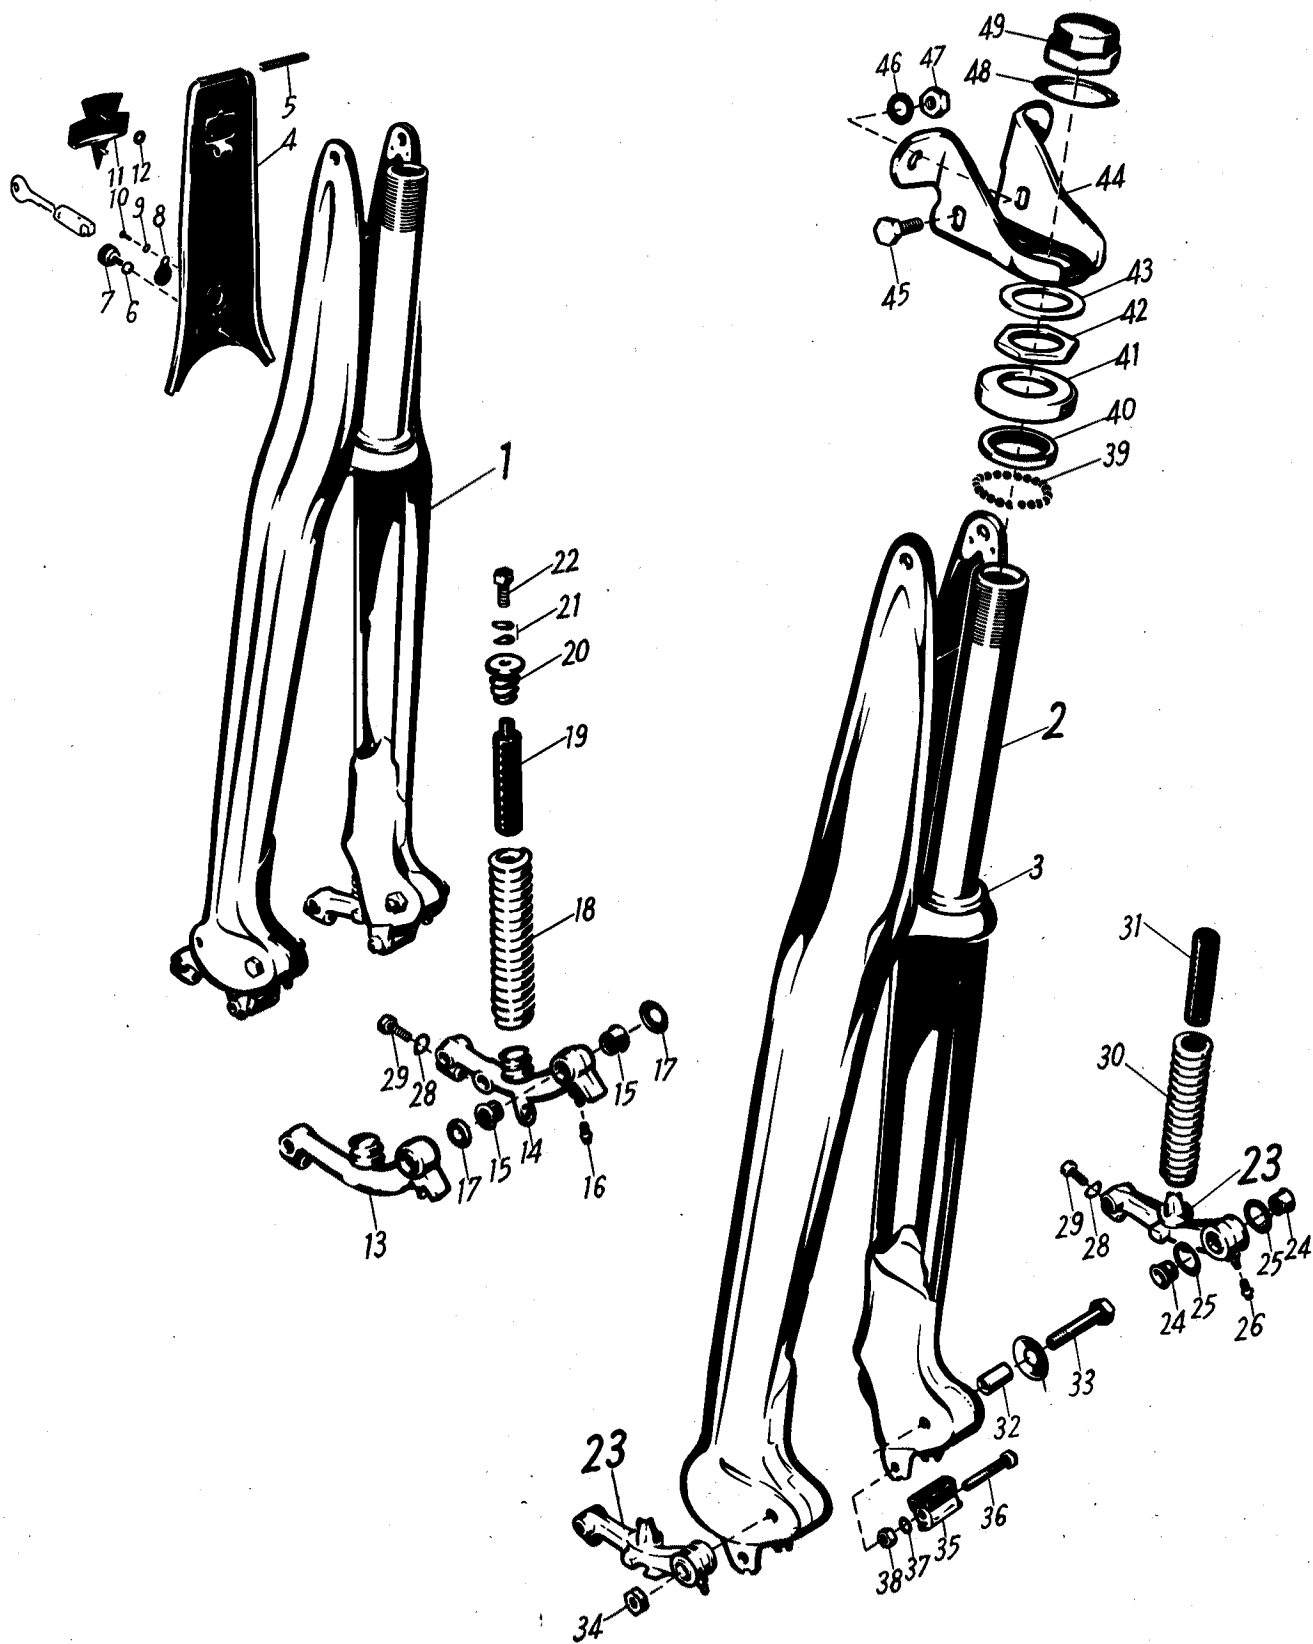

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
1 2				
Spring (round material)	16 41 03 010	2	482 755 / 522 990 →	30
Spring (square material)	16 41 04 010	2		—
Rubber plug	16 41 01 088	2	8x12x19 mm 109 742 / 117 526 → 8 mm diam	31
Bush	16 41 00 055	2		32
Bolt	16 41 00 054	2		33
Nut	16 41 00 050	2	482 755 / 522 990 →	34
Stop	16 41 00 515	2		35
Bolt	M 6x36 DIN 931	2		36
Lock washer	A 6,4 DIN 6798	2		37
Nut	M 6 DIN 934	2		38
Parts for steering head bearing				
Ball	024 049 962	each 21	5 mm diam	39
Cone	024 103 928	1		40
Cover	024 103 929	1		41
Nut	074 742 006	1		42
Washer	16 41 00 086	1	281 718 / 299 050 →	43
Handlebar support	16 41 02 046	1	in earlier vehicles than 80 700 / 86 472 2 Bolts 8x50 DIN 931 and 4 Spacers 16 93 00 401, in vehicles from 174 235 / 187 152 to 252 704 / 270 685 2 Bolts 8x18 DIN 931, 2 Lock washers A 8,4 DIN 6798 and 2 Nuts M 8 DIN 934 should be ordered with this part; state colour	44
Bolt	M 8x18 DIN 933	2	→ 174 234 / 187 151 252 705 / 270 686 →	45
Lock washer	A 8,4 DIN 6798	2		46
Nut	M 8 DIN 934	2		47
Bolt	M 8x66 DIN 931	1	174 235 / 187 152 → → 252 704 / 270 685	—
Lock washer	A 8,4 DIN 6798	1		—
Nut	M 8 DIN 934	1		—
Lock plate	16 41 00 051	1		48
Cap nut	024 103 441	1		49
Cap nut	16 41 01 048	1	only for vehicles with speedometer on cap nut → 281 717 / 299 049	—

40

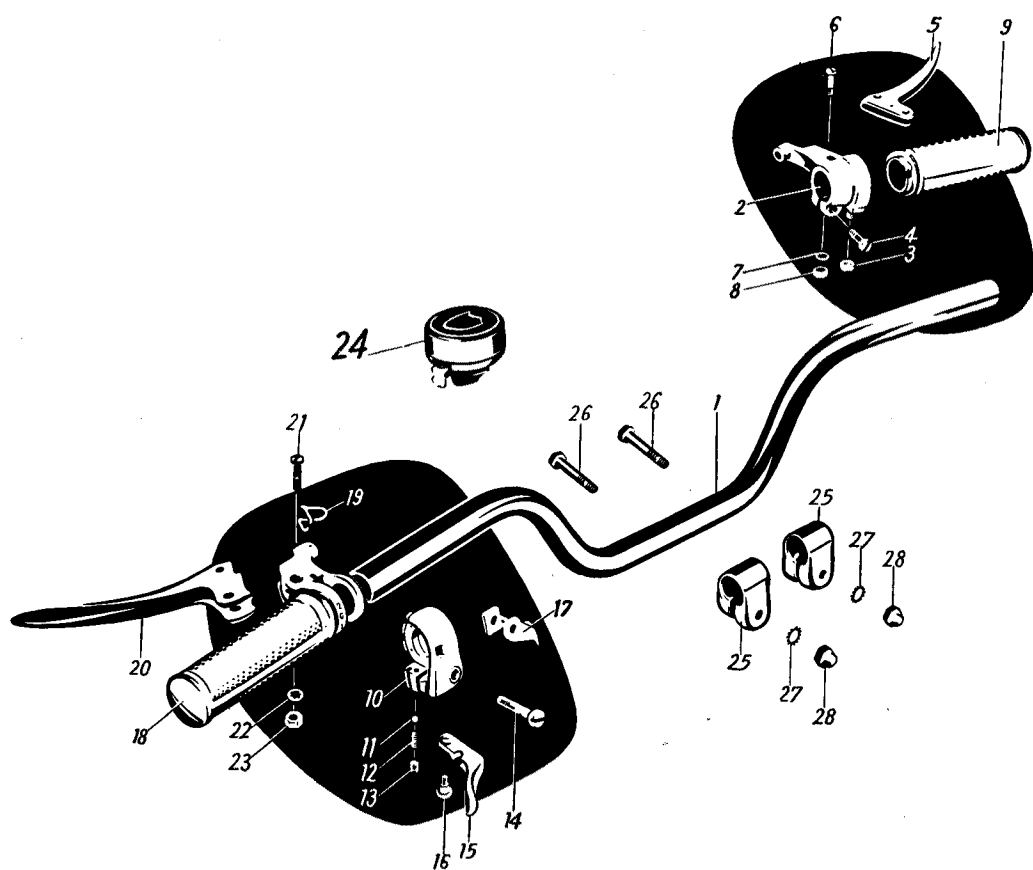

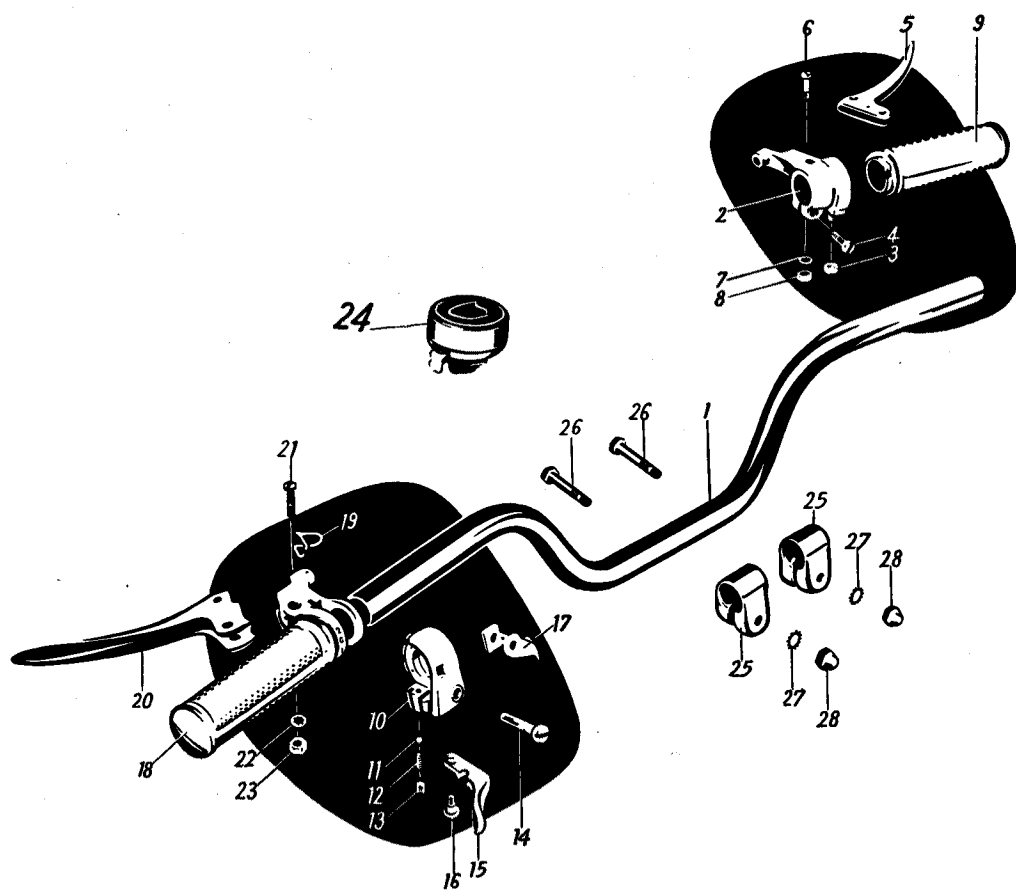



Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
	1 2 3 4 5			
Washer	6,4 DIN 125	1		—
Screw	16 44 00 913	1		14
Decompressor lever	16 44 00 909	1		15
Screw	M 4x4 DIN 923	1		16
Spring washer	16 44 00 923	1		—
Support	16 44 00 916	1		17
Twistgrip sleeve	16 44 00 906	1	→ 268 490 / 286 207	—
Twistgrip sleeve	16 44 01 906	1	268 491 / 286 208 →	18
Rubber grip	16 44 00 904	1		—
Stirrup	16 44 00 910	1		19
Clutch lever	16 44 00 907	1		20
Bolt	16 44 00 908	1		21
Lock washer	J 5,3 DIN 6797	1		22
Nut	M 5 DIN 934	1		23
Bell	16 44 00 505	1		24
Clip	16 43 00 001	2		25
Washer	16 43 00 050	2		—
Bolt	M 8x45 DIN 931	2		26
Lock washer	A 8,4 DIN 6798	4		27
Cap nut	M 8 DIN 1587	2		28

Group 43
Handlebar

NSU-Quickly (N-S)


Description	Order-No.	Quantity	Remarks	Illustr.-No.
1 2 3 QUICKLY N-S				
Handlebar assy	16 43 06 501	1	650 097 / 701 068 → 3 gears alternatively with 2 gears. Quickly-L optional	1
Handlebar tube	16 43 01 002	1		2
Throttle twistgrip	16 43 03 502	1		—
Twistgrip housing	16 44 04 900	1		3
Adjusting screw	16 44 00 929	1	M 6	—
Nut	M 6 DIN 439	1		4
Screw	044 413 608	1		5
Lever	16 44 00 902	1		6
Bolt	16 44 00 903	1		7
Lock washer	5,3 DIN 6797	1		8
Nut	M 5 DIN 934	1		9
Twistgrip sleeve	16 44 03 901	1		10
Rubber grip	16 44 01 904	1		—
Washer	16 44 02 921	1		—
Gear change twistgrip	16 43 02 503			11
Housing	16 44 04 905	1		12
Ball	11 13 00 780	1	4 mm diam	13
Spring	16 44 00 911	1		14
Grub screw	014 106 433	1	M 5x4 mm	15
Washer	6,4 DIN 125	1		16
Screw	16 44 00 913	1		17
Decompressor, lever	16 44 00 909	1		18
Screw	M 4x4 DIN 923	1		19
Spring washer	16 44 00 923	1		—
Support	16 44 00 916	1		20
Twistgrip sleeve	16 44 04 906	1		21
Rubber grip	16 44 00 904	1		—
Stirrup	16 44 00 910	1		22
Clutch lever	16 44 02 907	1		23
Bolt	16 44 00 908	1		24
Lock washer	J 5,3 DIN 6797	1		25
Nut	M 5 DIN 934	1		26
Bell	16 44 00 505	1		27
Clip	16 43 00-001	2		28
Washer	16 43 00 050	2		—
Bolt	M 8x45 DIN 931	2		29
Lock washer	A 8,4 DIN 6798	4		30
Cap nut	M 8 DIN 1587	2		31

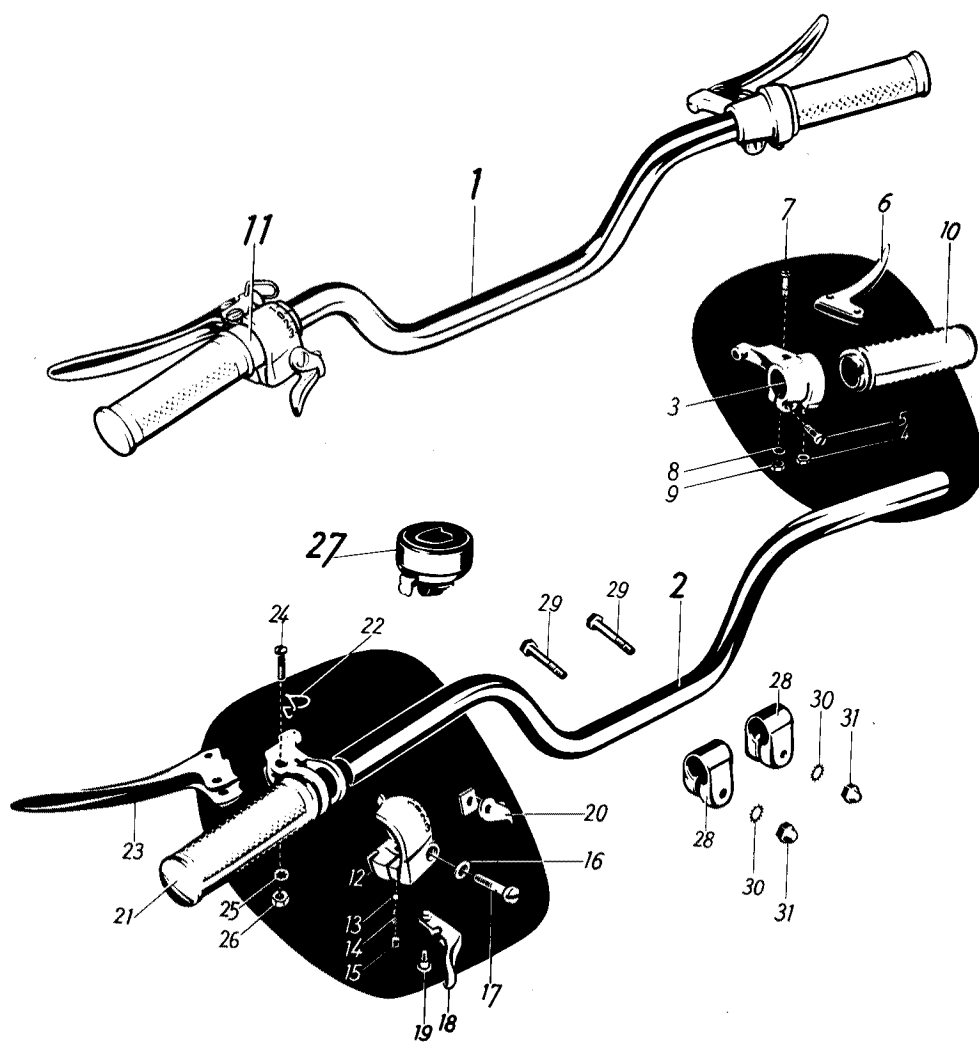


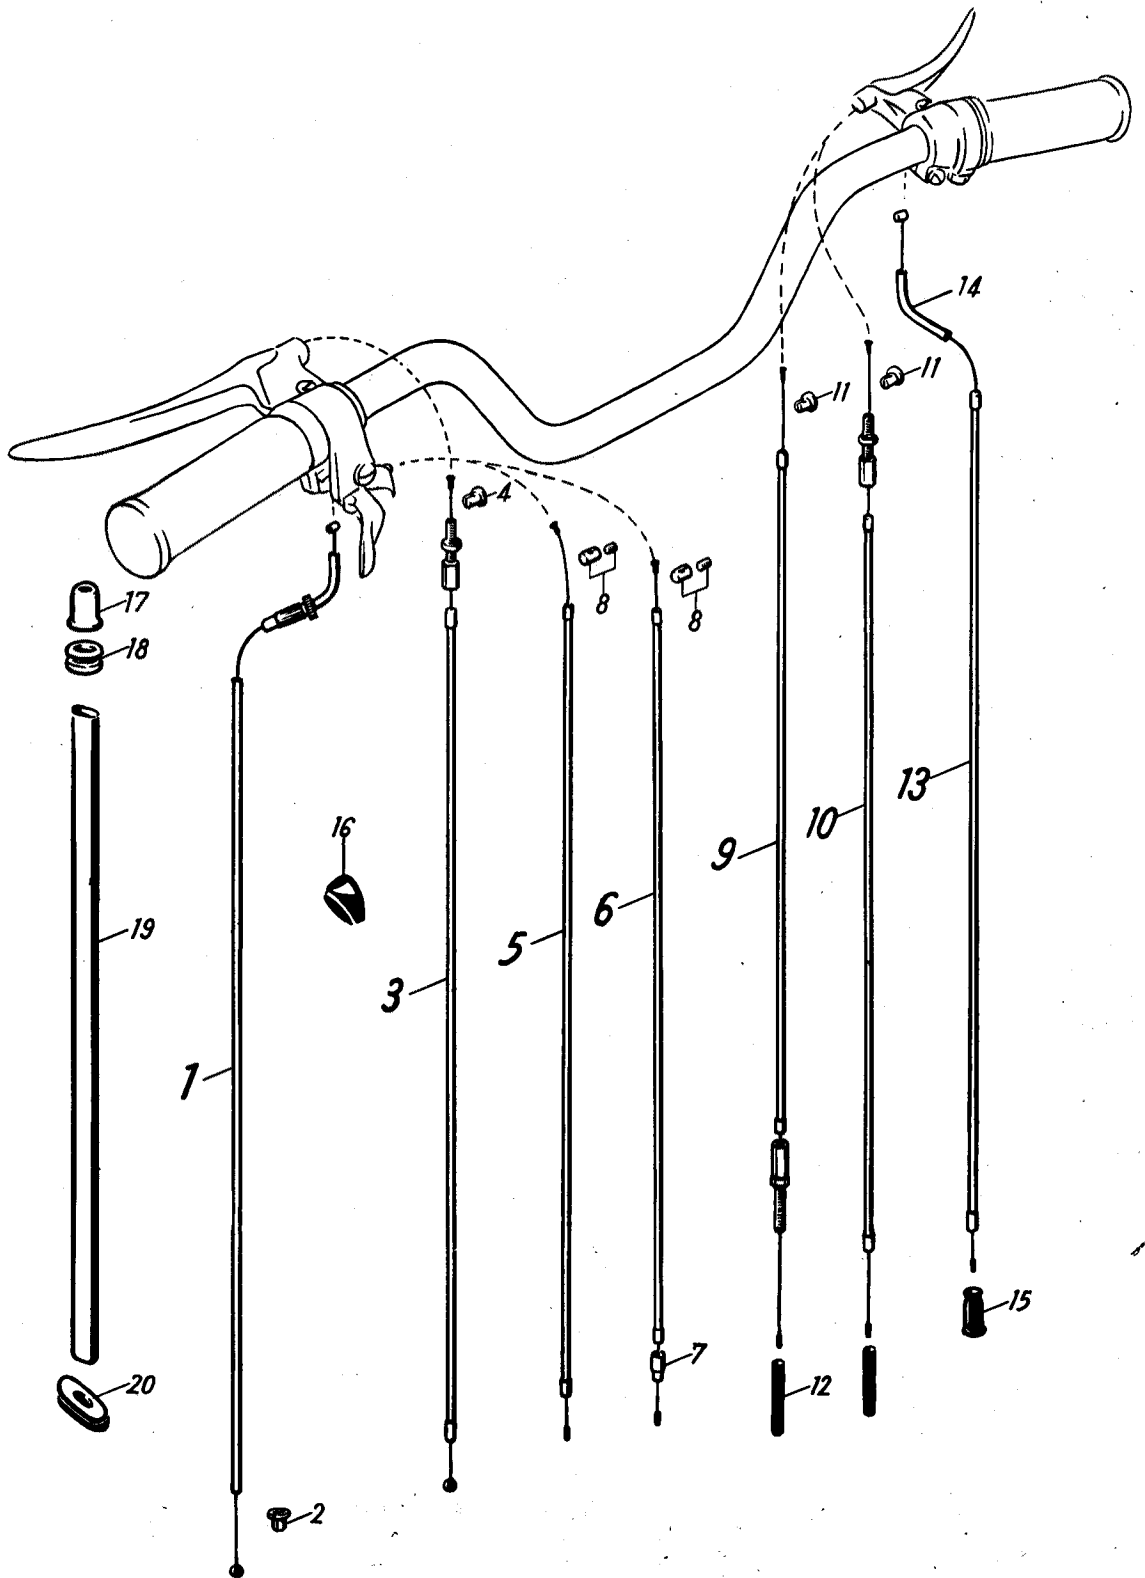

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
N - S				
	1 2 3			
Gear change cable	16 44 00 503	1	→ 482 754 / 522 989	—
Gear change cable	16 44 02 503	1	2 Gears Sleeve 16 44 01 002 should be ordered with this part. 482 755 / 522 990 →	1
Sleeve	16 44 01 002	1		2
Gear change cable	16 44 05 503	2	3 Gears	—
Nipple	16 44 00 056	1		—
Clutch cable	16 44 00 502	1		3
Nipple seat	16 44 00 023	1		4
Decompressor cable	16 44 00 504	1	→ 482 754 / 522 989	5
Decompressor cable	16 44 01 504	1	L = 750 mm 482 755 / 522 990 →	6
Nipple seat	16 44 00 931	1		7
Nipple	16 44 00 021	1		8
Front brake cable	16 44 00 501	1	→ 482 754 / 522 989	9
Front brake cable	16 44 02 501	1	482 755 / 522 990 →	10
Nipple seat	16 44 00 023	1		11
Rubber hose	16 44 00 003	1	L = 80 mm	12
Rubber hose	16 44 01 003	1	L = 48 mm	—
Throttle cable	16 44 00 509	1	upper nipple 2,5 mm → 268 490 / 286 207	—
Throttle cable	16 44 01 509	1		13
Throttle cable	16 44 00 519	1	upper nipple 5 mm 268 491 / 286 208 →	—
Tube	16 44 00 008	1	646 411 / 693 353 →	14
Rubber sleeve	16 44 00 025	1		15
Rubber sleeve	16 44 00 001	1	→ 482 754 / 522 989	16
Rubber cap	16 44 00 040	1		17
Rubber sleeve	16 44 01 001	1		18
Protecting sleeve	16 44 00 039	1	L = 510 mm 482 755 / 522 990 →	19
Rubber sleeve	16 44 00 042	1		20
Rubber cable strap	16 44 00 041	2	2 Gears	—
Rubber cable strap	16 44 01 041	2	3 Gears	—



Description	Order-No.	Quantity	Remarks	Illustr.-No.
12345 QUICKLY N-S				
Front wheel	16 51 00 517	1	for Quickly-N indicate colour for Quickly-S Thickend 3 mm L = 262 mm Thickend 3 mm L = 235 mm → 482 754 / 522 989	—
Front wheel	16 51 00 518	1		—
Rim	16 52 00 038	1		—
Rim (chrome)	16 52 00 036	1		—
Spake	16 52 00 056	18		—
Spake	16 52 00 601	18		—
Nipple	075 751 603	36		—
Front wheel hub	16 51 01 507	1		—
Hub	16 51 01 900	1		1
Ball race	16 51 00 023	2		2
Cone	16 51 01 515	1	→ 261 860 / 279 418	3
Cone, right	16 52 00 015	1		4
Cone, right	16 52 01 015	1	261 861 / 279 419 → → 482 754 / 522 989	5
Seal ring	16 51 00 045	1	18x30,2x5 mm → 482 754 / 522 989	6
Ball cage	16 51 00 044	1		7
Spacer	16 52 01 017	1	39 mm long → 261 860 / 279 418	8
Spacer	16 52 02 017	1	39 mm long 261 861 / 279 419 → → 482 754 / 522 989	9
Tolerance ring	16 52 00 037	1		10
Grooved pin	2,6x3 DIN 1476	1	→ 261 860 / 279 418	—
Cone, left	16 52 00 016	1		11
Cone, left	16 52 01 016	1	261 861 / 279 419 → → 482 754 / 522 989	12
Seal ring	16 51 00 045	1	18x30,2x5 mm	13
Ball cage	16 51 00 044	1		14
Front bracke	16 51 00 511	1		—
Bracke plate	16 51 00 902	1	in earlier vehicles than 50 000 / 52 400 should be ordered only compl.	15
Bracke operating cam	16 51 01 027	1		—
Bracke lever	16 51 00 502	1		16
Spring	16 51 00 035	1		17
Yoke	015 099 180	1	for repair → 482 754 / 522 989	18
Rivet	5x8 DIN 660	1		—
Brake shoe	16 51 01 509	2		19
Lining	16 51 01 001	2		20
Rivet	16 51 00 043	16		21
Spring	16 51 00 030	2		22
Shim	16 51 00 054	as req.	18,2x26x0,2; 0,3 mm	—
Nut	16 51 00 025	1		23

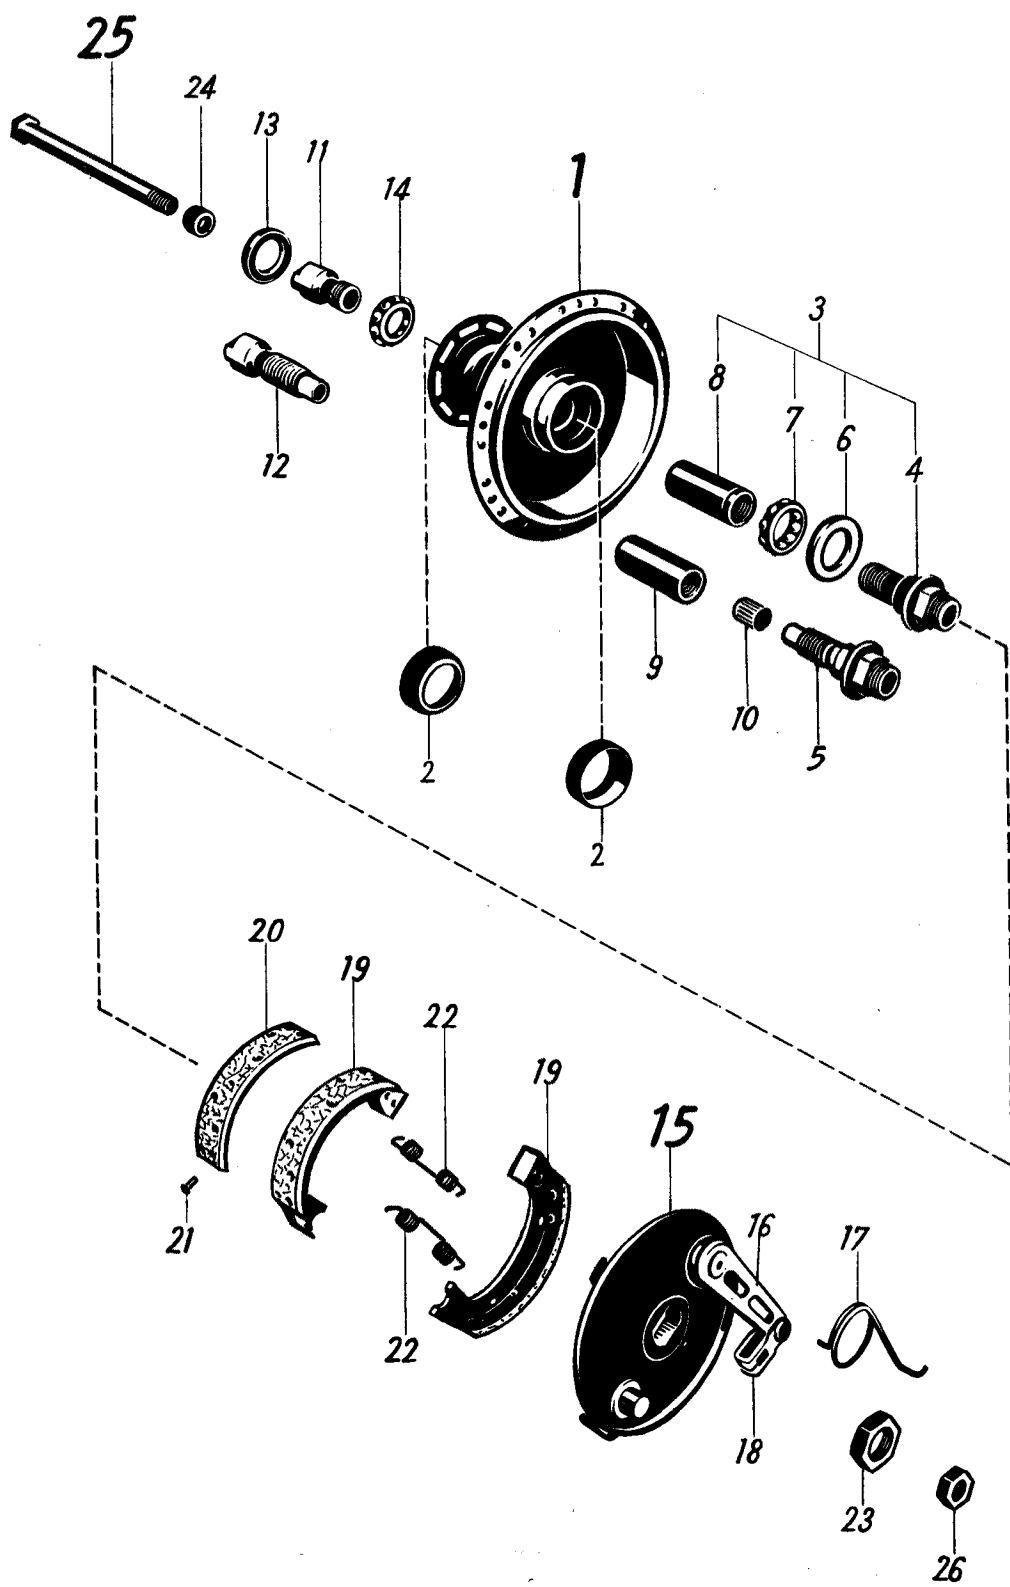


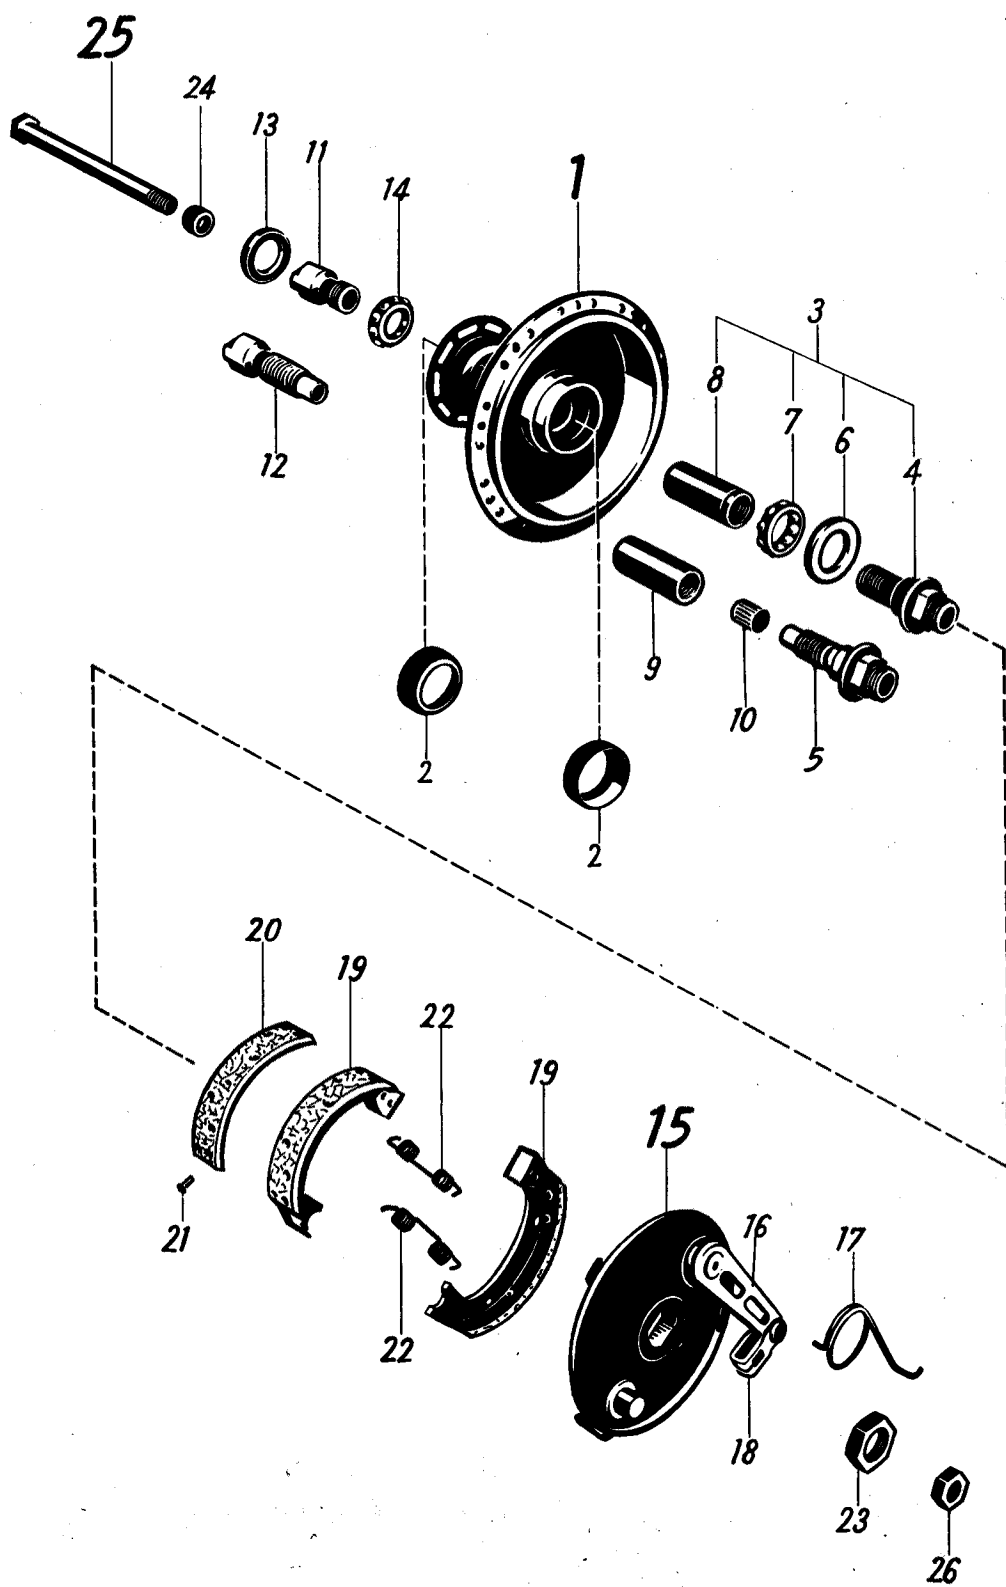

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
Sleeve	16 51 00 009	1	10,2x15x7,6 mm → 50 340 / 52 750	—
Ring	16 51 00 017	1		—
Ring	16 51 00 017	2	10,2x15x3,6 mm 50 341 / 52 751 → → 482 754 / 522 989	24
Spindle	16 51 00 028	1		25
Nut	16 51 00 036	1	→ 482 754 / 522 989	26
Well filler	26—2,00	—		—
Inner tube	26—2,00	—	not supplied	—
Tyre	26—2,00	—		—


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S 1 2 3 4				
Front wheel	16 51 01 517	1		—
Front wheel without brake	16 51 01 518	1		—
Rim	16 52 00 038	1	{ for Quickly-N state colour	—
Rim (chrome)	16 52 00 036	1	for Quickly-S	—
Spoke	16 52 00 056	18	{ Thickend 3 mm L = 262 mm	—
Spoke	16 52 00 055	18	{ Thickend 3 mm L = 233 mm	—
Nipple	075 751 603	36		—
Front wheel hub	16 51 03 507	1		—
Hub	16 51 02 900	1		1
Ball race	16 51 00 023	2		2
Cone	16 52 01 015	1		3
Seal ring	16 51 00 045	1	18x30,2x5 mm	4
Ball cage	16 51 00 044	1		5
Spacer	16 52 02 017	1	39 mm long	6
Tolerance ring	16 52 00 037	1		7
Cone	16 52 01 016	1		8
Seal ring	16 51 00 045	1	18x30,2x5 mm	9
Ball cage	16 51 00 044	1		10
Front brake	16 51 02 511	1	482 755 / 522 990 →	—
Brake plate	16 51 04 503	1		11
Bush	16 52 03 026	1	12x15x19 mm	12
Brake cam	16 51 03 027	1		13
Brake lever	16 51 01 502	1		14
Return spring	16 51 01 035	1		15
Spring washer	B 7 DIN 137	1		16
Nut	16 52 01 043	1		17
Brake shoe	16 51 02 509	2		18
Lining	16 52 01 034	2		19
Rivet	16 51 00 043	16		20
Spring	16 51 03 030	1		21
Shim	16 51 00 054	as req.	18,2x26x0,2; 0,3 mm	22
Shim	16 51 01 054	as req.	18,2x26x0,5 mm	—
Nut	16 51 00 025	1		23
Ring	16 51 02 017	1	10,2x15x9,2 mm	24
Spindle	16 51 02 028	1		25
Nut	16 51 00 036	2		26
Well filler	26—2,00	—		—
Inner tube	26—2,00	—	not supplied	—
Tyre	26—2,00	—		—

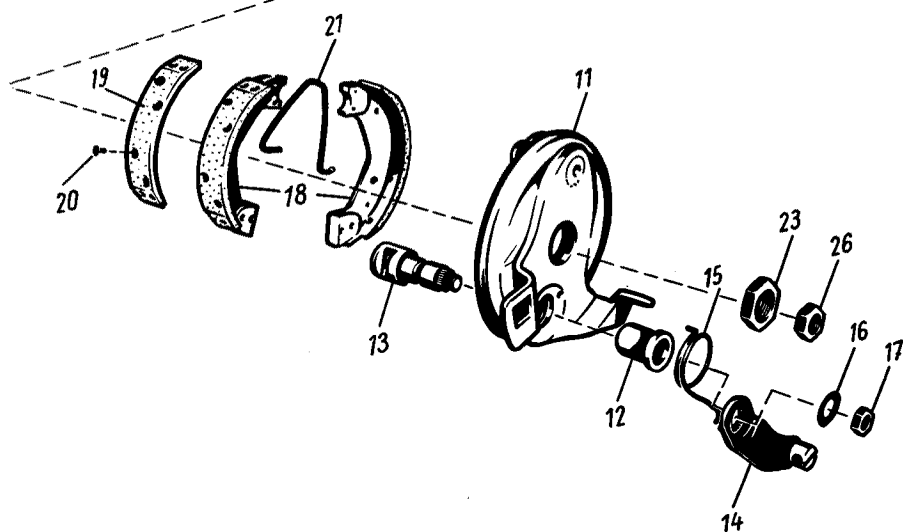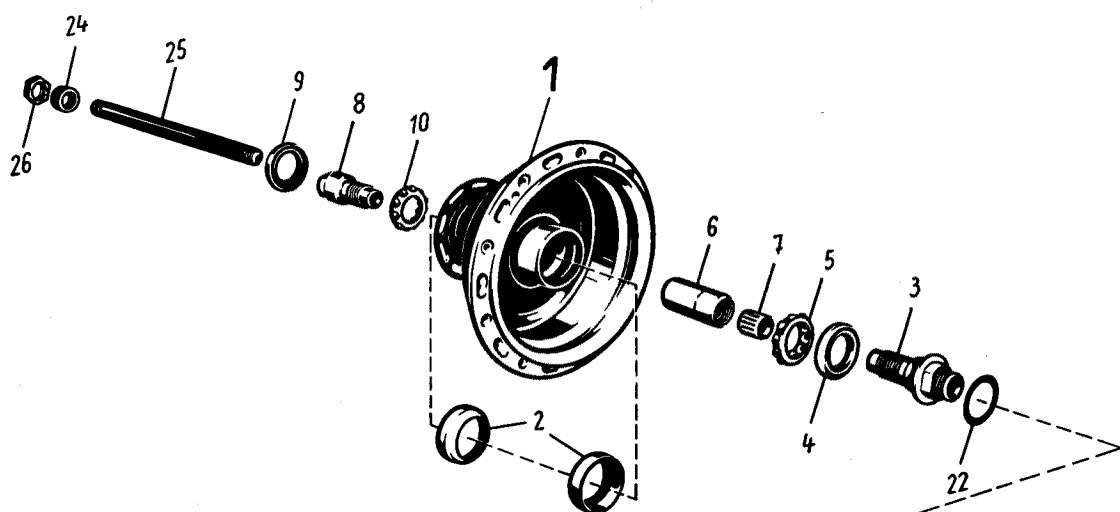


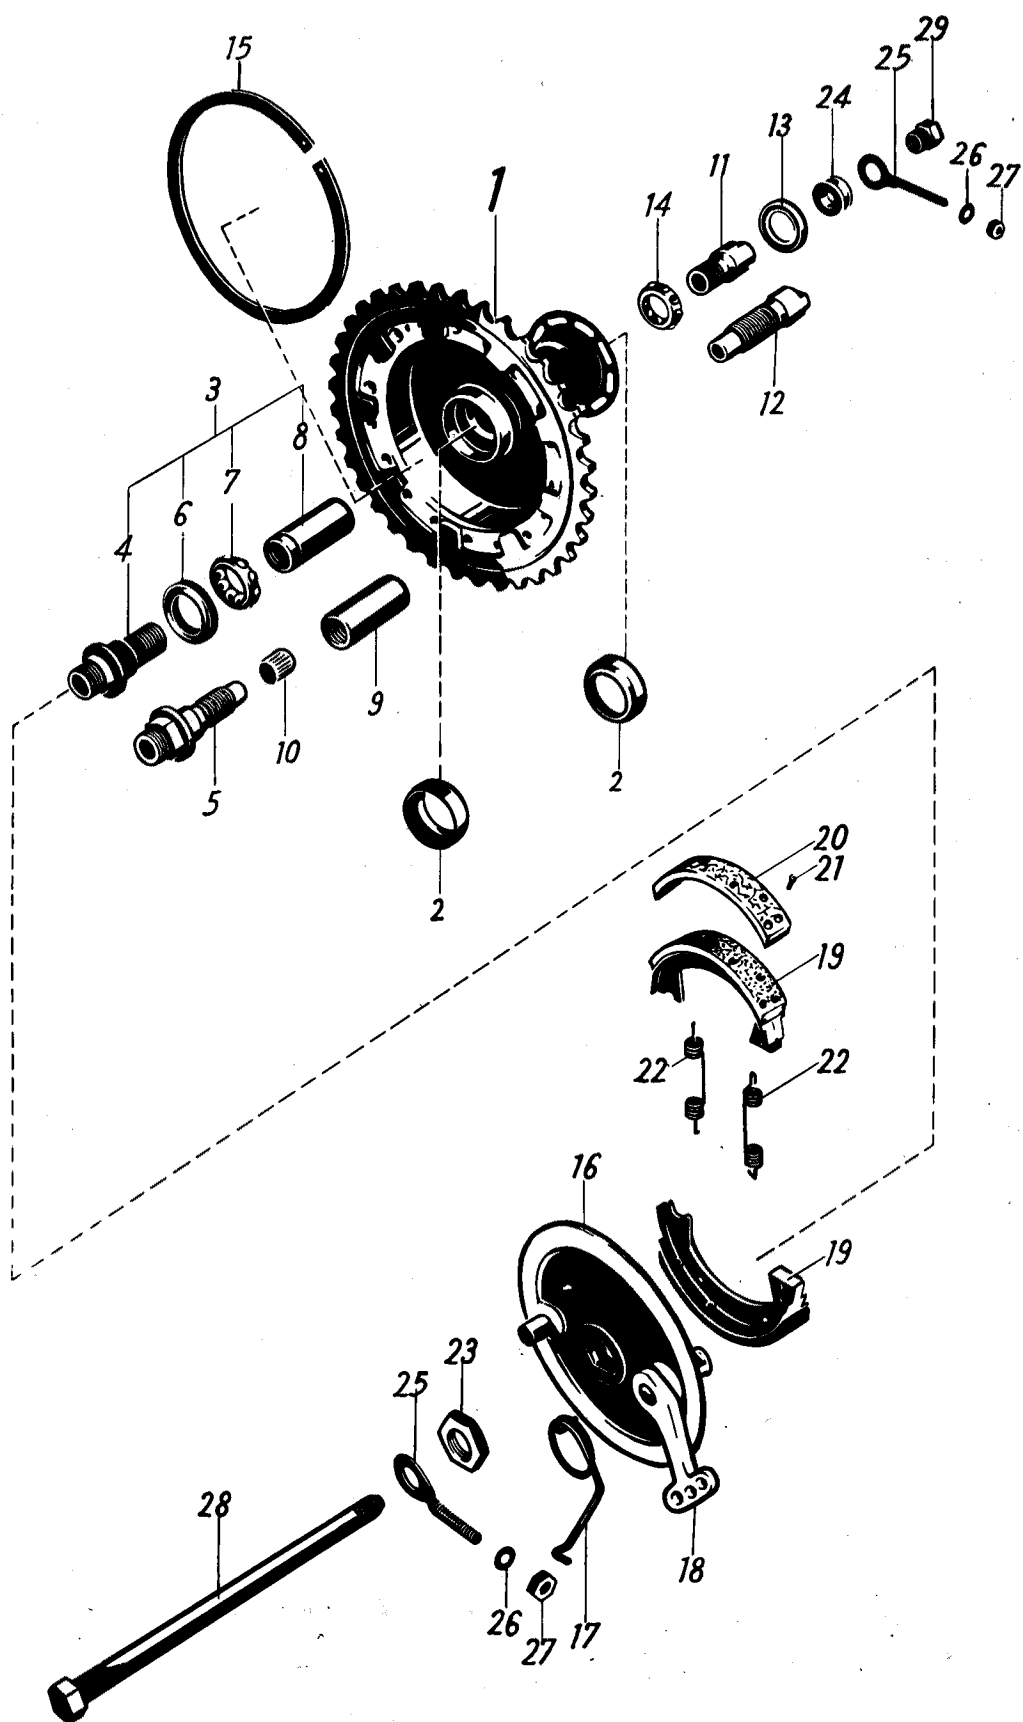

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
	1 2 3 4			
Rear wheel	16 52 00 519	1	36 No of teeth	—
Rear wheel without brake	16 52 00 520	1	36 No of teeth	—
Rim	16 52 00 038	1		—
Rim (chrome)	16 52 00 036	1	→ 482 754 / 522 989	—
Spoke	16 52 00 601	18	236 mm / 3 mm diam	—
Spoke	16 52 00 056	18	262 mm / 3 mm diam	—
Nipple	075 751 603	36		—
Rear wheel hub	16 52 02 508	1	36 No of teeth	—
Hub	16 52 02 900	1	36 No of teeth	1
Ball race	16 51 00 023	2		2
Cone	16 51 01 515	1	→ 259 464 / 277 026	3
Cone, left	16 52 00 015	1		4
Cone, left	16 52 01 015	1	{ 259 465 / 277 027 → → 482 754 / 522 989	5
Seal ring	16 51 00 045	1	18x30,2x5 → 482 754 / 522 989	6
Ball cage	16 51 00 044	1		7
Spacer	16 52 01 017	1	{ 39 mm → 259 464 / 277 026	8
Spacer	16 52 02 017	1	39 mm 259 465 / 277 027 → → 482 754 / 522 989	9
Tolerance ring	16 52 00 037	1		10
Grooved pin	2,6x3 DIN 1476	1	→ 259 464 / 277 026	—
Cone, right	16 52 00 016	1		11
Cone, right	16 52 01 016	1	{ 259 465 / 277 027 → → 482 754 / 522 989	12
Seal ring	16 51 00 045	1	18x30,2x5 → 482 754 / 522 989	13
Ball cage	16 51 00 044	1		14
Circlip	16 52 00 031	1	{ 67 501 / 72 318 → → 482 754 / 522 989	15

Description	Order-No.	Quantity	Remarks	Illustr.-No
QUICKLY N-S				
	1 2 3 4			
Rear brake	16 52 01 509	1	Brake plate 132 mm diam in earlier vehicles than 67 500 / 72 317 order Circlip 16 52 00 031 with this part	—
Brake plate	16 52 01 903	1	Brake plate 132 mm diam in earlier vehicles than 67 500 / 72 317 order Circlip 16 52 00 031 with this part	16
Spring	16 52 01 021	1		17
Brake operating cam	16 51 01 027	1		—
Brake lever	16 52 01 003	1		18
Brake shoe	16 51 00 509	2		19
Lining	16 51 00 001	2		20
Rivet	16 51 00 043	16		21
Spring	16 51 00 030	2	→ 482 754 / 522 989	22
Shim	16 51 00 054	as req.	18,2x26x0,2	—
Nut	16 51 00 025	1		23
Spacer	16 52 01 018	1	10,5 mm	24
Chain adjusting screw	16 52 00 011	2		25
Spring washer	B 6 DIN 137	2		26
Nut	M 6 DIN 934	2		27
Spindle	16 52 00 014	1		28
Nut	16 51 01 036	1		29
Well filler	26—2,00	—	} not supplied	—
Inner tube	26—2,00	—		—
Tyre	26—2,00	—		—

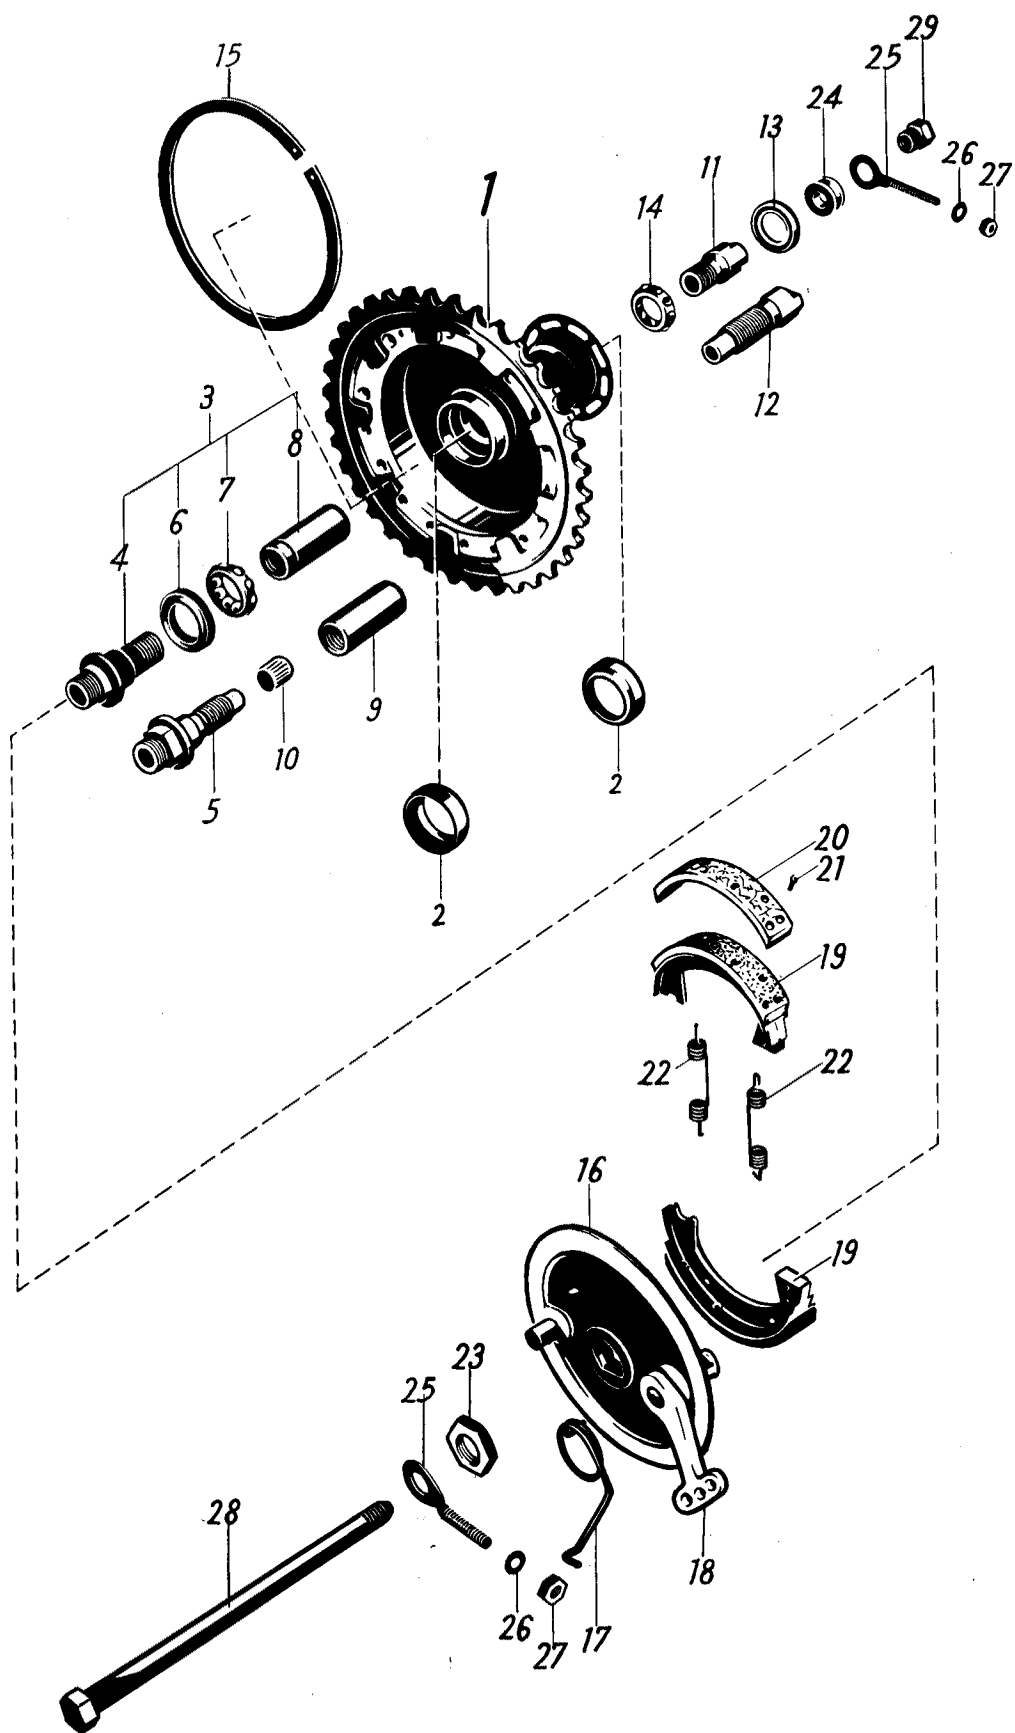

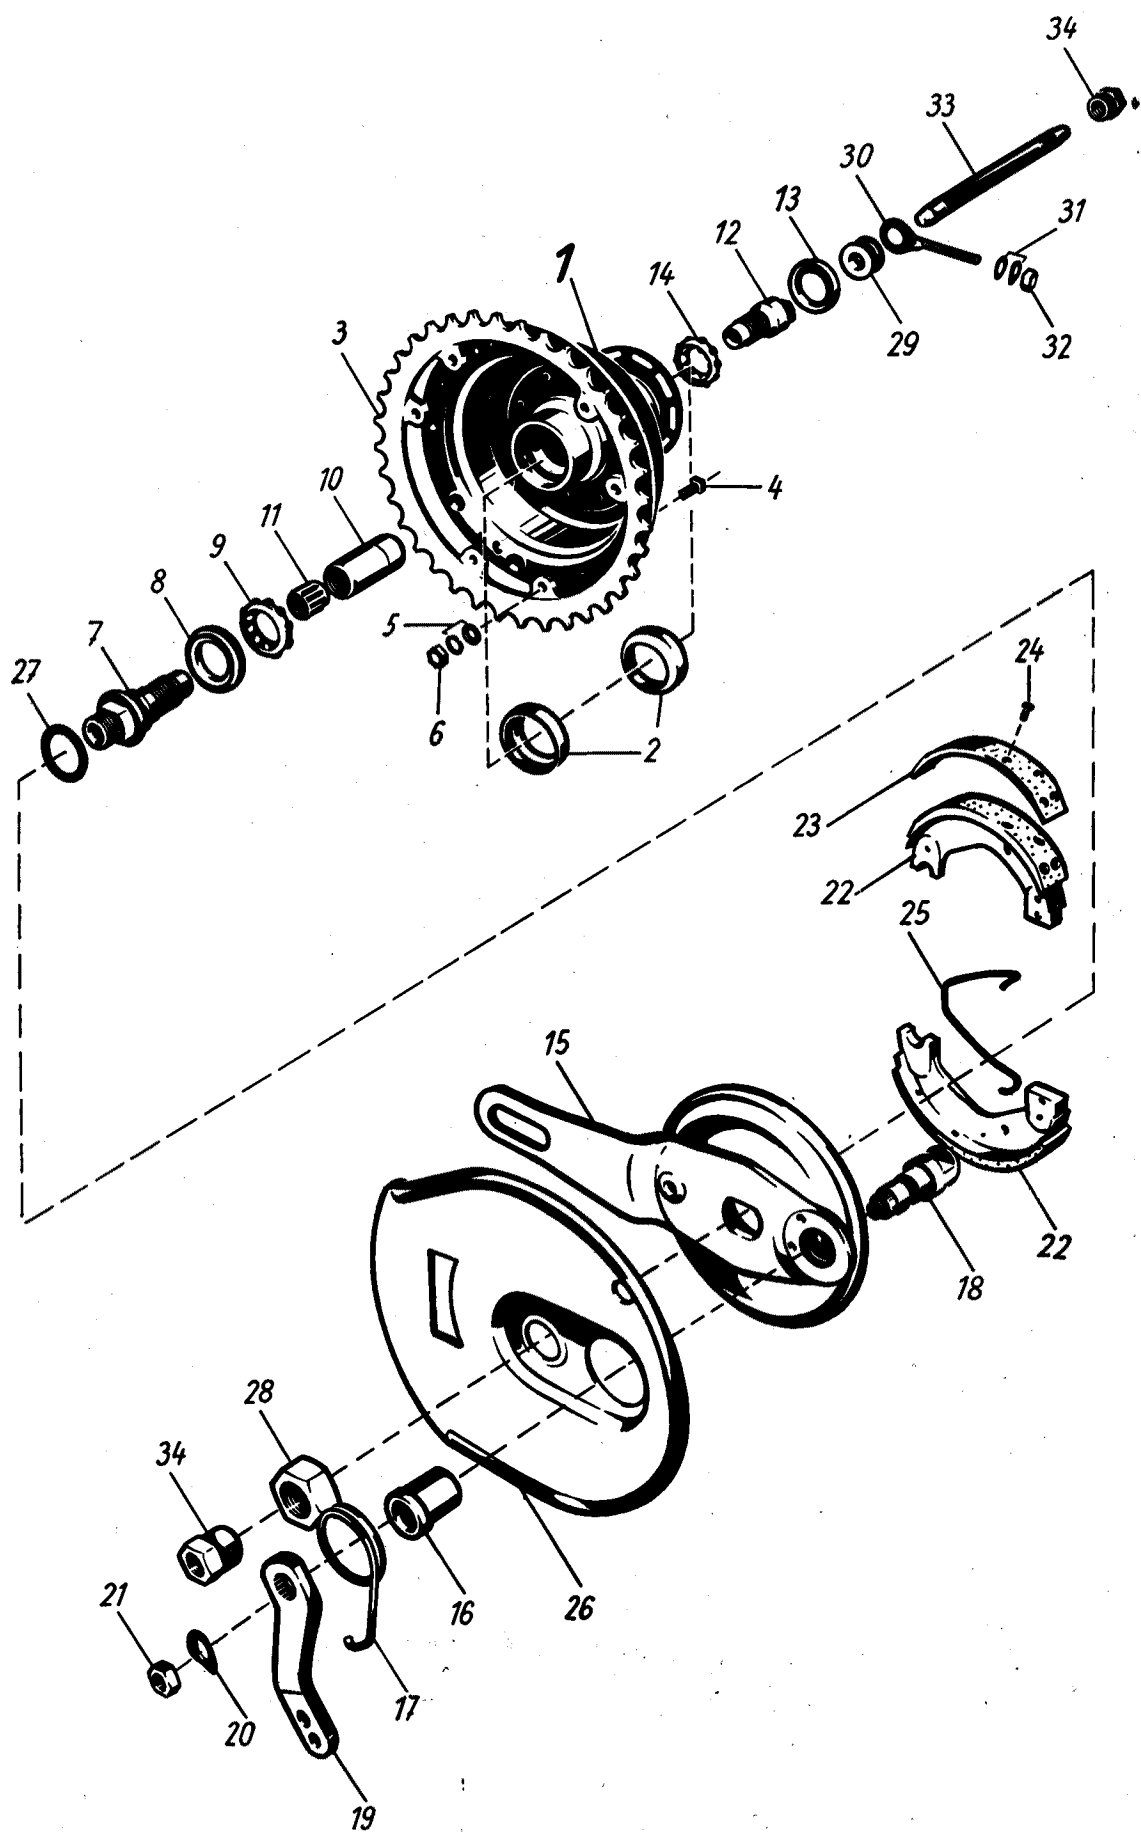



Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S 1 2 3 4				
Rear wheel	16 52 01 519	1	36 No of teeth	—
Rear wheel (without brake)	16 52 01 520	1	36 No of teeth	—
Rim	16 52 00 038	1	for Quickly-N; please state colour	—
Rim (chrome)	16 52 00 036	1	for Quickly-S	—
Spoke	16 52 00 056	18	L = 233 mm	—
Spoke	16 52 00 055	18	L = 262 mm	—
Nipple	075 751 603	36		—
Rear wheel hub	16 52 03 508	1	36 No of teeth	—
Hub	16 52 03 900	1	36 No of teeth	1
Ball race	16 51 00 023	2		2
Sprocket	16 52 03 005	1	36 No of teeth	3
Bolt	16 52 01 044	6		4
Spring ring	A 5 DIN 127	6		5
Nut	16 52 00 045	6		6
Cone	16 52 01 015	1		7
Seal ring	16 51 00 045	1	18x30,2x5 mm	8
Ball cage	16 51 00 044	1	1/4" diam	9
Spacer	16 52 02 017	1	39 mm	10
Tolerancing	16 52 00 037	1	482 755 / 522 990 →	11
Cone	16 52 01 016	1		12
Seal ring	16 51 00 045	1	18x30,2x5 mm	13
Ball cage	16 51 00 044	1		14
Rear brake	16 52 02 509	1		—
Brake plate	16 52 01 518	1		15
Bush	16 52 03 026	1	12x15x19 mm	16
Spring	16 52 03 021	1		17
Brake operating cam	16 51 03 027	1		18
Brake lever	16 52 03 003	1		19
Spring washer	B 7 DIN 137	1		20
Nut	16 52 01 043	1		21
Brake shoe	16 51 02 509	2		22
Lining	16 52 01 034	2		23
Rivet	16 51 00 043	16		24
Spring	16 51 03 030	1		25
Cover	16 52 00 046	1		26
Shim	16 51 00 054	as req.	18,2x26x0,2; 0,3 mm	27
Shim	16 51 01 054	as req.	18,2x26x0,5 mm	—
Nut	16 52 00 049	1		28

Group 52
Rear wheel

NSU-Quickly (N-S)


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
Spoker	16 52 01 018	1	482 755 / 522 990 →	29
Chain adjusting screw	16 52 00 011	2		30
Spring washer	B 6 DIN 137	2		31
Nut	M 6 DIN 934	2		32
Spindle	16 52 01 014	2		33
Nut	16 51 01 036	2		34
Well filler	26—2,00	—	not supplied	—
Inner tube	26—2,00	—		—
Tyre	26—2,00	—		—

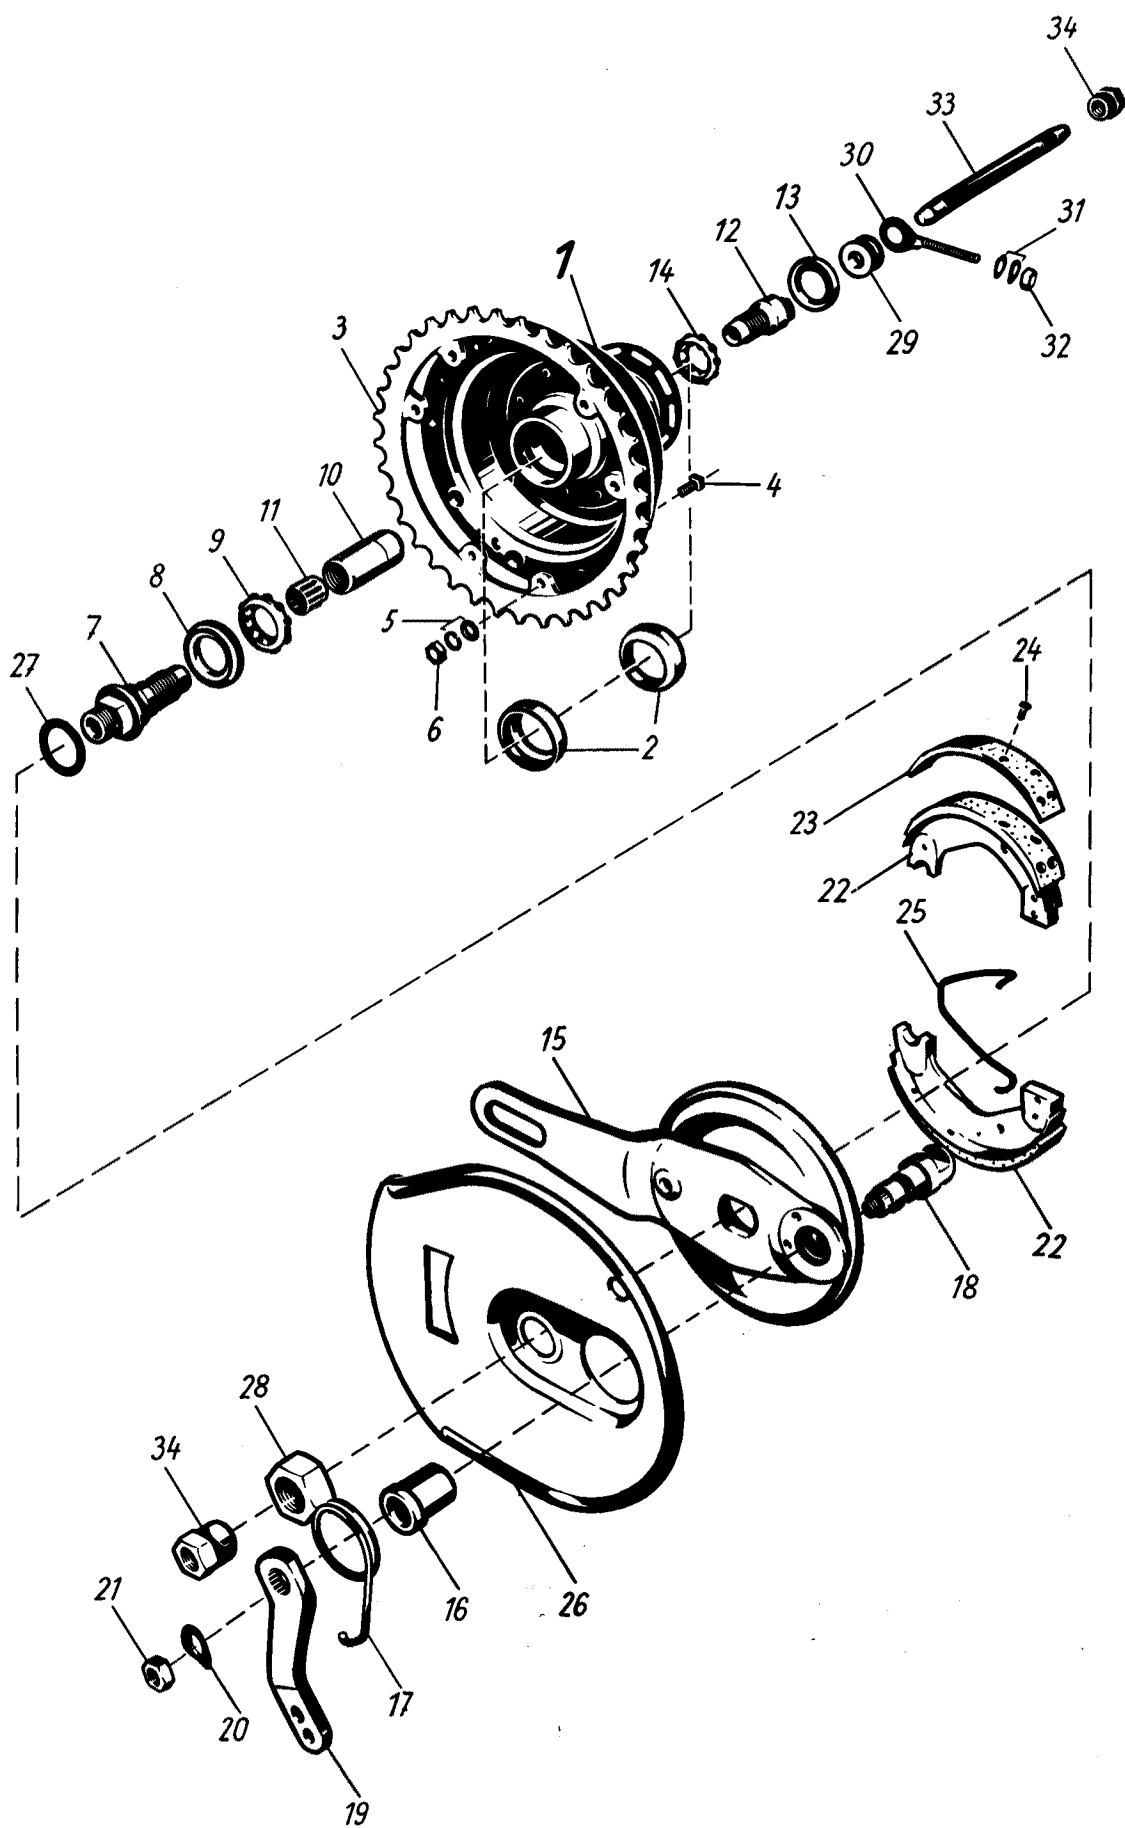


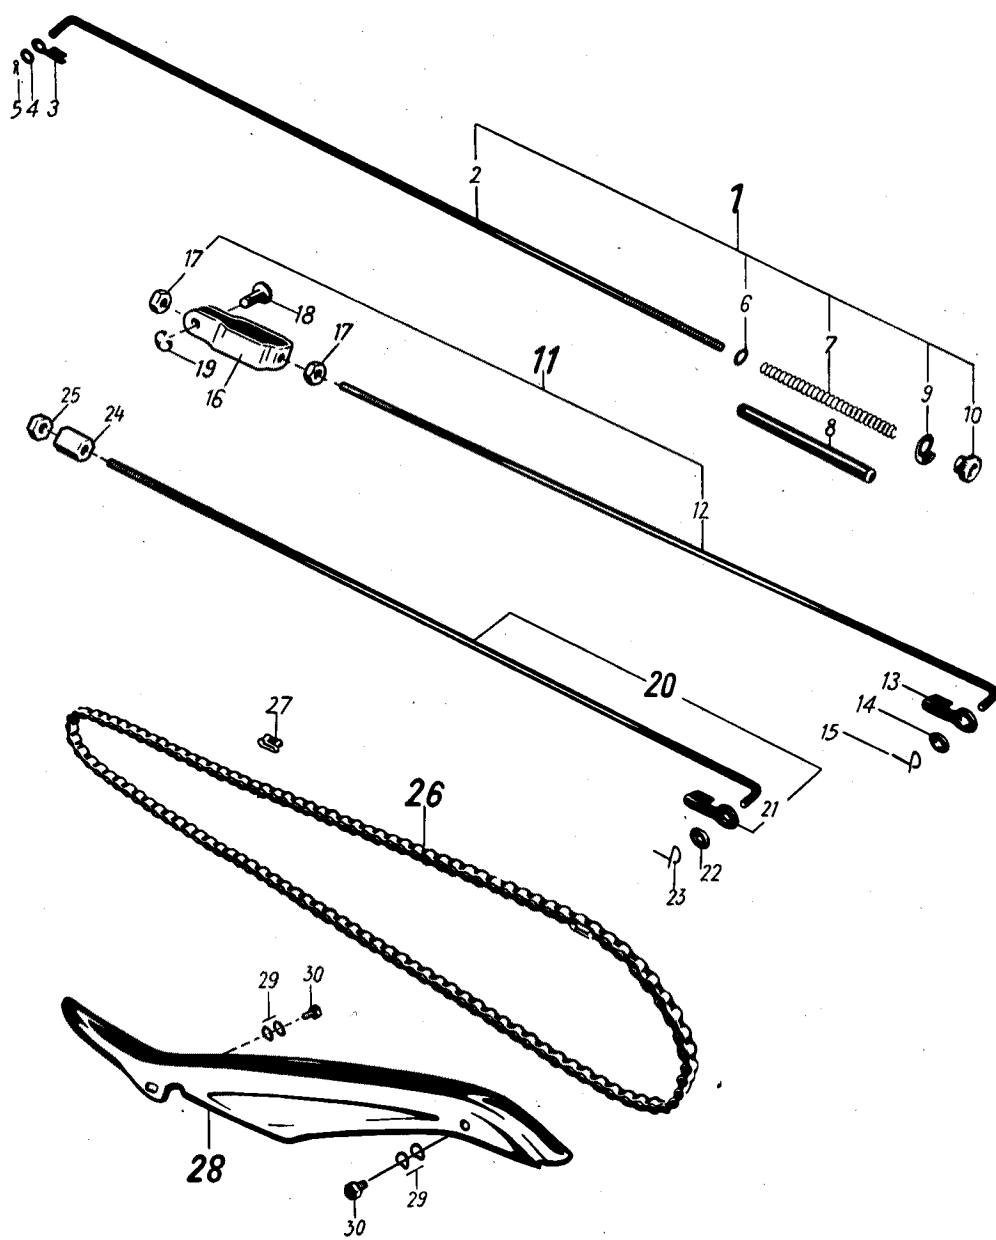

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
Brake rod assy	16 53 00 501	1	L = 555 mm	1
Brake rod	075 753 506	1		2
Lock plate	025 100 655	1		3
Washer	125 059 963	1	5,2x12x1 mm	4
Split pin	2x15 DIN 94	1		5
Washer	125 059 963	1	5,2x12x1 mm	6
Spring	035 044 998	1		7
Hose	035 099 491	1		8
Lock plate	16 53 00 002	1		9
Nut	16 53 00 003	1		10
Brake rod assy	16 53 00 900	1	L = 505 mm	11
Brake rod	16 53 00 502	1		12
Lock plate	025 100 655	1		13
Washer	125 059 963	1	5,2x12x1 mm	14
Locking spg.	11 53 00 819	1	50 341 / 52 751 → → 482 754 / 522 989	15
Clevis link	16 53 00 006	1		16
Nut	M 5 DIN 934	2		17
Pin	16 53 00 005	1		18
Circlip	5 DIN 6799	1		19
Brake rod assy	16 53 01 502	1	L = 557 mm	20
Lock plate	025 100 655	1		21
Washer	125 059 963	1	5,2x12x1 mm	22
Locking spring	11 53 00 819	1	482 755 / 522 990 →	23
Nut	16 53 01 003	1		24
Nut	M 5 DIN 934	1		25
Final drive and guard				
Chain				
112 links	16 54 00 600	1	1 E 12,7x4,88 DIN 8180	26
Connecting link	16 54 00 601	1	1 E 12,7x4,88 DIN 8180	27
Cranked link, double	16 54 00 603	1	1 C 12,7x4,88 DIN 8180	—
Chain guard	16 54 00 501	1		28
Spring washer	B 6 DIN 137	4		29
Screw	M 6x10 DIN 933	2		30


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
	1 2			
Exhaust pipe	16 71 00 005	1	for exhaust system left	20
Exhaust pipe	16 71 01 005	1	for exhaust system right	21
Seal ring	16 71 00 002	2		22
Union	16 71 00 001	1		23
Silencer assy	16 71 00 502	1	{ not supplied order 16 71 02 502	—
Silencer	16 71 00 503	1	→ 100 500 / 107 393	24
Outer tube	16 71 00 504	1	103 081 / 109 873 → → 105 060 / 112 072	25
Spring washer	A 6 DIN 137	2		26
Nut	16 71 00 600	1		27
Silencer assy	16 71 01 502	1	{ L = 525 mm not supplied order 16 71 02 502	—
Silencer	16 71 00 505	1	100 501 / 107 394 →	28
Baffle	16 71 00 009	1	→ 103 080 / 109 872 105 061 / 112 073 → → 331 788 / 349 435	29
Spring	16 71 00 506	1		30
Silencer assy	16 71 02 502	1	L = 625 mm	31
Silencer	16 71 02 505	1		32
Baffle	16 71 01 009	1	331 789 / 349 436 →	33
Lock washer	J 4,3 DIN 6798	1		34
Screw	M 4x8 DIN 86	1		35
Silencer clip	16 71 02 008	1		36
Bolt	AM 6x18 DIN 86	1	100 501 / 107 394 →	37
Spring ring	A 6 DIN 127	1	→ 103 080 / 109 872 105 061 / 112 073 →	38
Nut	M 6 DIN 934	1		39
Clip	16 71 00 006	1		40
Bolt	M 5x18 DIN 933	1		41
Spring washer	A 5 DIN 137	2		42
Nut	M 5 DIN 934	1		43
Spring washer	B 6 DIN 137	2		44
Bolt	M 6x12 DIN 933	1		45

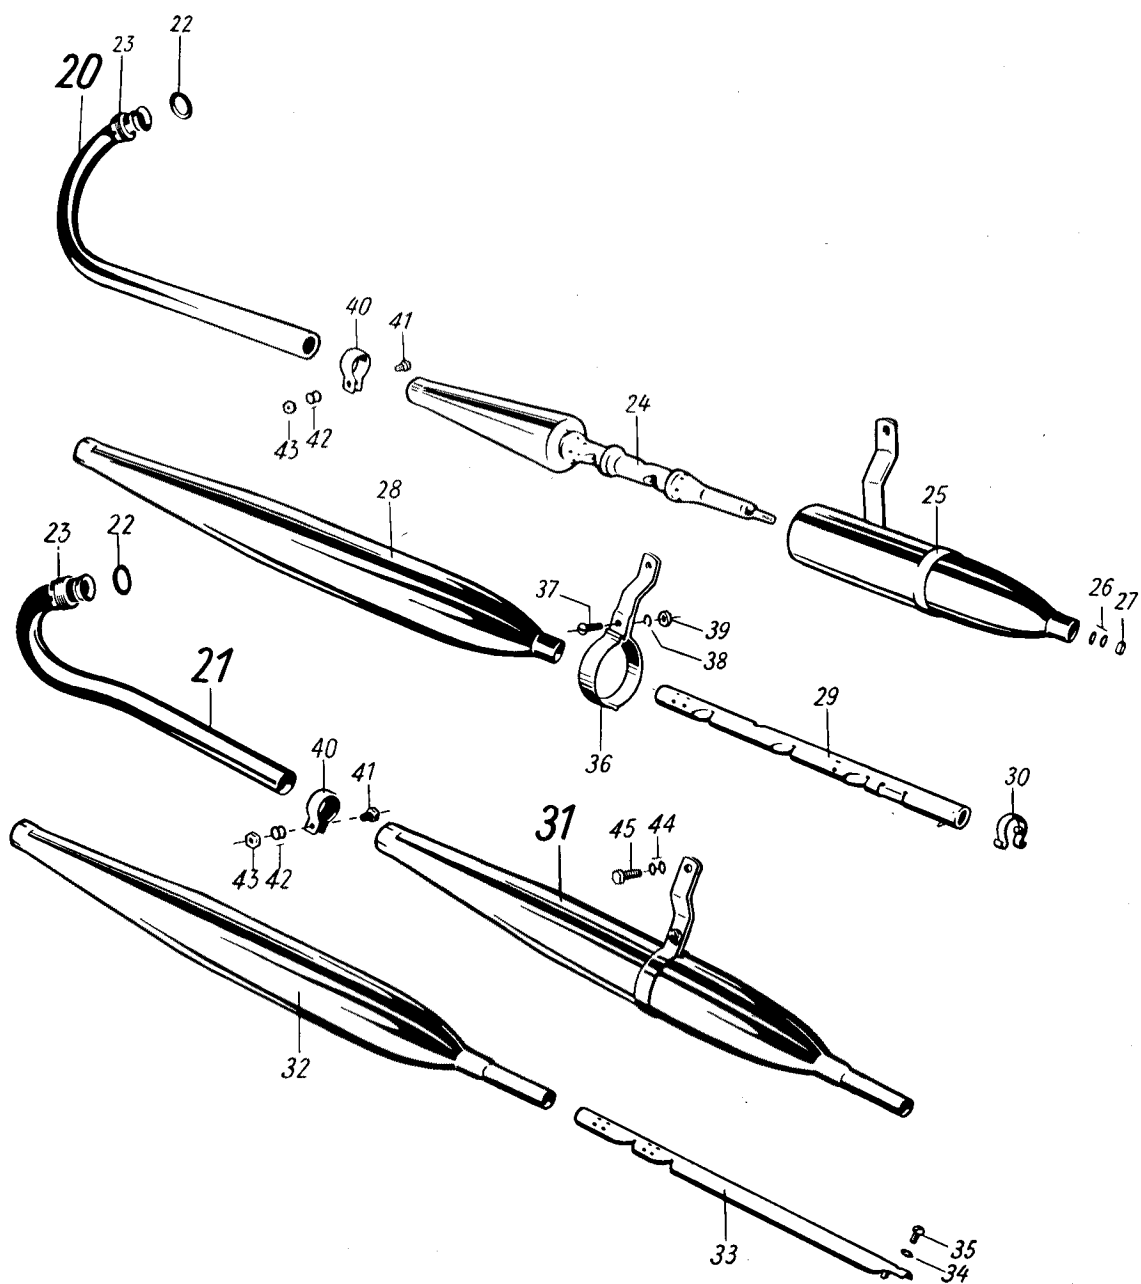


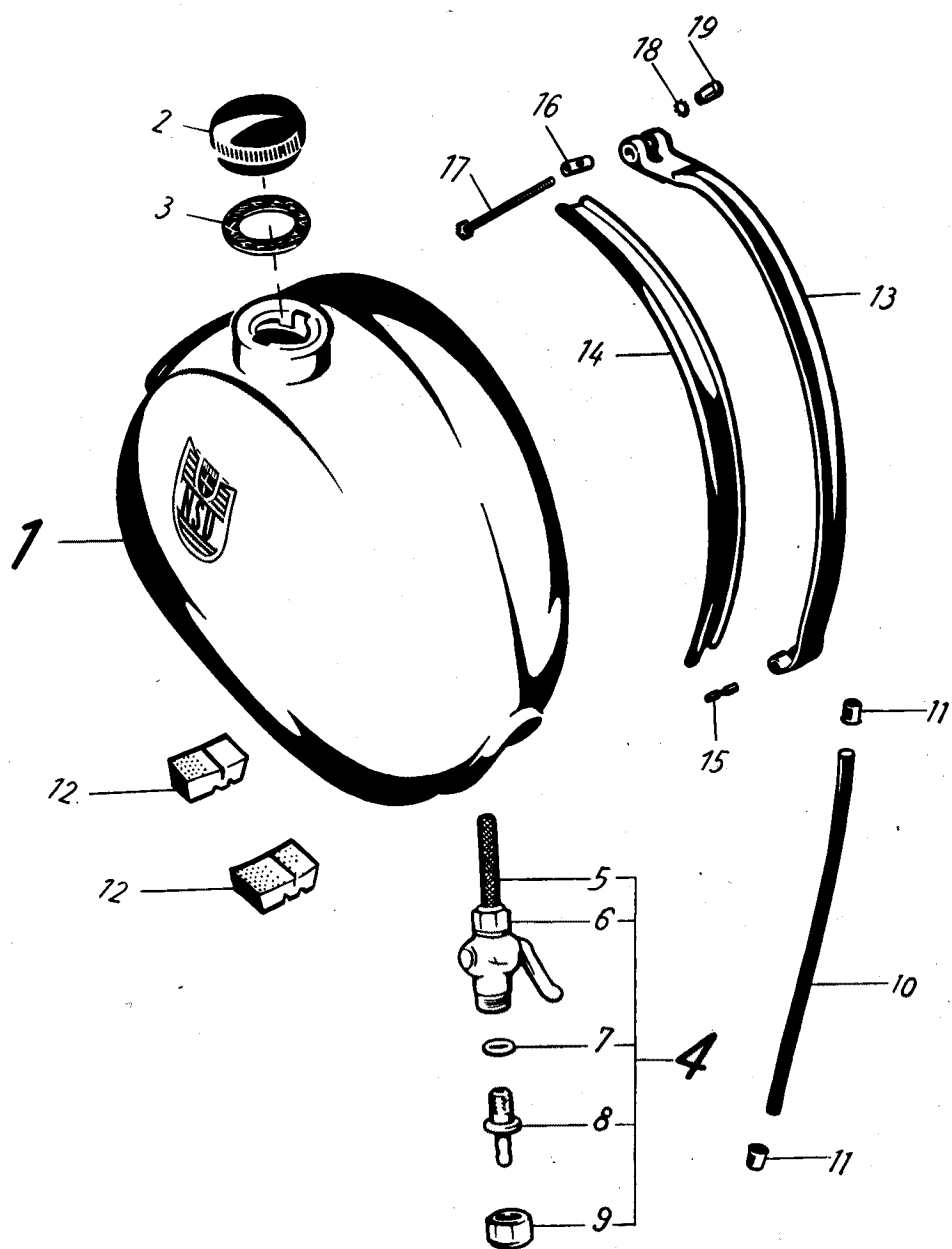

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
N - S				
Fuel tank	16 72 00 501	1	3,1 l { not supplied, order 16 72 00 508 and strap 16 72 01 003	—
Fuel tank	16 72 00 508	1	4,45 l state colour	1
Emblem	16 72 01 035	2		—
Transfer, left (NSU)	16 72 00 023	1		—
Transfer, right (NSU)	16 72 00 022	1		—
Transfer (2-stroke mixture)	073 772 030	1		—
Rubber strip	16 72 00 032	2	for vehicles with leg shield	—
Filler cap	16 72 01 504	1		2
Gasket	16 72 00 024	—		3
Fuel tap	16 72 01 505	1		4
Strainer	16 72 00 905	1		5
Gasket	16 72 00 903	1		—
Nut	16 72 00 904	1		6
Gasket	16 72 00 901	1		7
Connector	16 72 00 900	1		8
Cap nut	16 72 00 902	1		9
Hose	033 109 155	1	L = 9x200 mm	10
Sleeve	023 104 269	1		11
Fuel tank attachment fittings				
Rubber block	16 72 00 004	2		12
Strap	16 72 00 003	1	for 3,1 l fuel tank	—
Strap	16 72 01 003	1	for 4,45 l fuel tank	13
Pad	16 72 01 007	1		14
Pin rear	16 72 00 010	1		15
Forked pin	—	—	} s. page 33, Illustr. No. 6,7	—
Rivet	—	—		—
Pin, front	16 72 00 019	1		16
Bolt	M 5x60 DIN 931	1	for 3,1 l fuel tank	—
Bolt	16 72 00 033	1	for 4,45 l fuel tank	17
Lock washer	A 5,3 DIN 6798	1		18
Nut	16 72 00 008	1		19


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
	1 2 3			
Head lamp	16 81 00 513	1	→ 281 717 / 299 049 not supplied, order 16 81 01 516	1
Head lamp	16 81 01 516	1	281 718 / 299 050 →	2
Adaptor	16 81 00 913	1		3
Rim	16 81 01 914	1		—
Lens	16 81 52 915	1		—
Gasket	16 81 00 917	1		—
Reflector	16 81 00 916	1		—
Spring	16 81 51 918	3		—
Socket	16 81 00 925	1		4
Spring	16 81 00 919	1		5
Bulb	16 81 00 514	1	6 V 15/15 W	6
Switch lever	16 81 00 905	1	→ 281 717 / 299 049	—
Switch lever	16 81 01 905	1	281 718 / 299 050 →	—
Contact plate	16 81 00 920	1		—
Contact plate	16 81 01 920	1		—
Contact bridge	16 81 00 906	1	L = 32 mm	—
Contact bridge	16 81 01 906	1	L = 26 mm	—
Spring	16 81 01 907	1		—
Washer	16 81 00 908	1		—
Split pin	1x12 DIN 94	1		—
Angle	16 81 00 910	1		—
Spg. washer	A 4 DIN 137	1		—
Knurled screw	16 81 00 911	1		—
Rubber sleeve	16 81 00 912	2		—
Rubber sleeve	16 81 00 934	1	} 281 718 / 299 050 →	—
Dummy cover	16 81 00 931	1		—
Dipswitch	16 81 00 904	1		7
Fixing clip	16 81 00 927	1		—
Lead	16 81 00 903	1		—
Bracket for head lamp	16 81 00 928	1	281 718 / 299 050 →	8
Washer	16 43 00 049	2	577 253 / 618 588 →	—
Screw	M 8x10 DIN 933	1	} 281 718 / 299 050 →	9
Lock washer	A 8,4 DIN 6798	1		10
Washer	8,4 DIN 433	1		11
Rattle	16 81 00 506	1		12
Lead	16 81 00 003	1	L = 250 mm	—

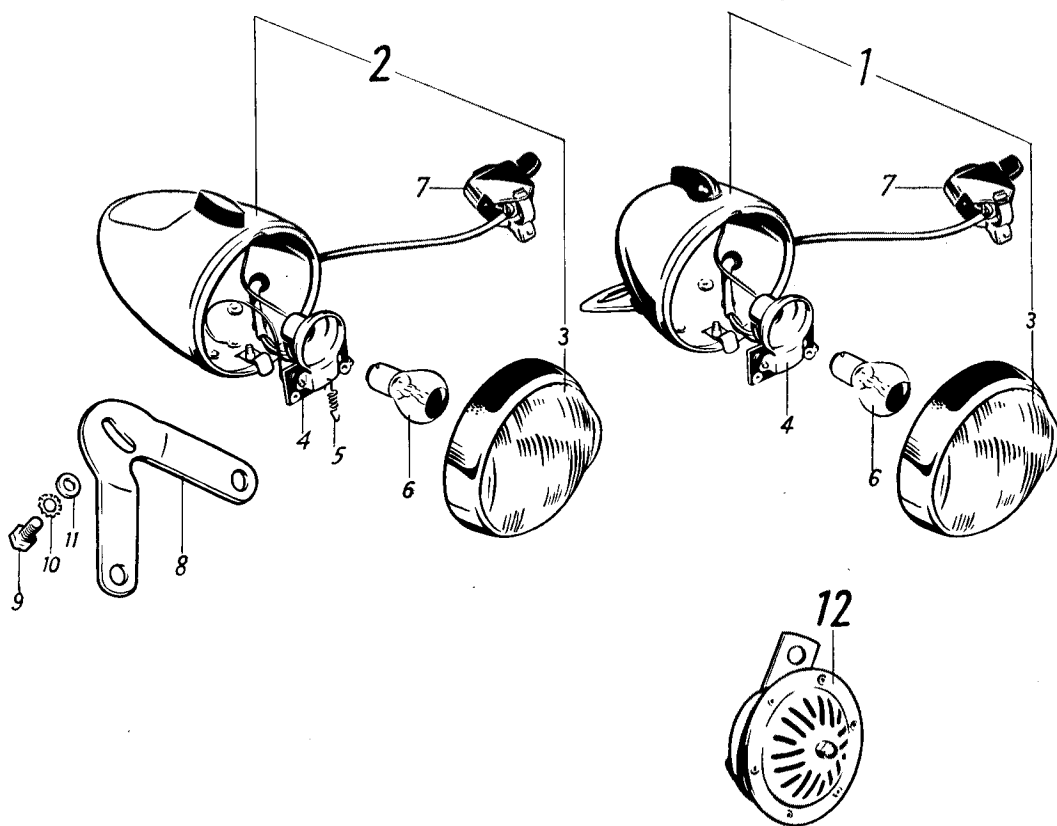


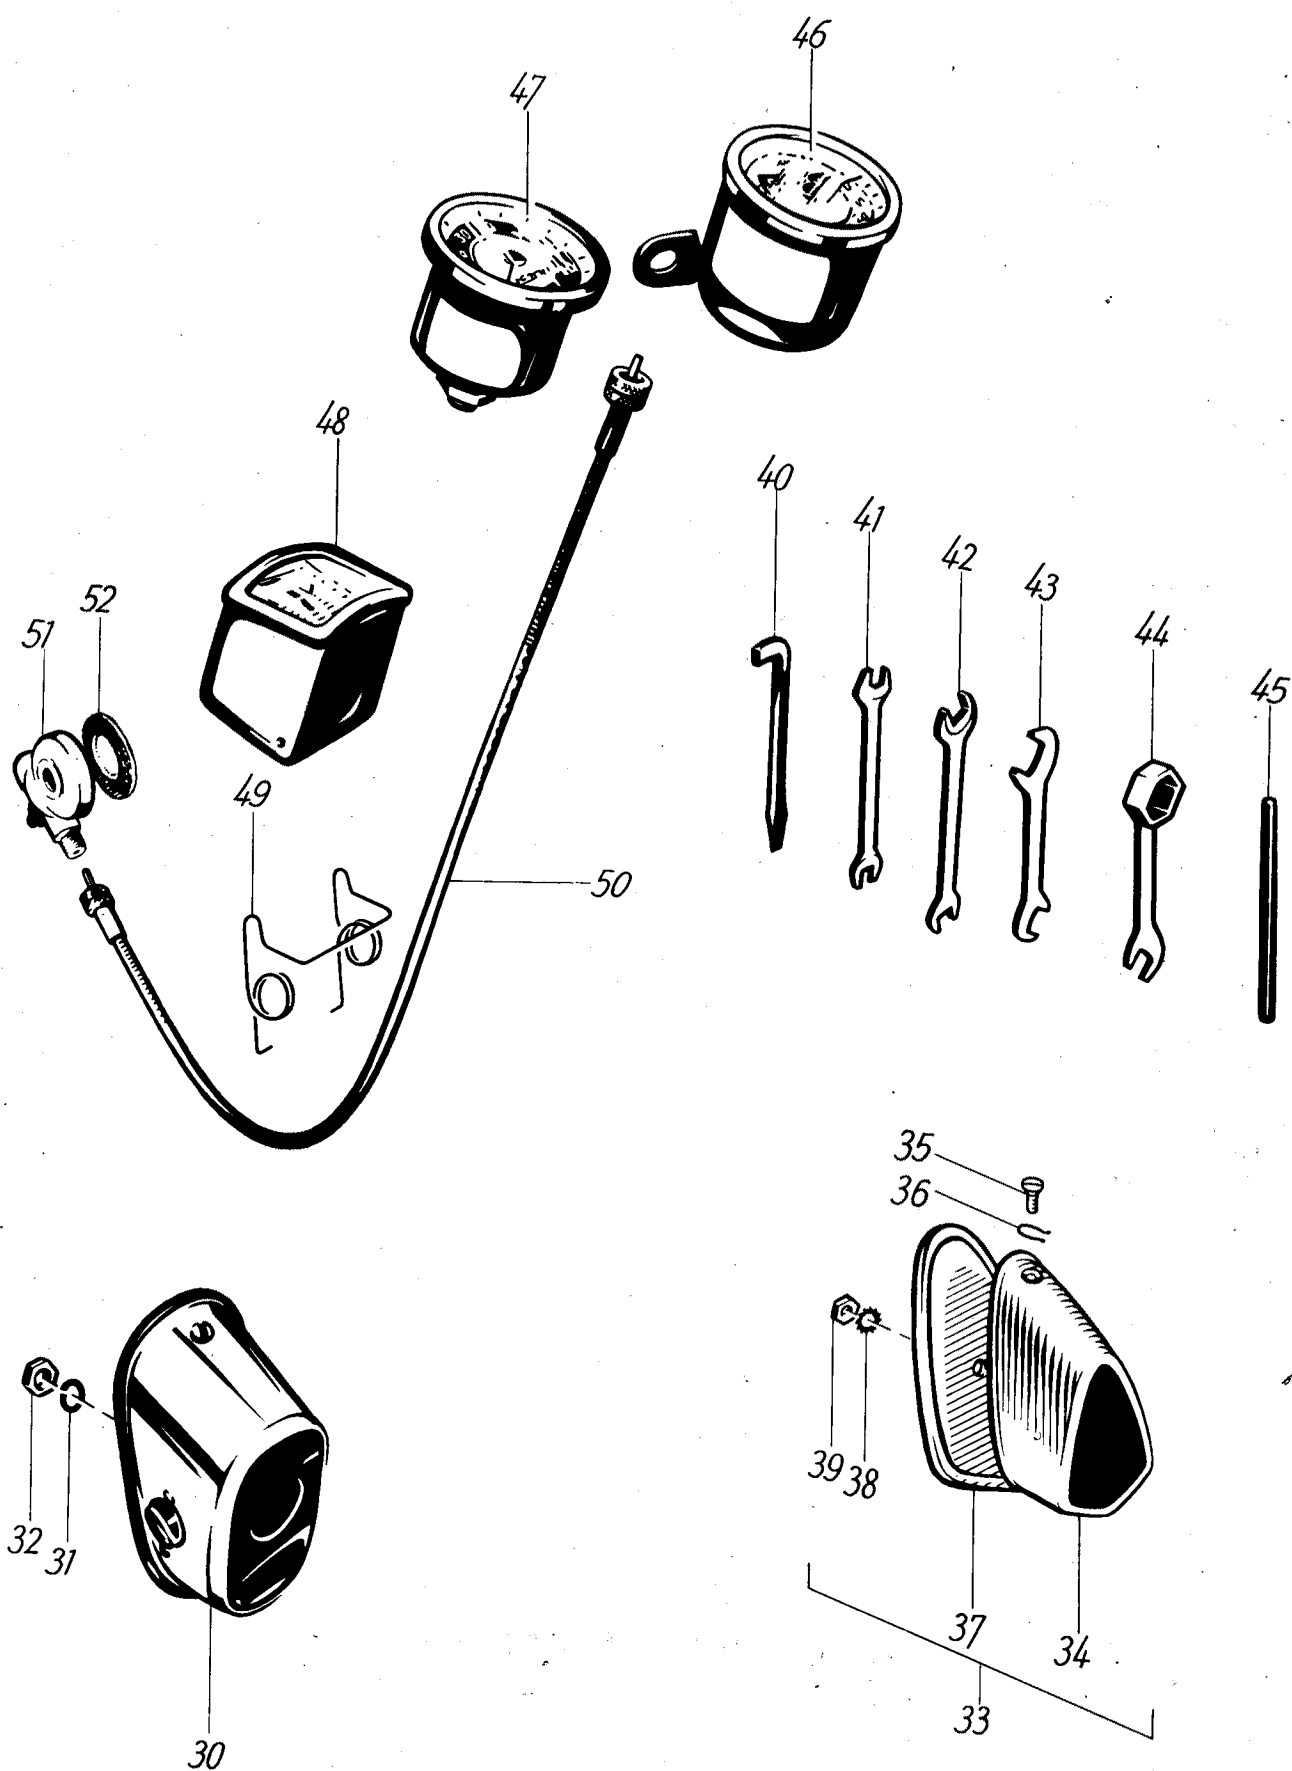

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY N-S				
Tail lamp (on numberplate)	16 81 00 512	1		—
Tail lamp (on mudguard)	16 81 00 508	1	Eire	33
Terminal screw	16 81 50 932	1		—
Screw for cap	16 81 50 900	1		35
Rubber plate	16 81 02 002	1		37
Lock washer	A 5,3 DIN 6798	1		38
Nut	M 5 DIN 934	1		39
Bulb	16 81 00 929	1	6 V 2,7 W	—
Cable harness	16 81 00 517	1	Engine-Headlamp L = 1070 mm Headlamp-Tail lamp L = 2000 mm	—
Protective sleeve	16 81 00 006	1	L = 400 mm	—
Tool box	—	—	s. page 37, Illustr. No. 4	—
Tools	16 91 00 900	1		—
Screwdriver	16 91 00 003	1		40
Spanner	11 91 00 600	1	8x9 mm	41
Spanner	11 91 00 601	1	10x11 mm	42
Spanner	16 91 00 004	1		43
Plug spanner	16 91 00 002	1		44
Tommy bar	16 91 00 005	1	7 mm Ø L = 118 mm	45
Speedometer head M. P. H.	16 92 00 505	1	80 700/86 472 → → 281 717/299 049	47
			for vehicles prior to 80 700/86 472 oder also handlebar support 16 41 01 046 2 Screws 8x45 DIN 931 and 4 Lock washers A 8,4 DIN 6798	
Speedometer head M. P. H.	16 92 02 505	1	281 718/299 050 →	48
Bracket	16 92 00 001	1		49
Flexible drive	16 92 02 502	1		50
Speedometer drive	16 92 00 503	1	→ 482 754/522 989	—
Speedometer drive	16 92 01 503	1	482 755/522 990 →	51
Felt washer for speedometer drive	16 92 00 905	1		52



Description	Order-No.	Quantity	Remarks	Illustr.-No.
		QUICKLY-L	in earlier vehicles than 548 011/593 741 Mudguard 16 31 00 532, 2 Bolts 4x8 DIN 85 2 washers 4,3 DIN 125, 2 Spg. washers A 4 DIN 137 and 2 Nuts M 4 DIN 934 should be ordered with this part → 651 958 / 701 432	
Frame	16 31 01 901	1		1
Head race	023 103 927	2		2
Filter body	16 31 00 019	1		3
Seal ring	16 31 00 070	1		4
Socket	16 31 00 020	1		5
Rubber plug	16 31 00 038	2		6
Maskin	16 31 00 073	1		7
Name plate	16 31 00 900	1	{ not supplied without stamped number	8
Grooved stud	2x3 DIN 1476	2		9
Handle	16 93 02 007	1		10
Frame back part	16 31 00 530	1		11
Frame back part	16 31 00 531	1	for Eire	—
Luggage strip	16 31 00 516	2		12
Spring washer	B 4 DIN 137	8		13
Nut	M 4 DIN 934	4		14
Medal	16 31 00 066	1		15
Distanc rubber	16 41 00 087	8	{ 2 for Medal 2 for Name plate	16
Name plate „Quickly“	16 31 00 071	2		17
Mudguard	16 31 00 532	1		—
Screw	4x8 DIN 85	2		—
Washer	4,3 DIN 125	2		—
Spring washer	A 4 DIN 137	2	only for repair	—
Nut	M 4 DIN 934	2		—
Bracket, top	16 31 00 086	1		—
Bracket, bottom	16 31 00 087	1		—
Bolt	M 5x10 DIN 85	4		—
Spring ring	B 5 DIN 127	4		—
Nut	M 5 DIN 934	4		—
Bracket	16 31 00 086	1		—
Screw	M 5x10 DIN 85	2		—
Spring ring	B 5 DIN 127	2		—
Nut	M 5 DIN 934	2		—
Rubber moulding	16 31 00 058	1		18
Clamp	16 31 00 078	2		19
Screw	16 31 00 062	1		20
Spring washer	B 7 DIN 137	1		21
Bolt	AM 6x20 DIN 85	2		22
Washer	16 31 00 091	2		23
Distance piece	16 31 00 061	2		24
Spring washer	B 6 DIN 137	2		25
Nut	M 6 DIN 985	2		26
Bolt	M 6x16 DIN 933	2		27
Washer	6,4 DIN 125	2		28
Lock washer	A 6,4 DIN 6798	2		29
Nut	M 6 DIN 934	2		30
Seal ring	16 31 00 076	1	18x36x5 mm	31
Plug	16 31 00 079	1		32
Strap for luggage carrier	—	—	s. page 68, Illustr. No. 41	—
Number plate rear	16 34 00 019	1		—
Bolt	M 5x10 DIN 85	1		—
Bolt	M 5x8 DIN 85	1		—
Spring washer	A 5 DIN 137	4		—
Nut	M 5 DIN 934	1		—
Nut	16 52 00 045	1		—
Number plate rear	083 834 017	1		—
Spacer bush	16 31 00 089	1		—
Bolt	M 5x15 DIN 85	1		—
Bolt	M 5x10 DIN 85	1	for Eire	—
Spring washer	A 5 DIN 137	4		—
Nut	M 5 DIN 934	2		—

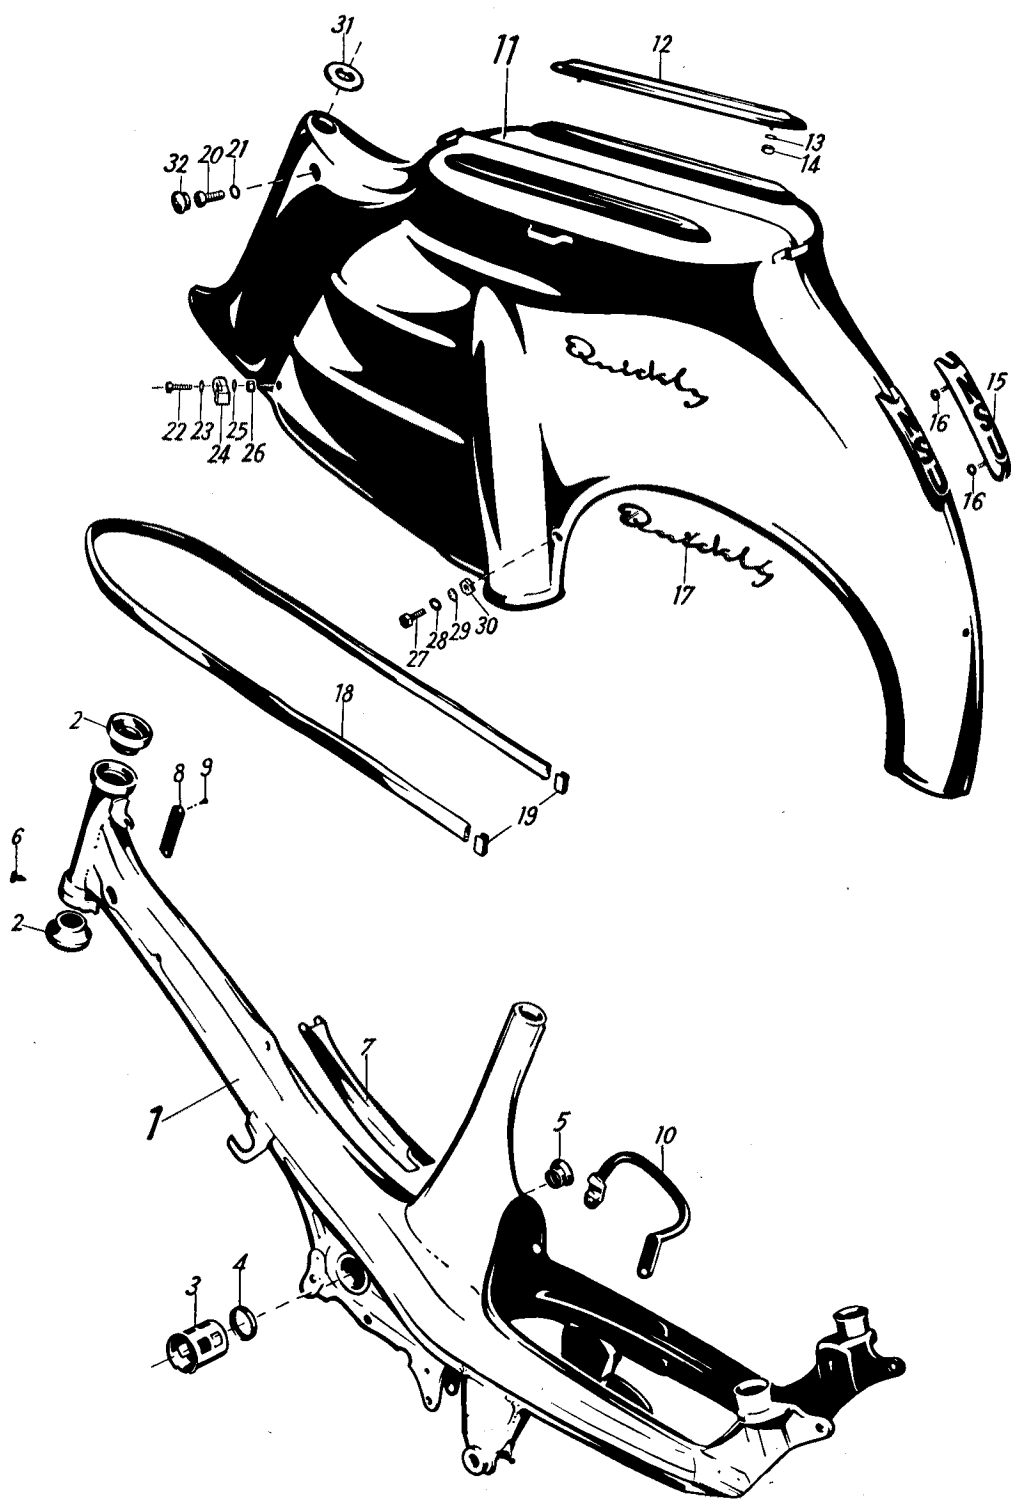

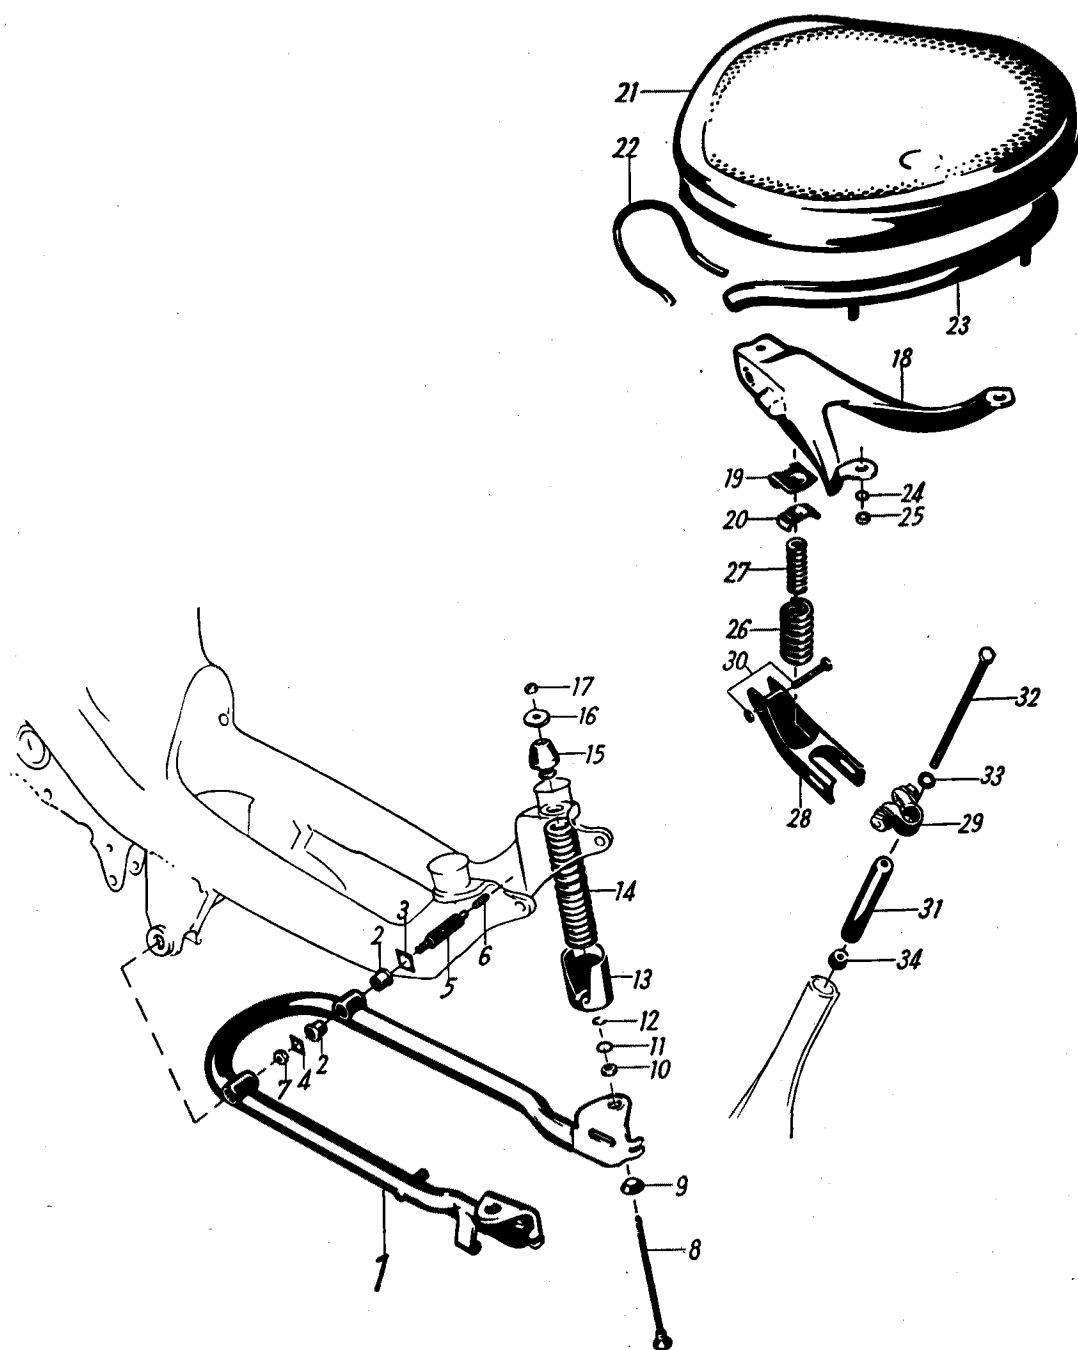


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
Swinging fork	16 32 00 502	1	} 676 332 / 721 207 → Collar 1,4 mm	1
Bush	16 32 00 008	4		2
Shim	16 32 00 016	as req.	} → 676 331 / 721 206	3
Shim	16 32 00 017	as req.		4
Bolt	16 32 00 504	2		5
Grease nipple	D 6 DIN 3402	2		6
Nut	16 41 00 050	2		7
Rod	16 32 00 506	2		8
Slide	16 32 00 027	2		9
Spring washer	16 32 00 030	2		10
Spring washer	16 32 00 022	2		11
Circlip	7 DIN 6799	2		12
Cap for spring, left	16 32 00 012	1		—
Cap for spring, right	16 32 00 019	1		13
Spring	16 41 04 010	2		14
Shock absorber	16 32 00 509	2		15
Threaded washer	16 32 00 029	2		16
Nut	M 5 DIN 934	2		17
Saddle	16 38 02 501	1		—
Saddle top	16 38 01 913	1		18
Adjuster w/washers	16 38 00 907	1		—
Guide	16 38 01 906	1		19
Spring seal	16 38 00 911	1		20
Cover	16 38 01 905	1		21
Tension bracket	16 38 00 917	1		22
Bracket	16 38 01 914	2		23
Lock washer	A 7,4 DIN 6798	2		24
Nut	BM 7 DIN 439	2		25
Saddle spring, outer	16 38 00 902	1		26
Saddle spring, inner	16 38 00 903	1		27
Saddle base	16 38 01 915	1		28
Clip, compl.	16 38 01 904	1		29
Bolt and Nut	16 38 00 916	1		30
Seat tube	16 38 00 901	1		—
Seat tube	16 38 01 019	1	not supplied	31
Clamp bolt	534 080 054	1		32
Washer	8,4 DIN 125	1		33
Nut	534 080 055	1		34





Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
Stand	16 35 01 503	1		1
Bush	16 35 00 013	2		2
Tube	16 35 01 504	1		3
Washer	16 35 00 010	1		4
Split pin	3x18 DIN 94	1		5
Side support	16 93 01 509	1		—
Shell case	16 93 01 507	1		6
Double spring washer	16 93 00 042	1		7
Washer	16 93 00 045	1		8
Split pin	3x22 DIN 94	1		9
Rubber plug	16 93 00 044	1		10
Bolt for fastening	16 93 00 058	1		—
Spring, front	16 93 00 059	1		11
Spring, rear	16 93 00 060	1		12
Spring washer	B 6 DIN 137	2		13
Screw	M 6x10 DIN 933	1		14
Screw	M 6x12 DIN 933	1		15
Lock washer	6,4 DIN 6798	1		16
Front mudguard	16 33 04 504	1		17
Front mudguard	16 33 03 505	1	for Eire	—
Bracket	123 109 912	2		—
Spring washer	A 6 DIN 137	4		—
Screw	M 6x6 DIN 933	2		—
Number plate, front	16 33 00 010	1		—
Screw	M 5x10 DIN 85	1		—
Spring washer	A 5 DIN 137	2		—
Nut	M 5 DIN 934	1		—
Number plate, front	028 104 762	1		—
Screw	M 5x10 DIN 85	2	} for Eire	—
Spring washer	A 5 DIN 137	4		—
Nut	M 5 DIN 934	2		—
NSU emblem	533 085 385	1		18
Spring washer	A 4 DIN 137	2		19
Nut	M 4 DIN 934	1		20
Rubber sleeve	16 93 00 057	2		21
Screw	M 6x12 DIN 933	1		22
Lock washer	A 6,4 DIN 6798	1		23



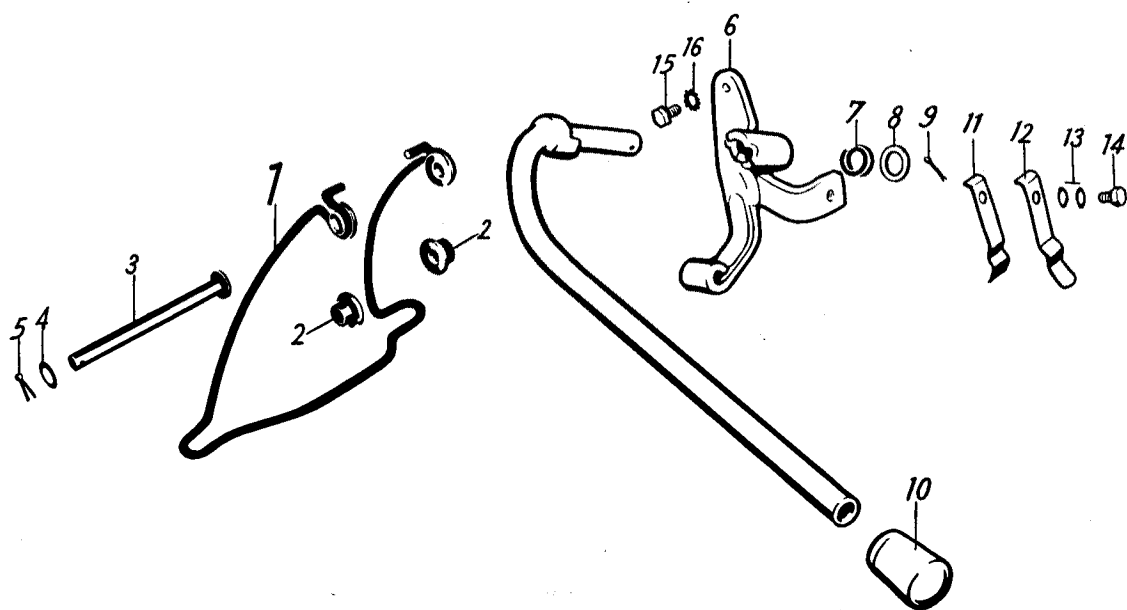
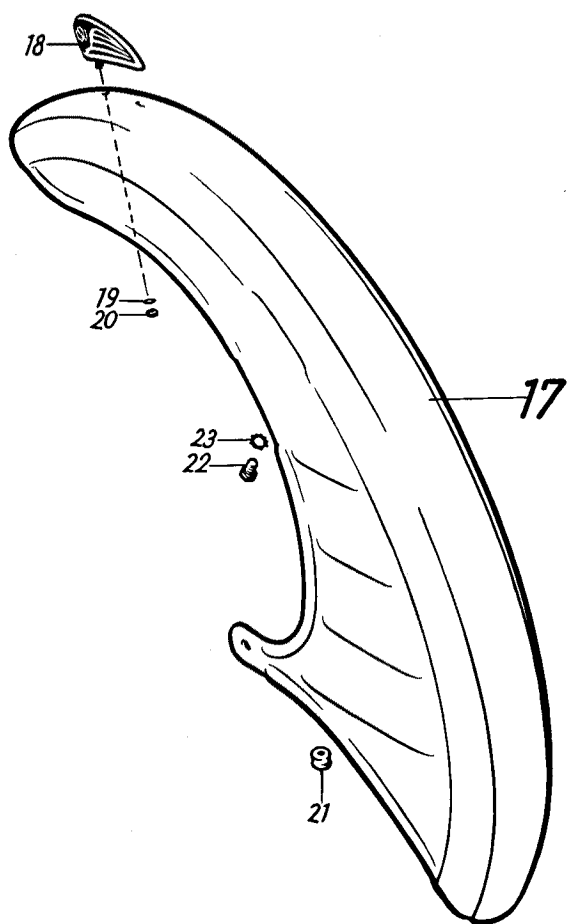


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
1 2				
Spring fork	16 41 04 900	1		1
Spring fork	16 41 03 901	1		2
Cone	044 412 131	1		3
Swinging link	16 41 02 508	each 1		4
Bush	16 41 01 056	each 2		5
Cap, inner	16 41 00 081	each 2		6
Grease nipple	D 6 DIN 3402	each 1		7
Spring washer	A 8 DIN 137	2		8
Screw	16 41 00 045	2		9
Spring	16 41 04 010	2		10
Rubber plug	16 41 01 088	2		11
Bolt	16 41 00 054	2	8 mm diam	12
Cap outer	16 41 00 080	each 2		13
Bush	16 41 00 055	2	8x12x19 mm	14
Nut	16 41 00 050	2		15
Stop	16 41 00 515	2		16
Cover plate, left	16 41 00 089	1		—
Cover plate, right	16 41 00 090	1		17
Bolt	M 6x36 DIN 931	2		18
Lock washer	11 53 00 002	2		19
Nut	M 6 DIN 934	2		20
Cover for tool box	16 73 01 901	1		21
Escutcheon	16 41 00 064	1		22
Spring washer	A 3 DIN 137	1		23
Rivet	3x6 DIN 660	1		24
Spring washer	A 5 DIN 137	1		25
Knurled screw	16 73 00 004	1		26
Name plate	16 41 00 083	1		27
Rubber spacer	16 41 00 087	1		28
Lock with key	16 41 00 513	1		30
Parts for steering head bearing				
Ball, top and bottom	024 049 962	each 21	5 mm diam	31
Cone, top	024 103 928	1		32
Cover	024 103 929	1		33
Nut	074 742 006	1		34
Washer	16 41 00 086	1		35
Threaded ring	16 41 00 091	1		36
Nut	16 41 00 516	1	} not supplied, order nut 16 41 02 048 and lockplate 16 43 00 047	37
Lock plate	16 43 00 047	1		37a
Nut	16 41 02 048	1		37b
Screw	M 8x18 DIN 933	2		38
Lock washer	A 8,4 DIN 6798	2		39

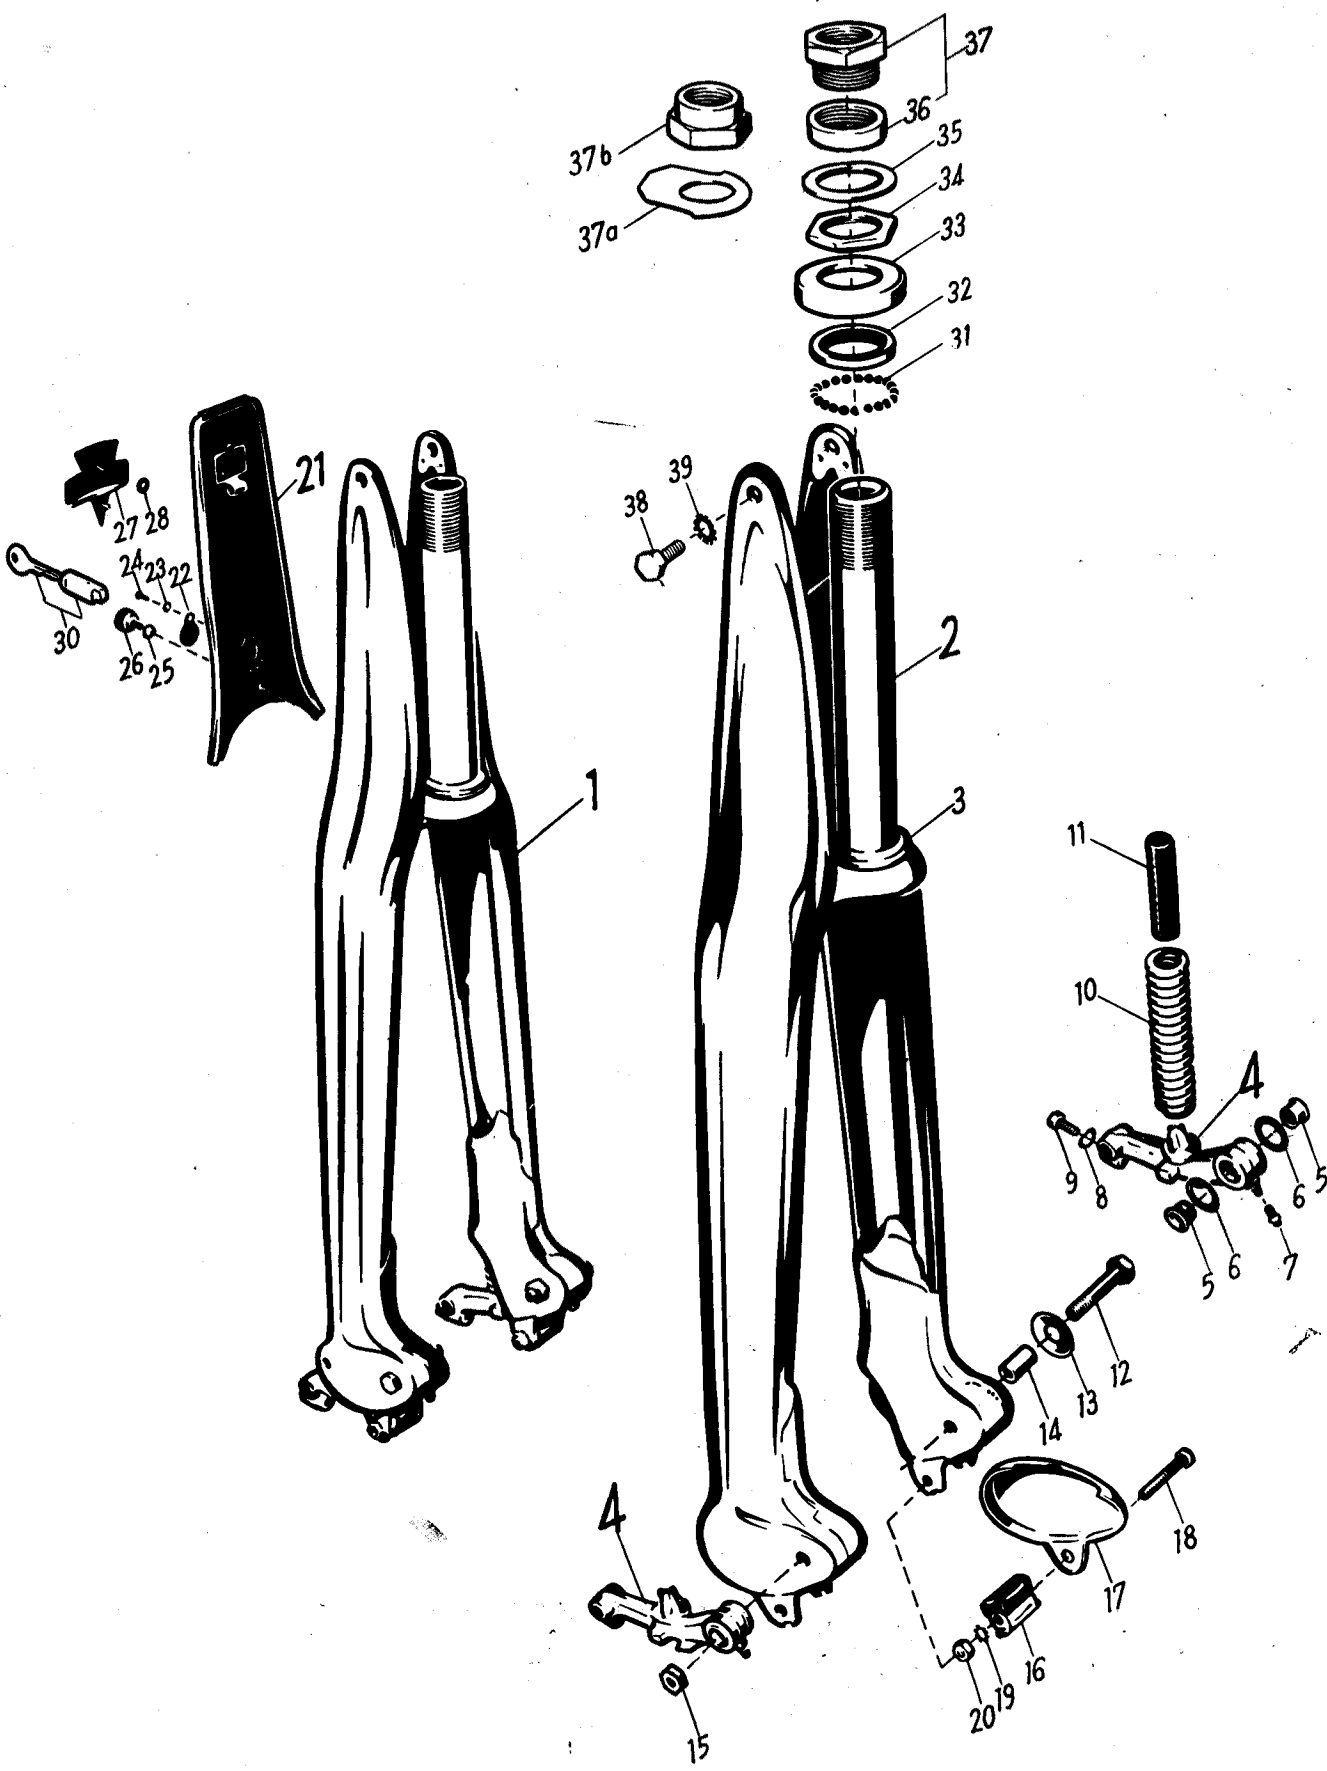


Description	Order-No.	Quantity	Remarks	Illustr.-No.
	1 2 3 4 5		QUICKLY-L	
Handlebar assy	16 43 00 515	1	2 Gears	—
Handlebar assy	16 43 01 515	1	{ 3 gears alternatively with 2 gears 640 513 / 688 454 →	—
Handlebar	16 43 01 521	1		1
Switch	16 43 00 510	1		—
Insulating plate	16 81 00 933	1		2
Contact plate	16 81 02 924	1		3
Switch lever	16 81 02 905	1		4
Contact bridge	16 81 01 906	1		5
Spring	16 81 01 907	1		6
Washer	16 81 01 908	1		7
Split pin	1x12 DIN 94	1		8
Angle	16 43 00 003	1		9
Spring washer	A 4 DIN 137	1		10
Knurled screw	16 81 00 911	1		11
Brake lever	16 43 00 519	1		12
Bush	19 43 00 009	1		13
Washer	041 404 134	1		14
Cup spring	19 43 00 010	1		15
Screw	M 5x18 DIN 933	1		16
Rubber plate right-hand	19 43 00 020	1		17
Throttle twistgrip	16 43 00 522	1		—
Twistgrip housing	16 44 03 900	1		19
Stop screw	16 44 01 922	1		—
Nut	BM 5 DIN 439	1		—
Screw	074 743 606	1		20
Grup screw	11 44 00 910	1		21
Slider	024 106 412	1		26
Washer	16 44 01 921	1		27
Twistgrip sleeve	16 44 02 901	1		28
Rubber grip	16 44 02 904	1		—
Rubber plate left-hand	16 43 00 038	1		29

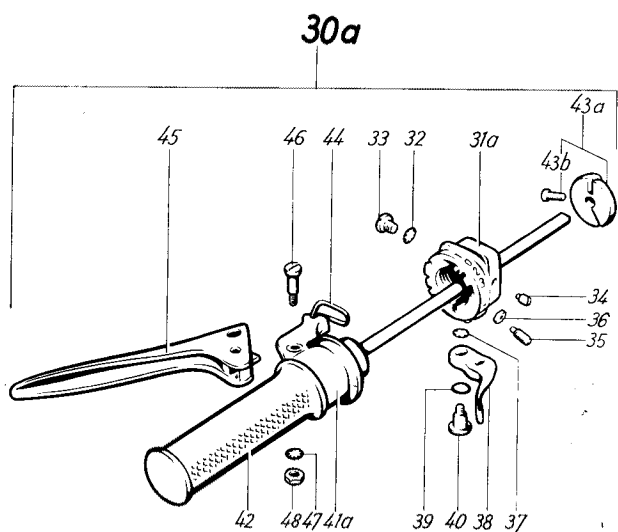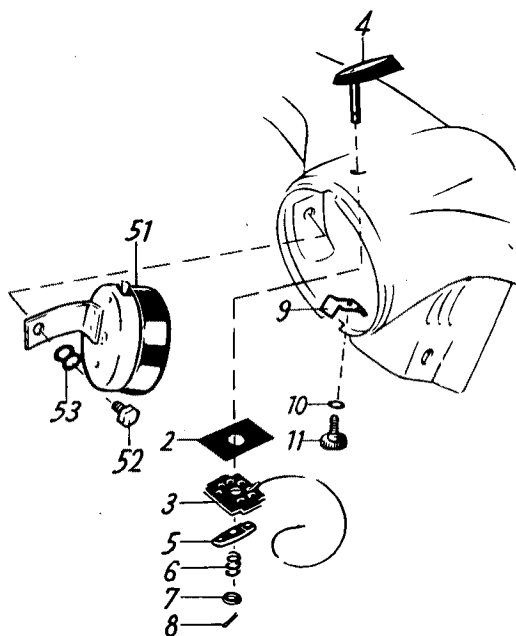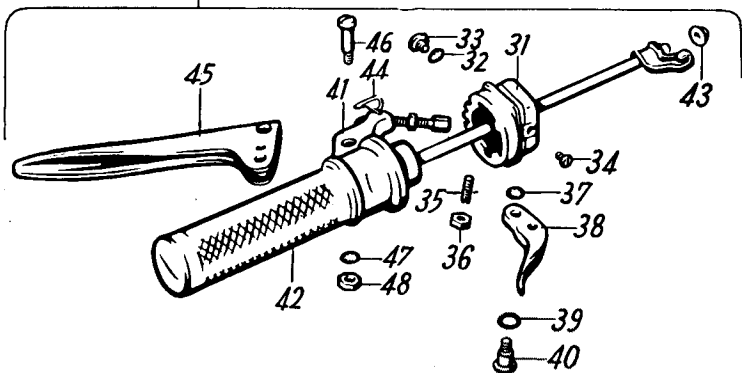
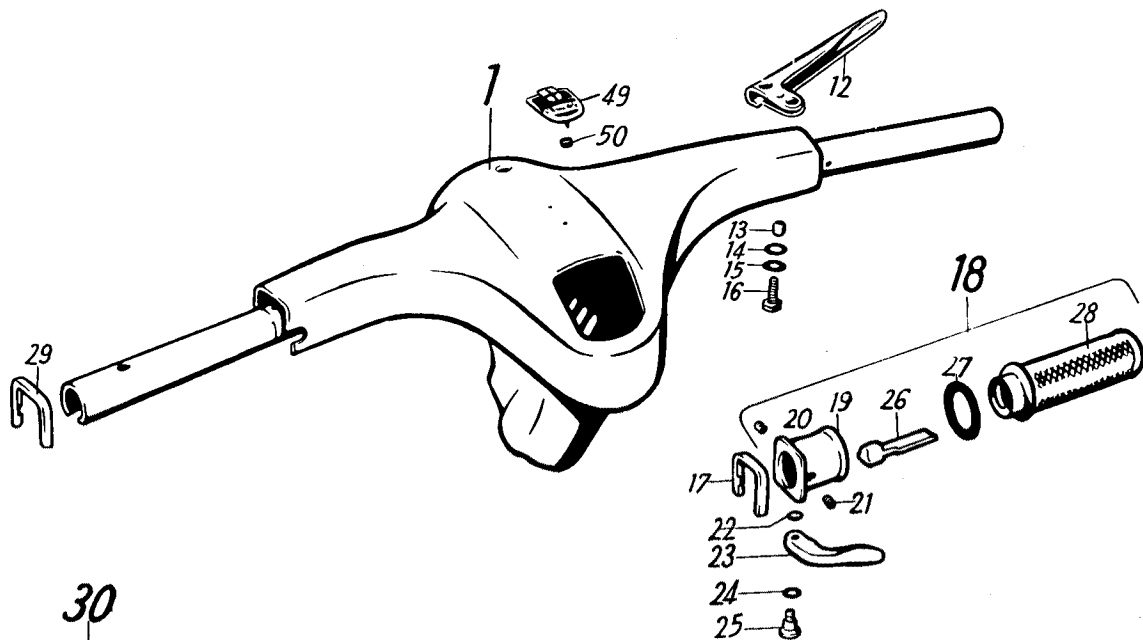


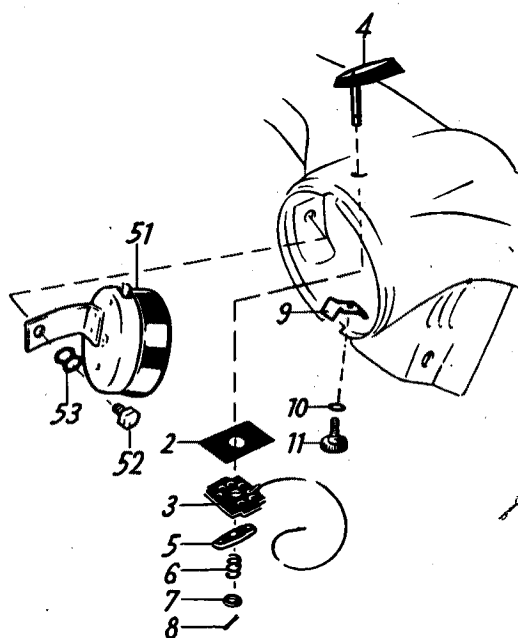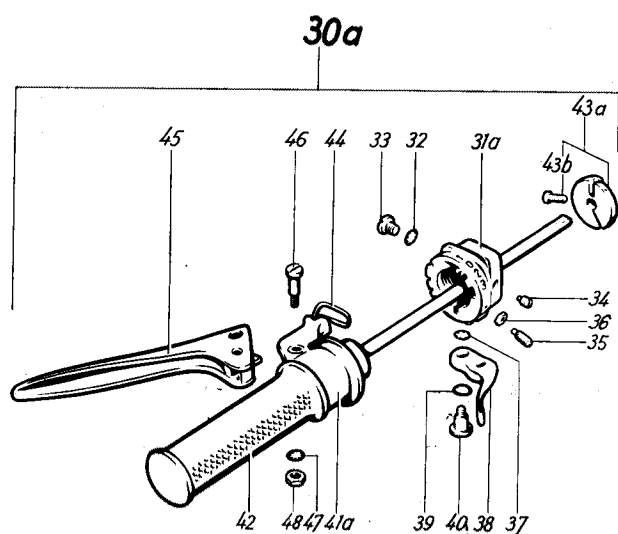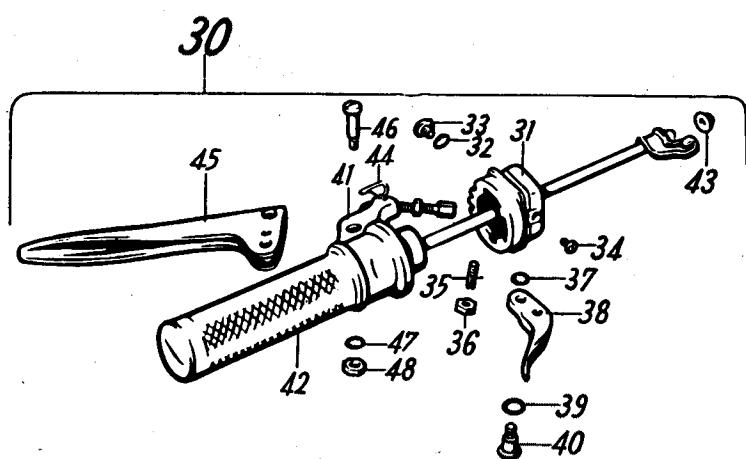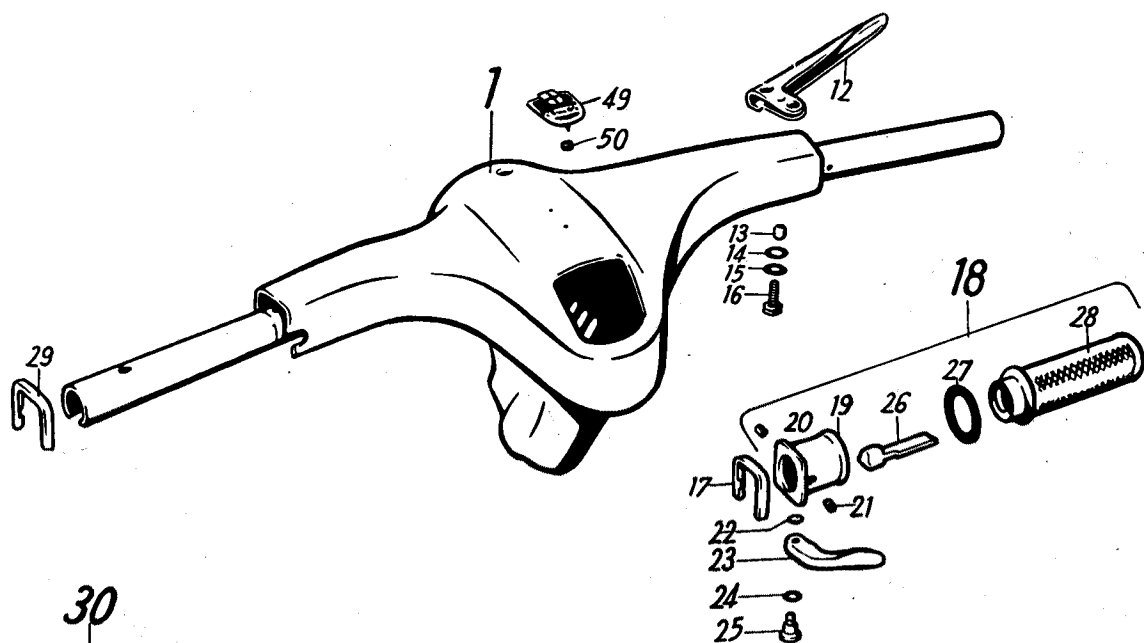

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
	1 2 3 4 5 6			
Gear change twistgrip	16 43 00 514	1	2 Gears	30
Gear change twistgrip	16 43 01 514	1	3 Gears	30a
Twistgrip housing	16 44 02 905	1		31
Twistgrip housing	16 44 03 905	1		31a
Lock washer	J 6,4 DIN 6797	1		32
Screw	AM 6x6 DIN 85	1		33
Screw	11 44 00 910	1		34
Screw	16 44 00 925	1		35
Nut	BM 5 DIN 439	1		36
Lock washer	J 5,3 DIN 6797	1		37
Lever	16 44 01 909	1		38
Spring washer	16 44 01 923	1		39
Screw	M 5x8 DIN 923	1		40
Twistgrip sleeve	16 44 02 906	1		41
Twistgrip sleeve	16 44 03 906	1		41a
Rubber grip	16 44 01 904	1		42
Bush	16 43 00 032	1		43
Spacer	16 44 00 926	1		43a
Screw	16 44 00 927	1		43b
Stirrup	16 44 00 910	1		44
Lever	16 44 01 907	1		45
Bolt	16 44 00 908	1		46
Lock washer	J 5,3 DIN 6797	1		47
Nut	M 5 DIN 934	1		48
Cover plate	16 43 00 035	1		49
Rubber spacer	16 41 00 087	2		50
Rattle	16 81 01 506	1		—
Lead	16 81 00 003	1	L = 250 mm	—
Screw	M 6x8 DIN 933	1		52
Spring washer	B 6 DIN 137	2		53
Cover for speedometer locating hole	16 43 00 520	1		—

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
Dekompressor cable	16 44 02 504	1		1
Nipple	16 44 00 511	1		2
Clutch cable	16 44 01 502	1		3
Nipple seat	16 44 00 023	1		4
Cable adjuster	16 44 00 930	1		5
Nut	16 44 00 049	1		6
Gear change cable	16 44 03 503	1	} 2 Gears	7
Sleeve	16 44 01 002	1		8
Gear change cable	16 44 04 503	1	} 3 Gears	—
Nipple	16 44 00 056	2		—
Front brake cable	16 44 03 501	1		9
Nipple seat	16 44 00 023	1		10
Cable adjuster	19 44 00 014	1		11
Nut	19 44 00 013	1		12
Rubber sleeve	16 44 01 003	1	L = 48 mm	—
Throttle cable	16 44 02 509	1		13
Throttle cable	16 44 00 518	1	for starting carburettor	—
Rubber sleeve	16 44 00 025	1		14
Rubber cap	16 44 00 040	1	} s. page 43, Illustr. No. 17-20 L = 510 mm	—
Rubber sleeve	16 44 01 001	1		—
Protecting sleeve	16 44 00 039	1		—
Rubber sleeve	16 44 00 042	1		—
Rubber cable strap	16 44 00 041	2	2 Gears	—
Rubber cable strap	16 44 01 041	2	3 Gears } optional	—
Rear brake cable	—	—	s. page 65, Illustr. No. 1-8	—

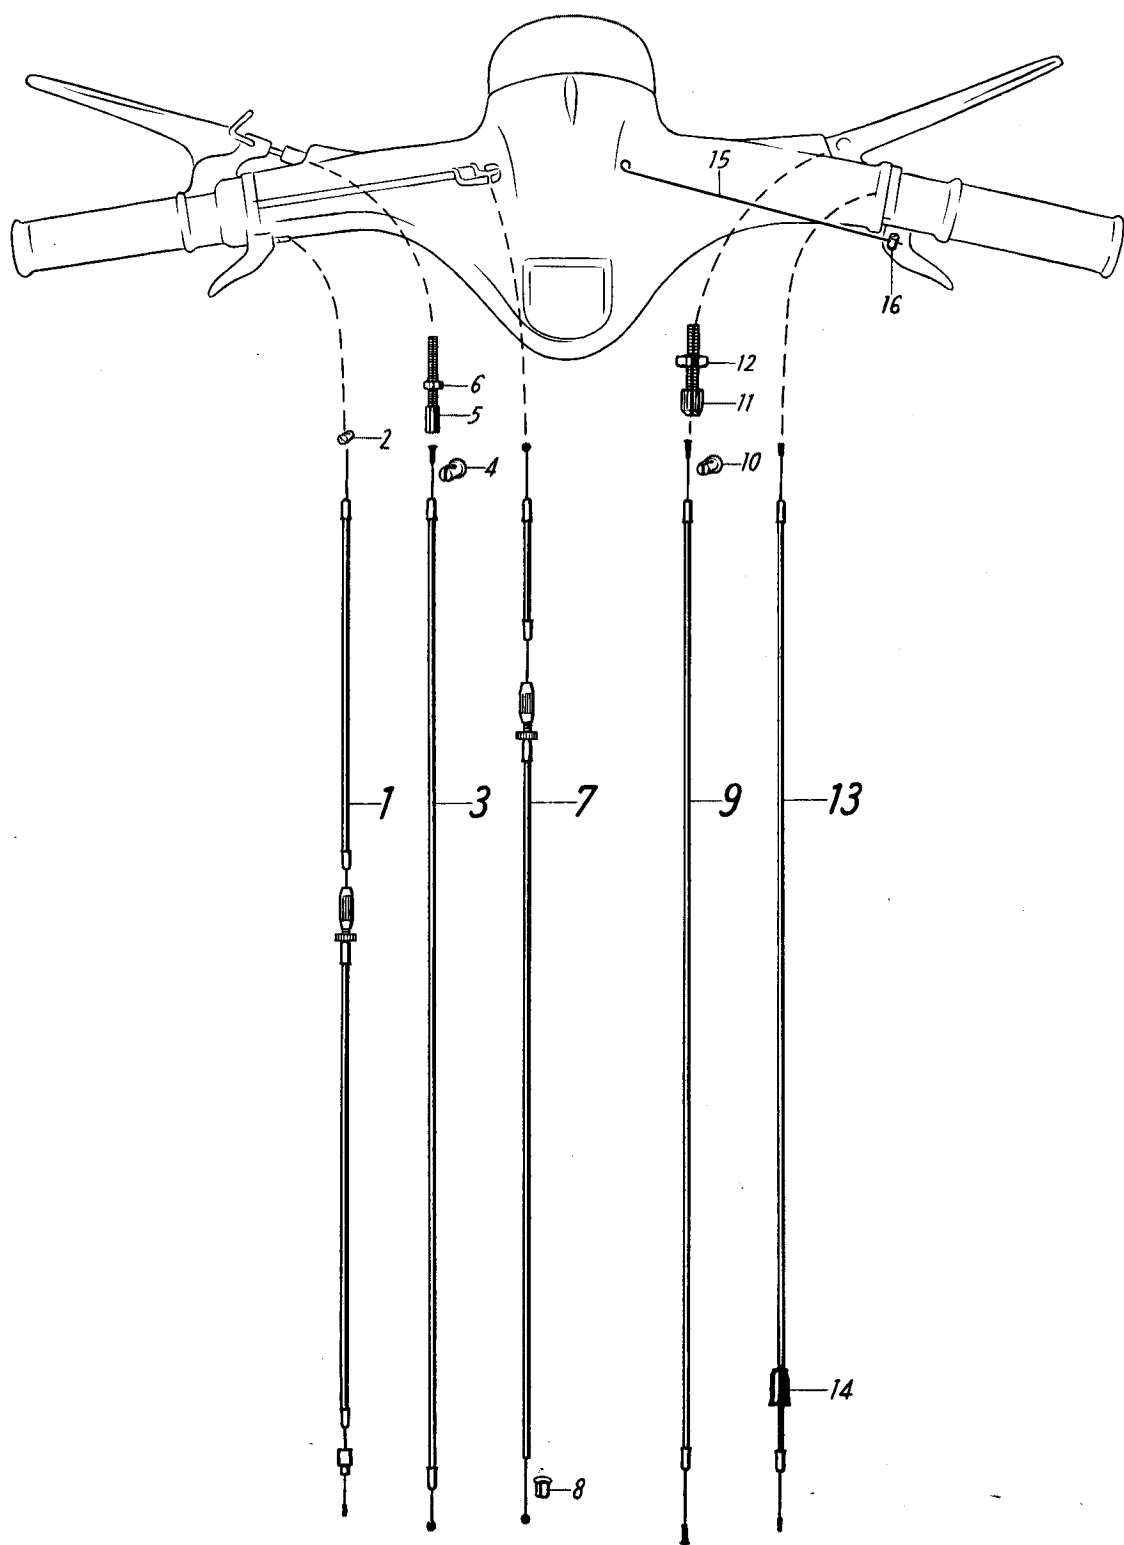

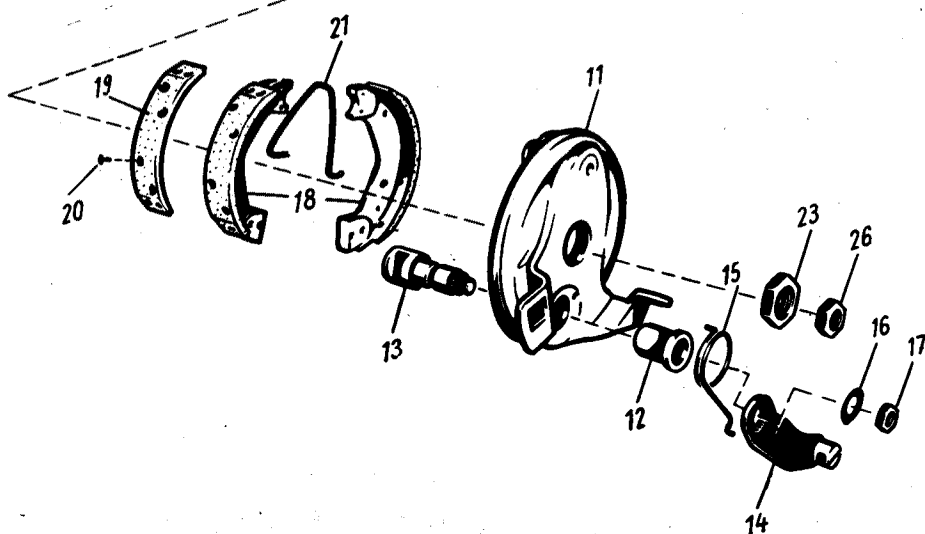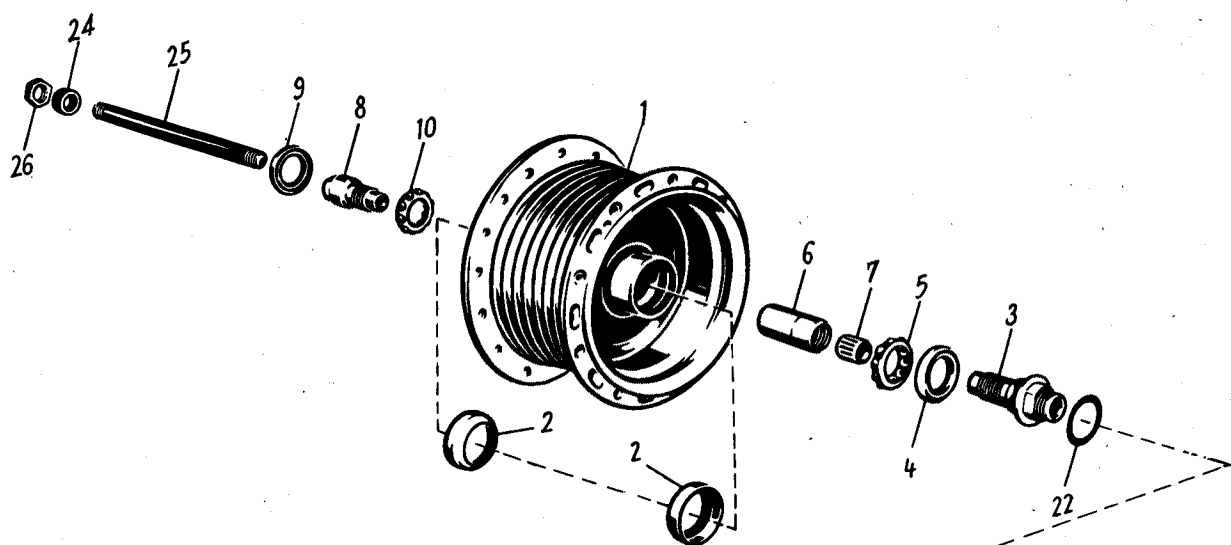



Description	Order-No.	Quantity	Remarks	Illustr.-No.
1 2 3 4 QUICKLY-L				
Front wheel	16 51 02 517	1		—
Front wheel without brake	16 51 02 518	1		—
Rim (chrome)	16 52 00 036	1	chromium plated	—
Rim	16 52 00 038	1		—
Spoke	16 52 00 055	36	L = 233 mm	—
Nipple	075 751 603	36		—
Front wheel hub	16 51 04 507	1		—
Hub	16 51 03 900	1		1
Ball race	16 51 00 023	2		2
Cone	16 52 01 015	1		3
Seal ring	16 51 00 045	1	18x30,2x5 mm	4
Ball cage	16 51 00 044	1	1/4" diam	5
Spacer	16 52 02 017	1		6
Tolerance ring	16 52 00 037	1		7
Cone	16 52 01 016	1		8
Seal ring	16 51 00 045	1	18x30,2x5 mm	9
Ball cage	16 51 00 044	1	1/4" diam	10
Front brake	16 51 02 511	1		—
Brake plate	16 51 04 503	1		11
Bush	16 52 03 026	1	12x15x19 mm	12
Brake operating com	16 51 03 027	1		13
Brake lever	16 51 01 502	1		14
Spring	16 51 01 035	1		15
Spring washer	B 7 DIN 137	1		16
Nut	16 52 01 043	1		17
Brake shoe	16 51 02 509	1		18
Lining	16 52 01 034	2		19
Rivet	16 51 00 043	16		20
Spring	16 51 03 030	1		21
Shim	16 51 00 054	as req.	18,2x26x0,2; 0,3 mm	22
Shim	16 51 01 054	as req.	18,2x26x0,5 mm	—
Nut	16 51 00 025	1		23
Ring	16 51 02 017	1	10,2x15x9,2 mm	24
Spindle	16 51 02 028	1		25
Nut	16 51 00 036	2		26
Well filler	26—2.00	—	} not supplied	—
Inner tube	26—2.00	—		—
Tyre	26—2.00	—		—

Group 52
Rear wheel

NSU-Quickly (L)


Description	Order-No.	Quantity	Remarks	Illustr.-No.
1 2 3 4 QUICKLY-L				
Rear wheel	16 52 02 519	1		—
Rear wheel				
without brake	16 52 02 520	1		—
Rim (chrome)	16 52 00 036	1	chromium plated	—
Rim	16 52 00 038	1		—
Spoke	16 52 00 055	36	L = 233 mm	—
Nipple	075 751 601	36		—
Rear wheel hub	16 52 04 508	1		—
Hub	16 52 04 900	1		1
Ball race	16 51 00 023	2		2
Sprocket	16 52 03 005	1	36 No for teeth	3
Bolt	16 52 01 044	6		4
Spring ring	A 5 DIN 127	6		5
Nut	16 52 00 045	6		6
Cone	16 52 01 015	1		7
Seal ring	16 51 00 045	1	18x30,2x5 mm	8
Ball cage	16 51 00 044	1	1/4" diam	9
Spacer	16 52 02 017	1		10
Tolerance ring	16 52 00 037	1		11
Cone	16 52 01 016	1		12
Seal ring	16 51 00 045	1	18x30,2x5 mm	13
Ball cage	16 51 00 044	1	1/4" diam	14
Rear brake	16 52 03 509	1		—
Rear plate	16 52 02 518	1		15
Bush	16 52 03 026	1	12x15x19 mm	16
Spring	16 52 03 021	1		17
Brake operating cam	16 51 03 027	1		18
Brake lever	16 52 04 003	1		19
Spring washer	B 7 DIN 137	1		20
Nut	16 52 01 043	1		21
Brake shoe	16 51 02 509	2		22
Lining	16 52 01 034	2		23
Rivet	16 51 00 043	16		24
Spring	16 51 03 030	1		25
Cover	16 52 00 046	1		26
Shim	16 51 00 054	as req.	18,2x26x0,2; 0,3 mm	27
Shim	16 51 01 054	as req.	18,2x26x0,5 mm	—
Nut	16 52 00 049	1		28
Spacer	16 52 01 018	1	10,5 mm	29
Chain adjusting screw	16 52 00 011	2		30
Spring washer	B 6 DIN 137	2		31
Nut	M 6 DIN 934	2		32
Spindle	16 52 01 014	1		33
Nut	16 51 01 036	2		34
Well filler	26—2,00	—	} not supplied	—
Inner tube	26—2,00	—		—
Tyre	26—2,00	—		—

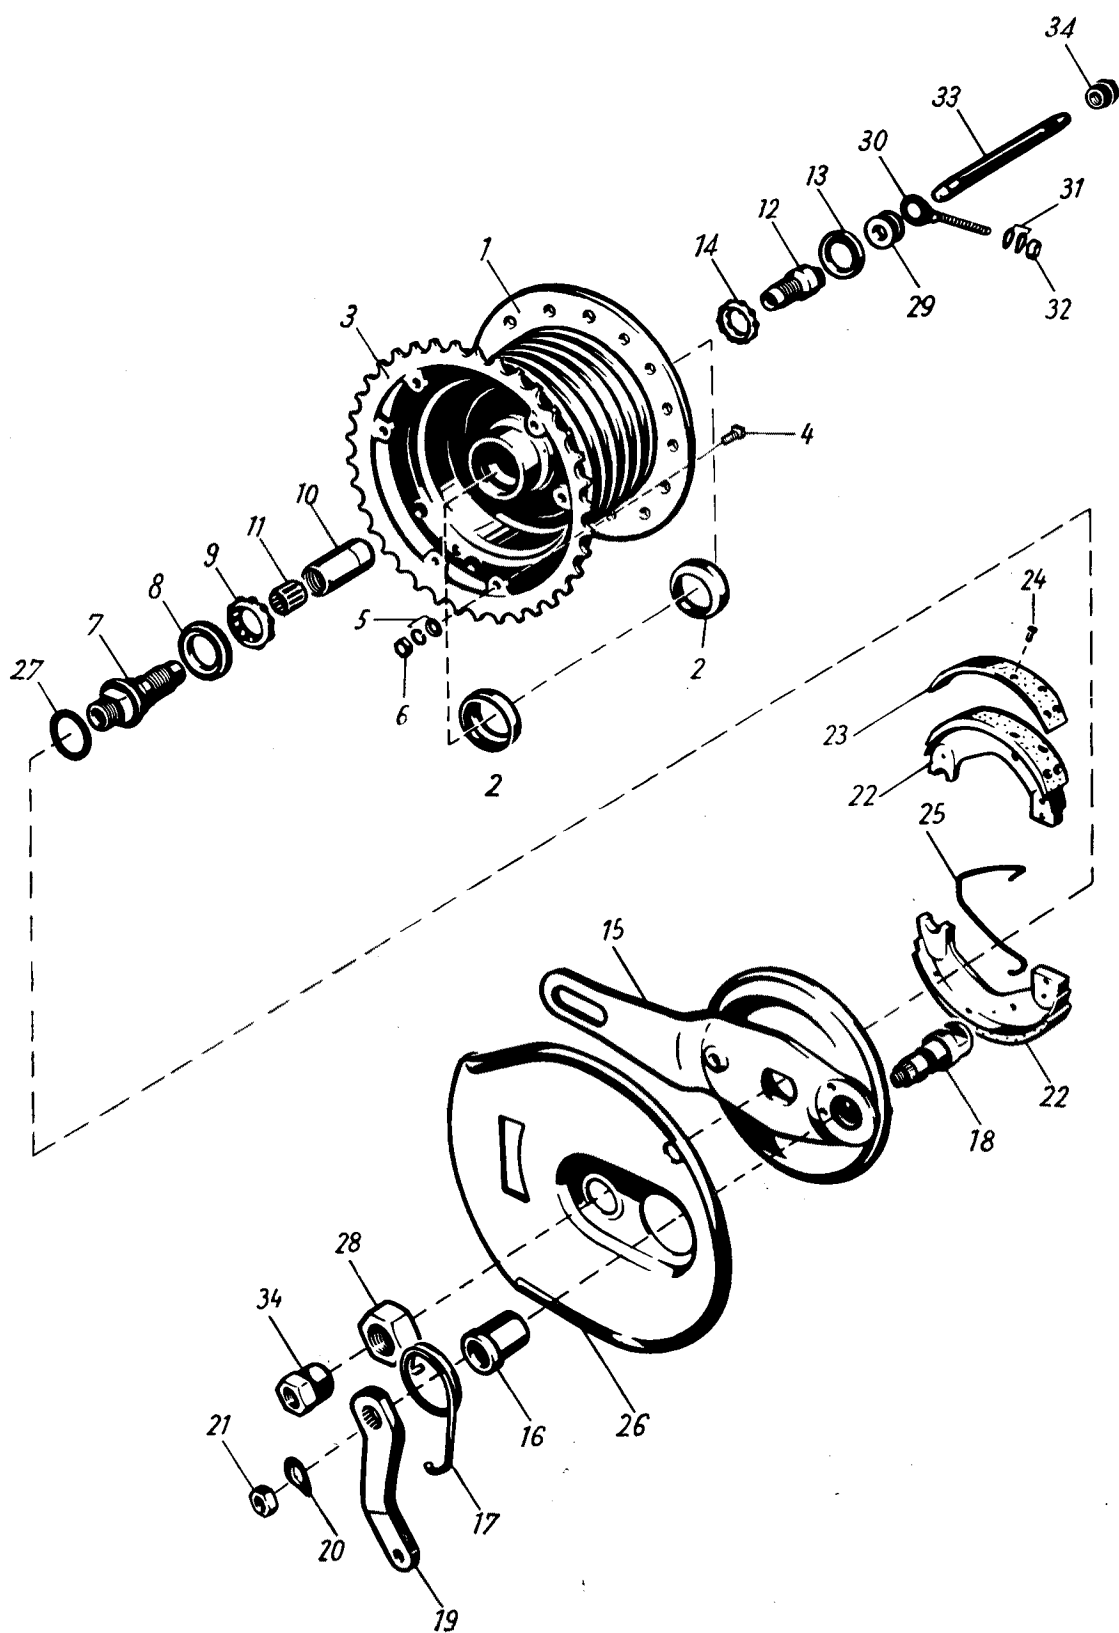


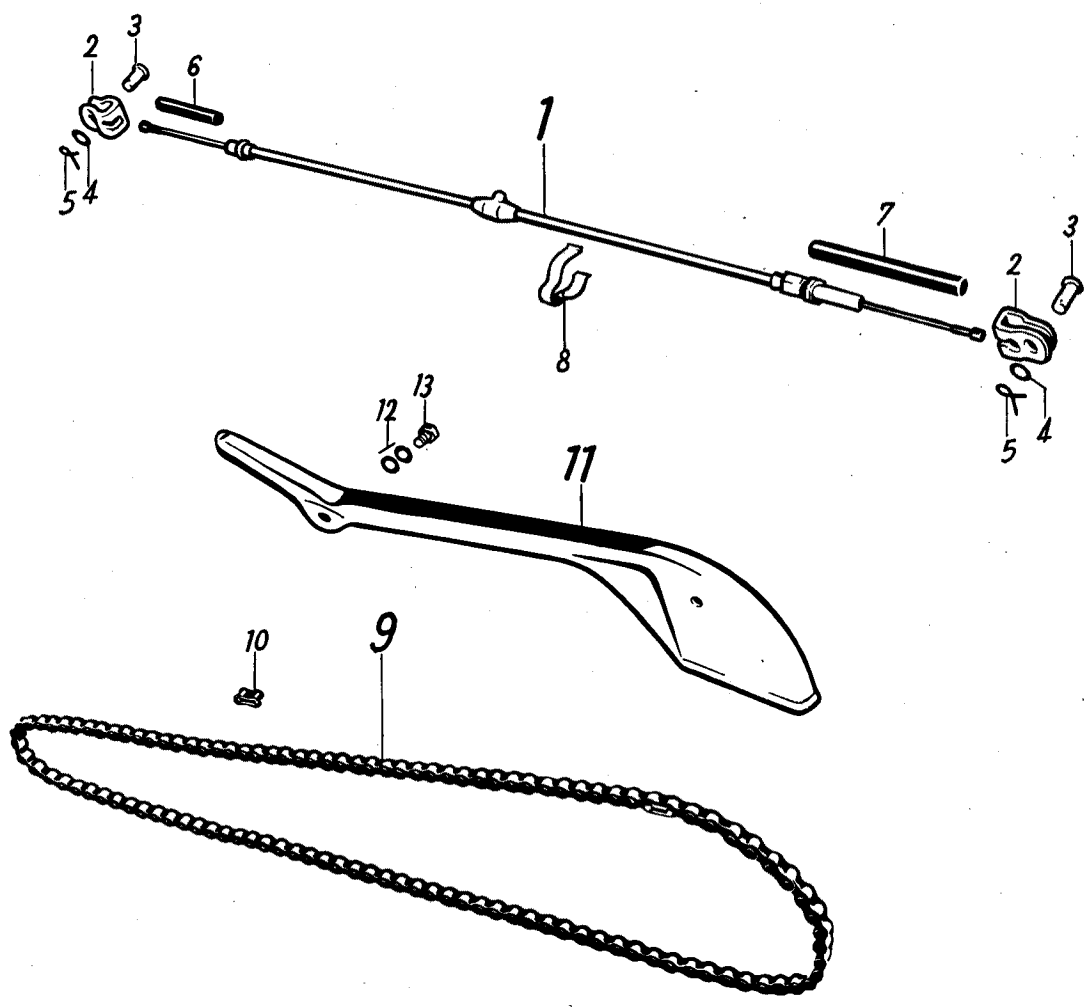

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
Rear brake cable	16 53 00 505	1		1
Clevis link	16 53 00 013	1		2
Bolt	16 53 00 010	2		3
Washer	11 53 00 002	2		4
Locking-spring	11 53 00 819	2		5
Hose, front	16 44 01 003	1		6
Hose rear	16 53 00 019	1		7
Clamp	59 252	1		8
Chain				
112 links	16 54 00 600	1	1 E 12,7x4,88 DIN 8180	9
Connecting link	16 54 01 601	1	1 E 12,7x4,88 DIN 8180	10
Cranked link double	16 54 00 603	1	1 C 12,7x4,88 DIN 8180	—
Chain guard	16 54 01 001	1		11
Spring washer	B 6 DIN 137	2		12
Screw	M 6x8 DIN 933	1		13






Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
Fuel tank	16 72 00 508	1		1
Emblem	16 72 01 035	2		—
Transfer	073 772 030	1		—
Filler cap	16 72 01 504	1		2
Gasket	16 72 00 024	1		3
Fuel tap	16 72 01 505	1		4
Strainer	16 72 00 905	1		5
Gasket	16 72 00 903	1		—
Nut	16 72 00 904	1		6
Gasket	16 72 00 901	1		7
Connector	16 72 00 900	1		8
Cap nut	16 72 00 902	1		9
Hose	033 109 155	1	L = 200 mm	10
Sleeve	023 104 269	2		11
Fuel tank attachment-fittings				
Rubber block	16 72 00 004	2		12
Rubber strip	16 72 00 032	2		—
Strap	16 72 01 003	1		13
Pad	16 72 01 007	1		14
Pin rear	16 72 01 010	1		15
Circlip	5 DIN 6799	1		—
Pin front	16 72 00 019	1		16
Bolt	16 72 00 033	1		17
Lock washer	A 5,3 DIN 6798	1		18
Nut	16 72 00 008	1		19
Exhaust pipe	16 71 02 005	1		20
Seal ring	16 71 00 002	2		21
Union	16 71 00 001	1		22
Silencer assy	16 71 03 502	1	L = 625 mm	23
Silencer	16 71 02 505	1		24
Baffle	16 71 01 009	1		25
Lock washer	J 4,3 DIN 6798	1		26
Screw	M 4x8 DIN 86	1		27
Silencer bracket	16 71 03 008	1		28
Screw	M 6x15 DIN 933	1		29
Spring washer	B 6 DIN 137	2		30
Clip	16 71 00 006	1		31
Bolt	M 5x18 DIN 933	1		32
Spring washer	A 5 DIN 137	2		33
Nut	M 5 DIN 934	1		34

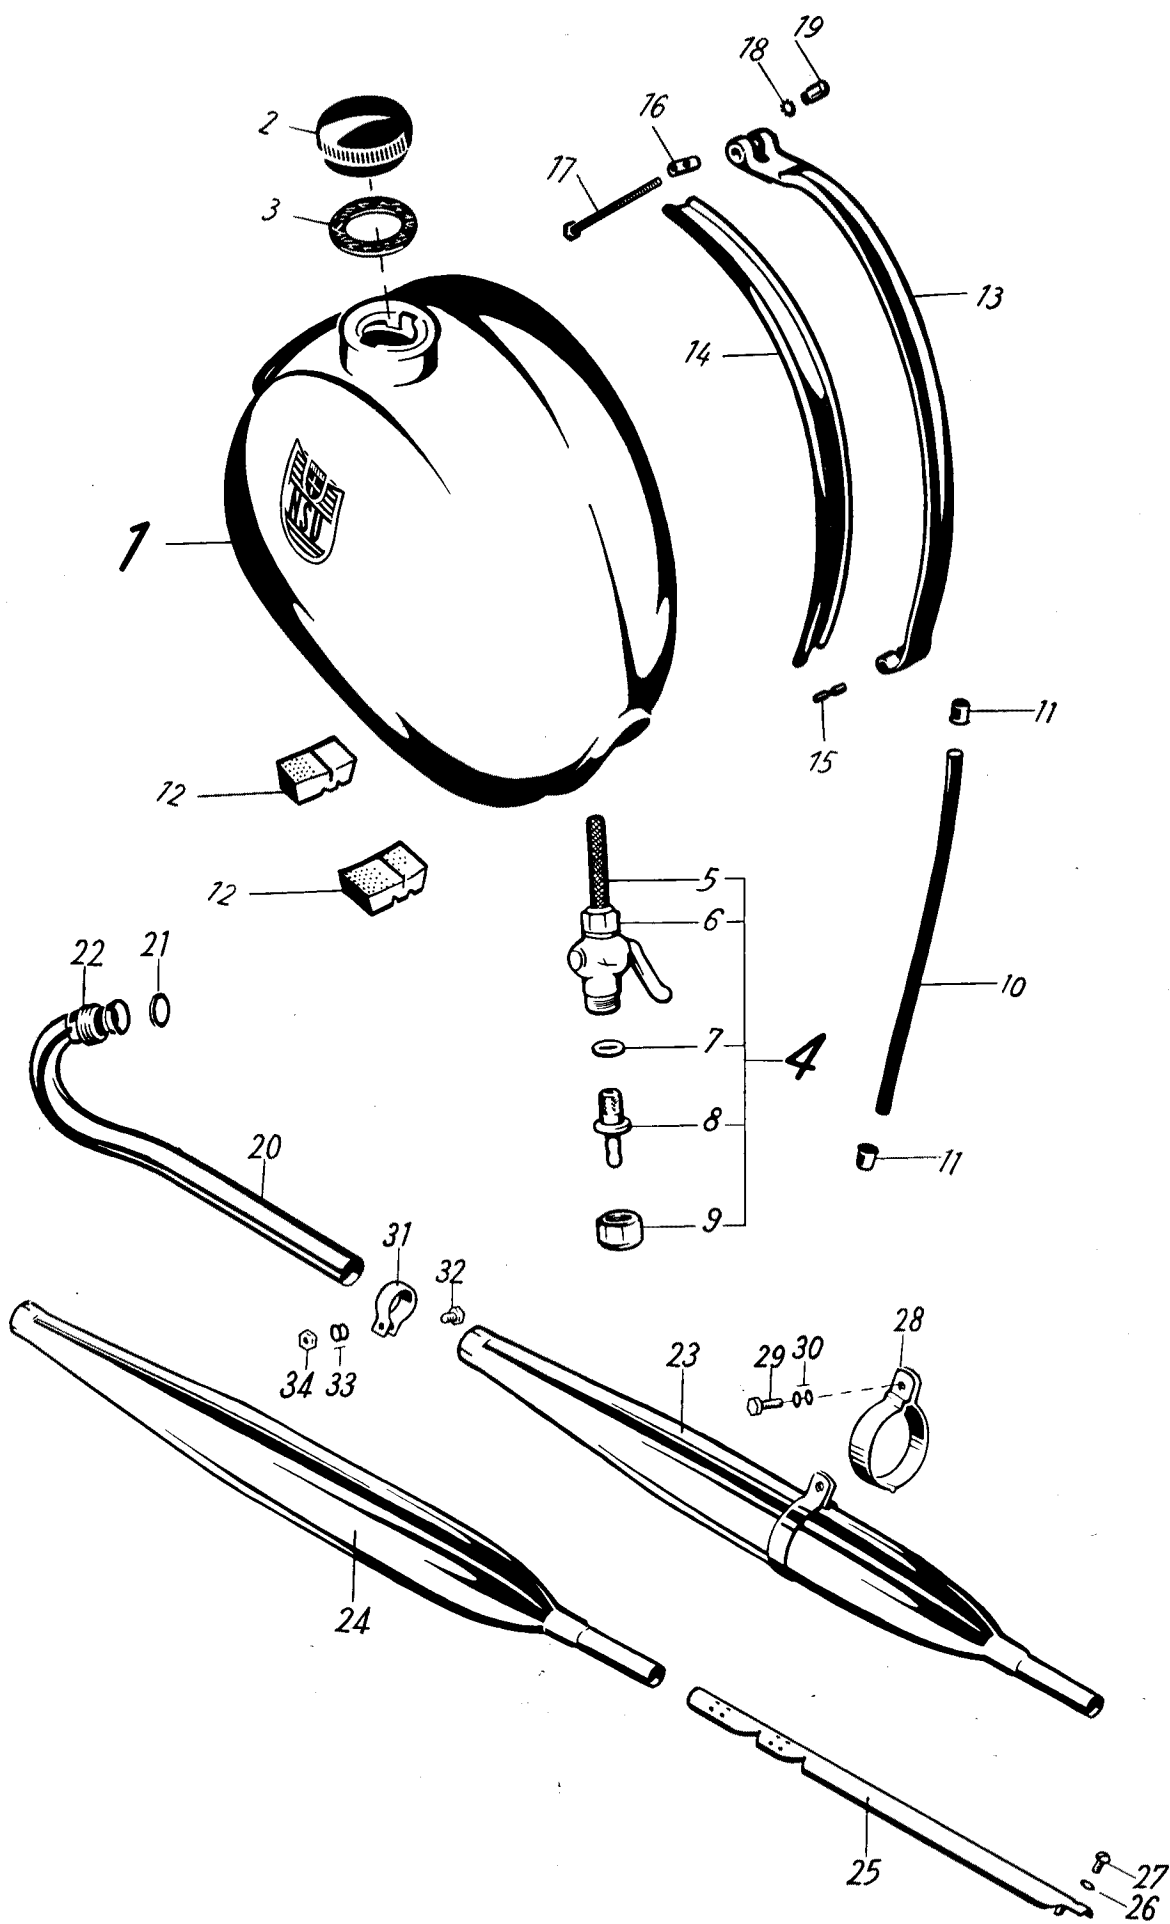

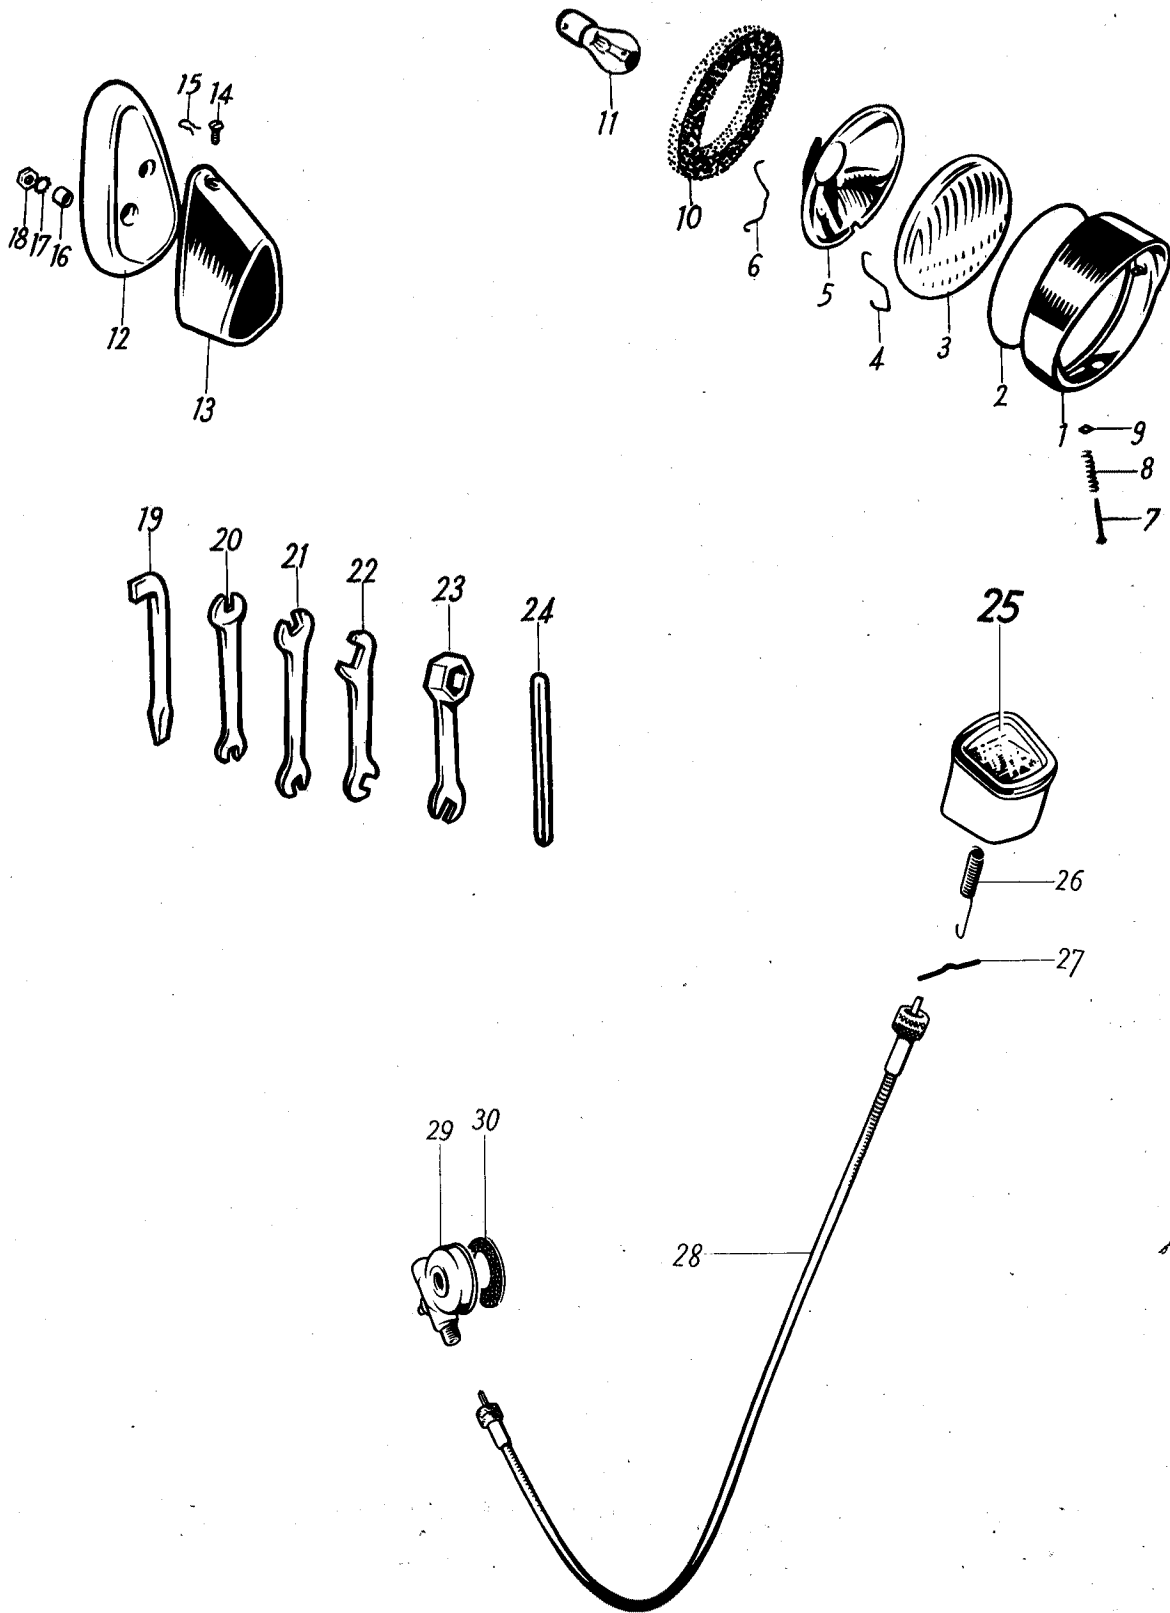


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
	1 2			
Headlamp	16 81 00 522	1		—
Headlamp	16 81 00 520	1	for Eire	—
Rim	16 81 52 914	1		1
Gasket	16 81 50 917	1		2
Lens	16 81 52 915	1		3
Spring	16 81 51 918	3		4
Reflector	16 81 51 916	1		5
Spring for reflector	16 81 50 939	2		6
Socket	16 81 00 925	1		—
Socket	16 81 00 902	1	for Eire	—
Adjusting screw	16 81 50 936	1		7
Spring	16 81 50 938	1		8
Nut	16 81 50 937	1		9
Packing ring	16 81 00 008	1		10
Angle	—	—	} s. page 60, Illustr. No. 9-11	—
Spring washer	—	—		—
Knurled screw	—	—		—
Bulb	16 81 00 514	1	6 V 15/15 W	11
Bulb	016 096 826	1	6 V 15/15 W for Eire	—
Dipswitch	16 81 02 509	1		—
Screw	M 3x15 DIN 91	2		—
Tail lamp	16 81 00 512	1		—
Rubber sleeve	16 81 00 009	1		—
Tail lamp	16 81 01 508	1	for Eire	—
Rubber pead	16 81 01 002	1		12
Screw	16 81 50 932	1		—
Cap for Tail lamp	16 81 50 942	1		13
Screw	16 81 51 900	1		14
Spring clip	16 81 50 941	1		15
Spacer	16 81 50 940	2		16
Lock washer	A 5,3 DIN 6798	2		17
Nut	M 5 DIN 934	2		18
Bulb	16 81 00 929	1	H 6 V 2,7 W	—
Cable Harness	16 81 00 517	1	{ Engine-Headlamp L = 1070 mm Headlamp-Tail lamp L = 2120 mm	—
Protective sleeve	16 81 00 006	1		—
Tools	16 91 00 900	1		—
Screw driver	16 91 00 003	1		19
Spanner	11 91 00 600	1	8x9 mm	20
Spanner	11 91 00 601	1	10x11 mm	21
Spanner for Cone	16 91 00 004	1		22
Plug spanner	16 91 00 002	1		23
Tommy bar	16 91 00 005	1	7 mm diam L = 118 mm	24
Speedometer head (M. P. H.)	16 92 02 505	1		25
Spring	16 43 00 036	1		26
Bracket	16 43 00 037	1		27
Flexible drive	16 92 02 502	1	L = 850 mm	28
Speedometer drive	16 92 01 503	1		29
Felt washer	16 92 00 905	1		30


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-L				
	1 2			
Side support	16 93 00 509	1	} optional for Quickly-N, S	1
Shell case	16 93 00 507	1		2
Double spring washer	16 93 00 042	1		3
Washer	16 93 00 045	1		4
Split pin	3x22 DIN 94	1		5
Rubber plug	16 93 00 044	1		6
Bolt	16 93 00 058	1		7
Splash guard-front and rear complete	16 93 00 901	1	} optional for Quickly-N	—
Left front half	16 93 00 512	1		8
Right front half	16 93 00 513	1		9
Rubber grommet	16 93 00 057	2		10
Oval-head screw	M 3x8 DIN 85	6		11
Washer	3,2 DIN 125	6		12
Lock washer	A 3 DIN 137	12		13
Nut	M 3 DIN 934	6		14
Left rear half	16 93 00 514	1		15
Right rear half	16 93 00 515	1		16
Screw	6x18 DIN 933	2		17
Oval-head screw	M 3x8 DIN 85	4		18
Washer	3,2 DIN 125	4		19
Lock washer	A 3 DIN 137	8		20
Nut	M 3 DIN 934	4		21
Screw for strut fastening	M 6x18 DIN 931	2	{ replacing Screws M 6 x 22 DIN 931	—
Leg-guard	16 93 00 511	1	{ for starting carburettor use push button 16 16 00 018 and pressure pin 16 16 01 019	22
Lid	16 93 01 519	1		23
Rubber plug	11 40 00 031	1		24
Knurled screw	16 93 00 064	1		25
Badge	16 93 01 050	1		26
Hose grommet	16 93 00 038	1		27
Connecting strut	16 93 01 049	1		28
Spacing washer	11 39 00 009	2		29
Oval-head countersund screw	AM 6x10 DIN 91	2		30
Stud	16 93 00 031	1	{ replacing Crankcase screw M 6x80 DIN 931	31
Spring washer	A 6 DIN 137	2	} optional	32
Nut	M 6 DIN 934	1		33
Washer	6,4 DIN 125	1		34
Nut	16 52 00 043	1		35
Spring washer	A 6 DIN 137	2		36
Spring washer	A 6 DIN 137	2		37
Nut	M 6 DIN 934	1		38
Inflator	16 93 00 502	1	Quickly-N and -S	39
Nut for nipple	16 93 00 900	1		—
Inflator	16 93 01 502	1	Quickly-L	40
Lock with key	—	—	{ → 208 684 / 225 051 s. page 35	—
Lock with key	—	—	{ 208 685 / 225 052 → s. page 59	—
Strap for luggage-carrier	16 93 00 520	1	order spare key from producers	41

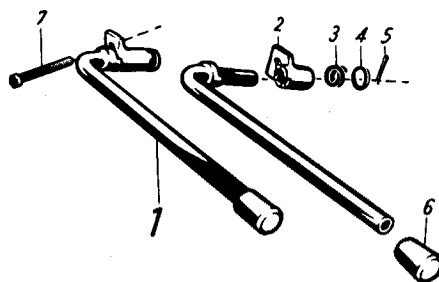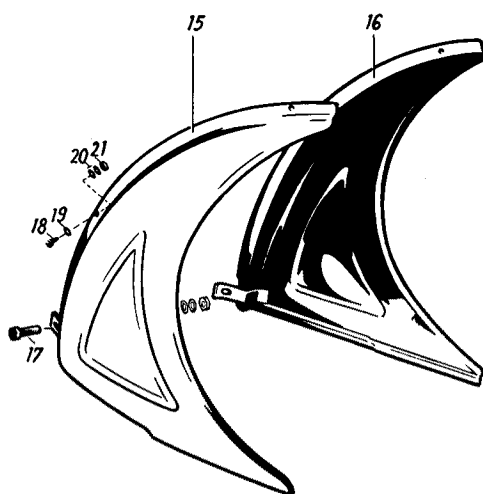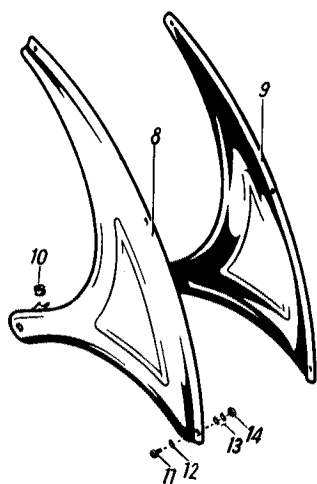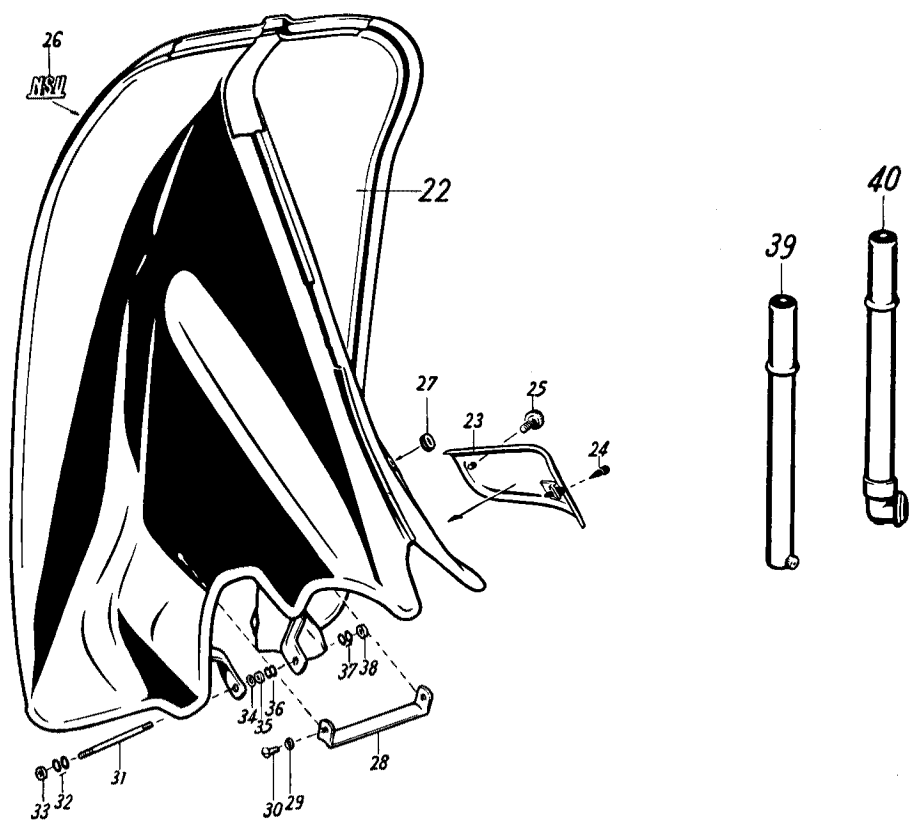

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
Frame	16 31 90 902	1		1
Steering head race	16 31 90 904	2		2
Nameplate	16 31 00 900	1	not supplied without stamped number	3
Grooved	2x3 DIN 1476	1		4
Grease nipple	16 31 90 903	1		5
Bush	16 32 90 900	2		6
Centre stand	16 35 90 505	1		7
Screw	16 35 90 901	1		8
Nut	M 10 DIN 934	1		9
Spring	16 35 90 900	1		10
Rear fork	16 32 90 903	1	{ → 733 142 / 805 276 and alternatively with 16 32 00 511 733 143 / 805 277 → → 738 200 / 807 506	1
Rear fork	16 32 00 511	1	{ alternatively with 16 32 90 903 733 143/805 277 → → 738 200 / 807 506 and 738 201 / 807 507 →	—
Axle	16 32 90 901	1		2
Nut	M 12x1,5 DIN 936	1		3
Shock absorber	16 32 90 905	2		4
Spring	16 32 90 906	2		—
Washer	10,5 DIN 125	4		5
Screw	M 10x1x35 DIN 960	4		6

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
Cavallino				
Front mudguard	16 33 90 901	1	→ 747 489 / 810 290	1
Front mudguard	16 33 90 510	1	} 747 490 / 810 291 →	—
Rubber sleeve	16 93 00 057	2		—
Stay	16 33 90 902	2		2
Screw	M 6x12 DIN 933	2		3
Screw	M 6x10 DIN 933	2		—
Washer	6,4 DIN 125	4		4
Lock washer	B 6 DIN 127	4		5
Nut	M 6 DIN 934	4		6
Screw	M 6x12 DIN 933	2		7
Lock washer	B 6 DIN 127	2		8
Nut	M 6 DIN 934	2		9
NSU emblem (blue)	533 085 385	1		10
Spring washer	A 4 DIN 137	2		11
Nut	M 4 DIN 934	1		12
Rear mudguard	16 34 90 901	1		13
Screw	M 6x12 DIN 933	1		14
Washer	6,4 DIN 125	1		15
Lock washer	B 6 DIN 127	1		16
Nut	M 6 DIN 934	1		17
Rubber sleeve	16 34 90 902	1		18
Washer	6,4 DIN 125	1		19
Lock washer	B 6 DIN 127	1		20
Nut	M 6 DIN 934	1		21
Screw	M 6x25 DIN 933	2		22
Washer	6,4 DIN 125	2		23
Lock washer	B 6 DIN 127	2		24
Nut	M 6 DIN 934	2		25
Bracket	16 31 00 087	1		26
Screw	M 4x10 DIN 85	2		27
Spring washer	B 4 DIN 137	4		28
Nut	M 4 DIN 934	2		29
Screw	M 4x10 DIN 85	2		30
Washer	4,3 DIN 125	2		31
Spring washer	B 4 DIN 127	2		32
Nut	M 4 DIN 934	2		33
Dual seat	16 38 90 505	1		1
Spring, front	16 38 90 920	2	L = 130 mm	—
Spring, front and rear	16 38 90 921	8	L = 125 mm	—
Spring, rear	16 38 90 922	3	L = 142 mm	—
Spring, rear	16 38 90 924	2	L = 78 mm	—
Dual seat, lower part	16 38 90 918	1	not supplied by itself	2
Dual seat cover	16 38 90 919	1		3
Screw	M 6x18 DIN 933	2		4
Washer	6,4 DIN 125	2		5
Lock washer	B 6 DIN 127	2		6
Nut	M 6 DIN 934	2		7

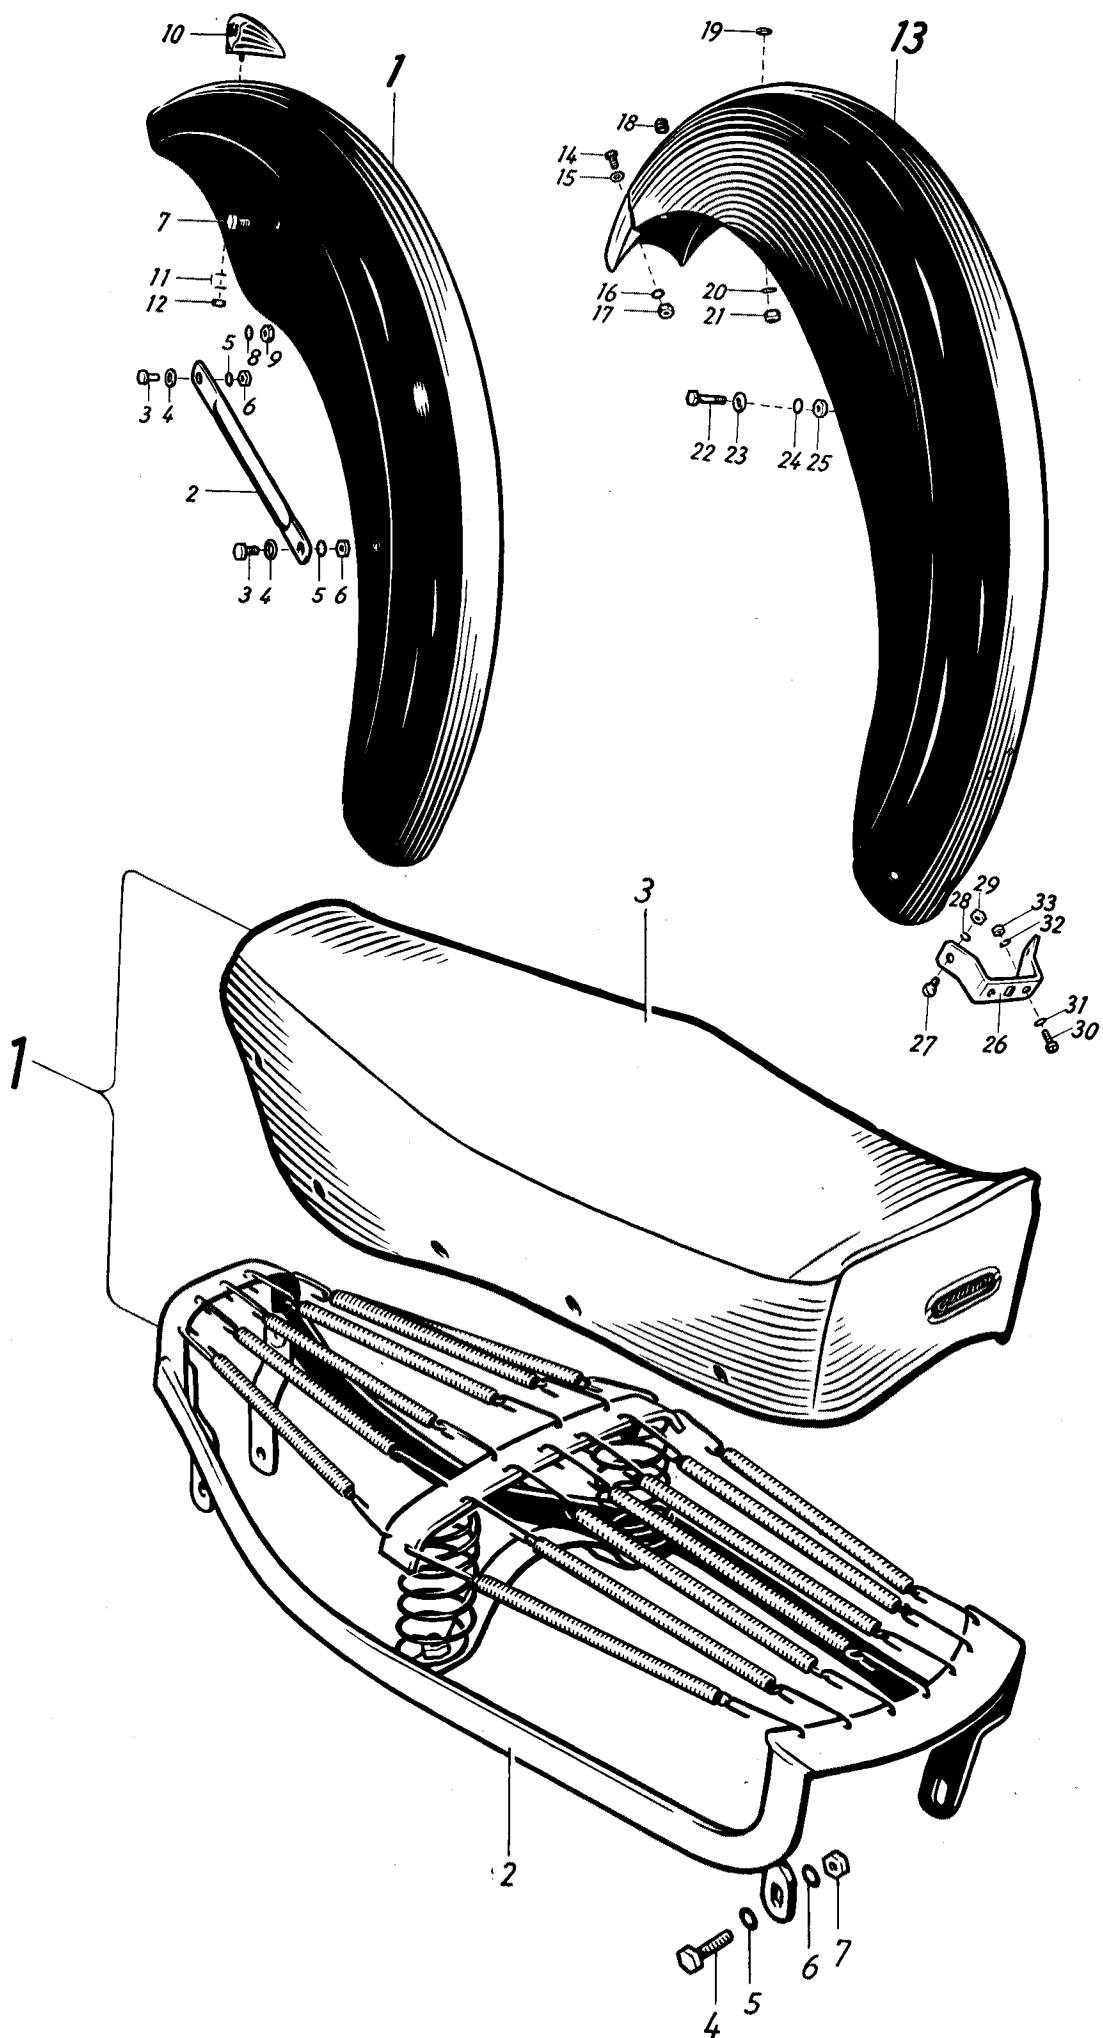

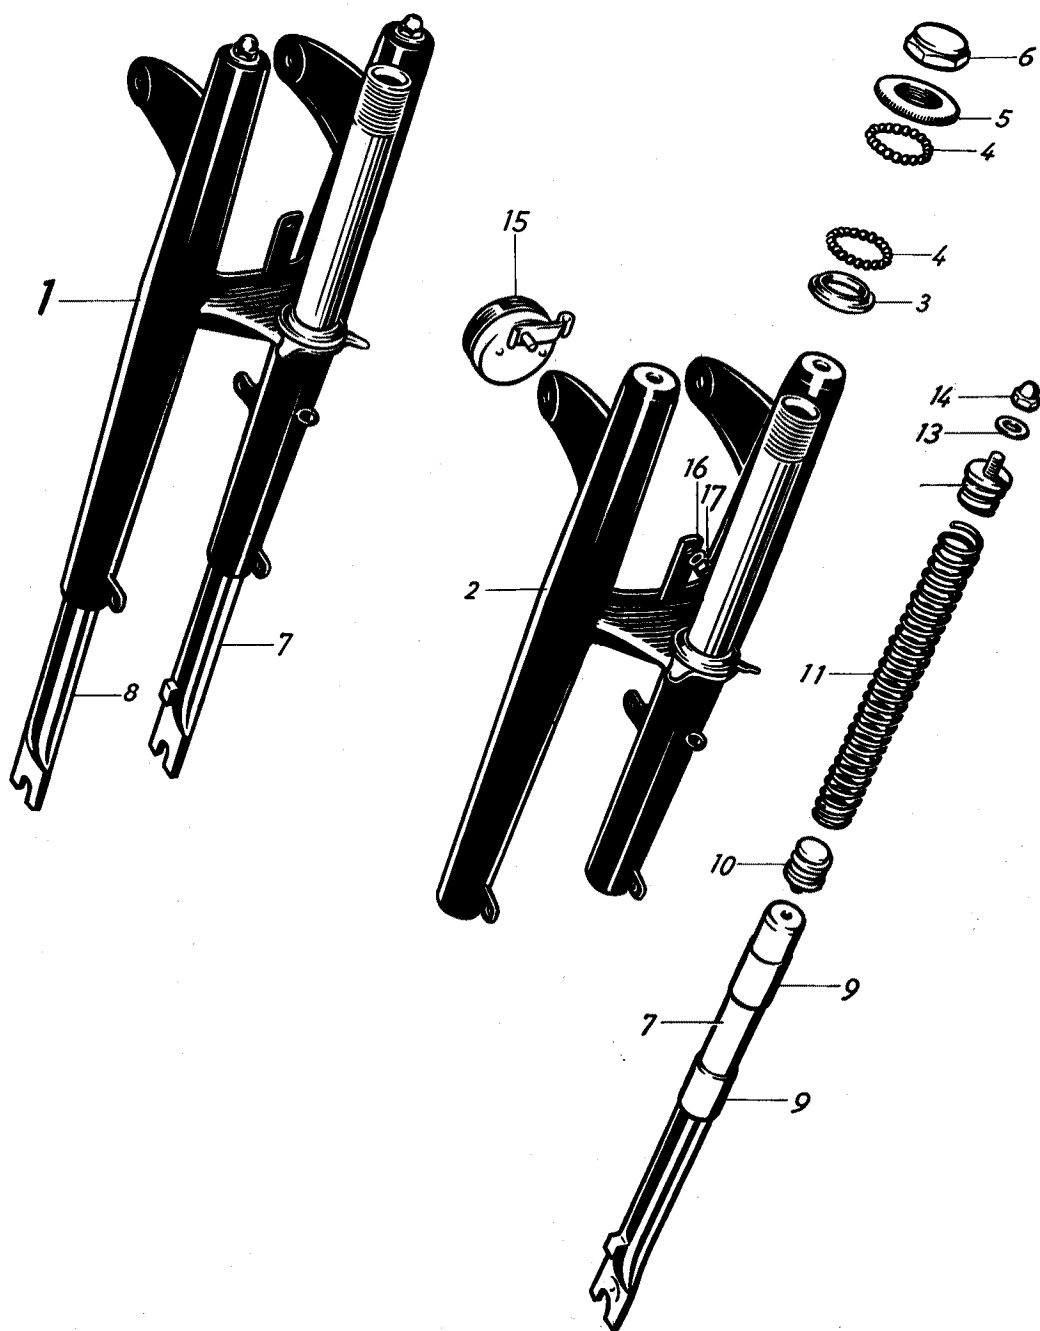




Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
1 2 3 4 5				
Spring fork	16 41 90 517	1	→ 733 142 / 805 276 and alternatively with 16 41 91 517 → 733 143 / 805 277 → → 738 200 / 807 506	1
Spring fork	16 41 91 517	1	for NSU-hub (alternatively with 16 41 90 517 → 733 143 / 805 277 → → 738 200 / 807 506). → 738 201 / 807 507 → → 747 489 / 810 290 only 16 41 91 517	—
Spring fork	16 41 90 907	1		2
Cone, bottom	16 41 90 908	1		3
Ball	034 049 991	each 23	3/16" diam	4
Nut	16 41 90 909	1		5
Nut	16 41 90 905	1		6
Fork tube	—	—	not supplied	—
Fork tube, right	16 41 91 911	1	with resistance for brake plate	7
Fork tube, right	16 41 91 522	1		—
Fork tube, left	16 41 91 915	1		8
Bush	16 41 90 904	4	} for repair	9
Retainer	16 41 90 913	2		—
Retainer	16 41 90 912	2	before modification 4 pieces	10
Spring	16 41 90 906	2		11
Washer	8,4 DIN 125	2		13
Nut	M 8 DIN 1587	2		14
Bellows	40 43 00 092	2	} for subsequent bitting on both parts of the fork → 747 489 / 810 290	—
Ring	16 41 00 402	2		—
Grub screw	M 3x6 DIN 553	6		—
Rattle	16 81 90 506	1		—
Cable for rattle	16 81 00 003	1		—
Screw	M 7x15 DIN 933	1	→ 747 489 / 810 290	—
Screw	M 7x20 DIN 933	1	} 747 490 / 810 291 →	—
Spacer	16 81 90 013	1		—
Washer	7,4 DIN 125	1		—
Spring washer	B 7 DIN 137	1		—
Nut	M 7 DIN 934	1		—
Steering-head lock	16 41 90 519	1	order spare key from producers	—
Cover plate	19 41 00 034	1		—
Grooved stud	3x8 DIN 1476	1		—
Spring washer	A 3 DIN 137	1		—

Group 41
Spring fork

NSU-Quickly (Cavallino)


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
	1 2			
Spring fork	16 41 93 517	1	747 490 / 810 291 →	1
Fork lower section	16 41 90 530	1		2
Spring fork	16 41 90 523	2		3
Fork tube, left	16 41 91 521	2		4
Dust tube	16 41 90 098	2		5
Dust tube holder	16 41 90 097	6		6
Rubber for Screen	16 41 90 096	2		7
Fork head	16 41 90 916	1		8
Cone, bottom	16 41 90 908	1		9
Screw	M 8x22 DIN 912	2		10
Rubber ring	16 41 90 095	2		11
Lamp holder left	16 41 90 527	1		12
Lamp holder right	16 41 90 528	1		13
Fork bridge	16 41 90 524	1		14
Washer	8,4 DIN 125	2		15
Screw	16 41 90 525	2		16
Ball	034 049 991	46	3/16" diam	17
Nut	16 41 90 909	1		18
Nut	16 41 90 905	1		19

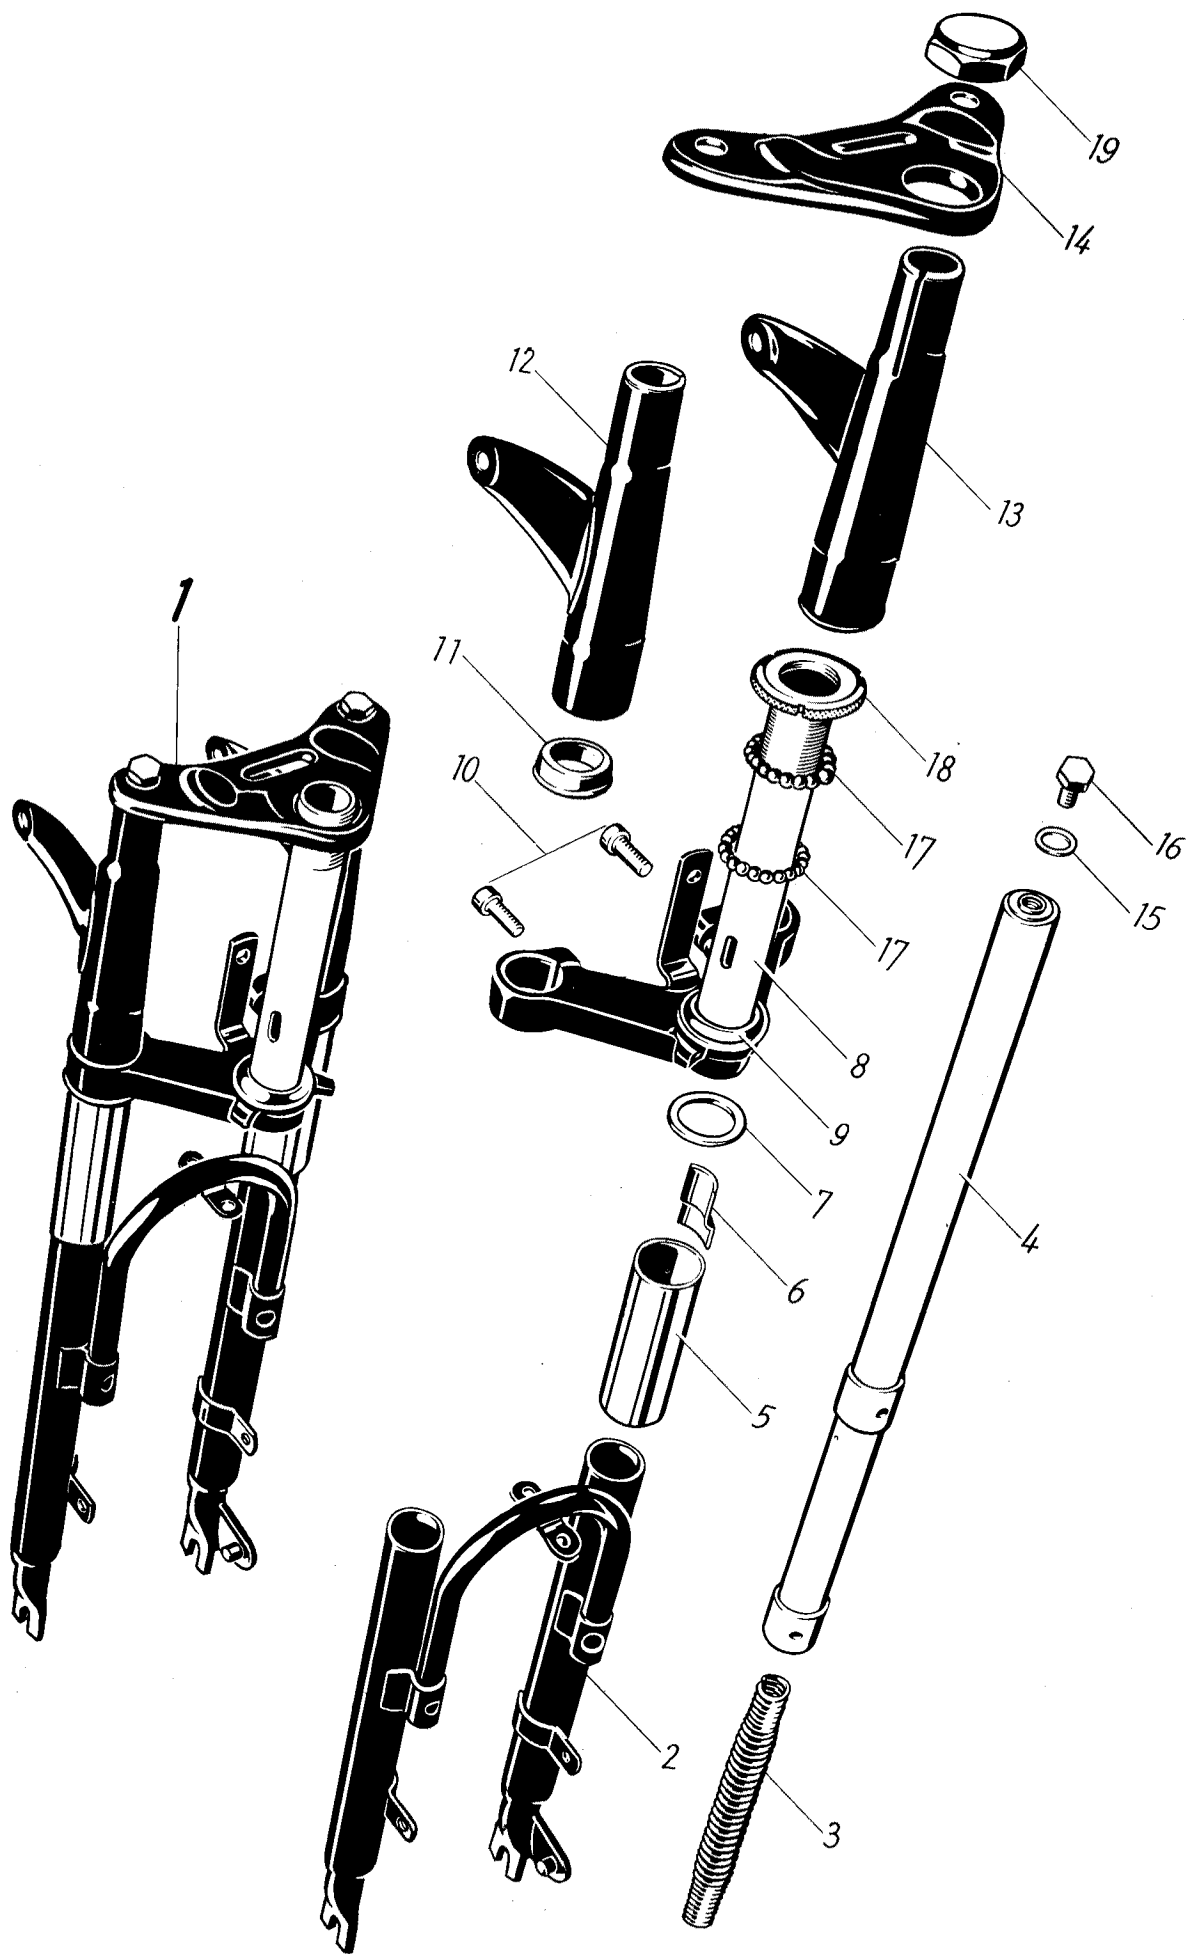

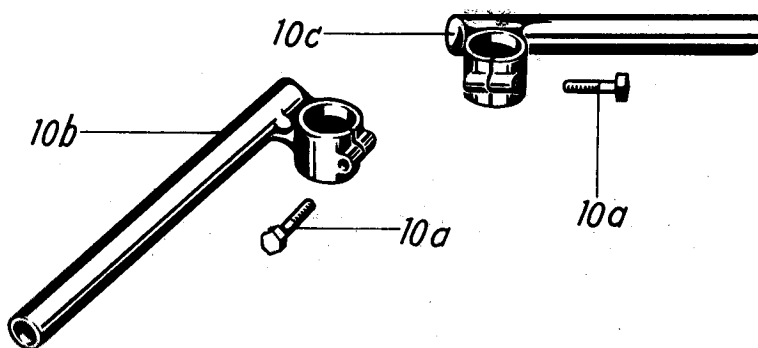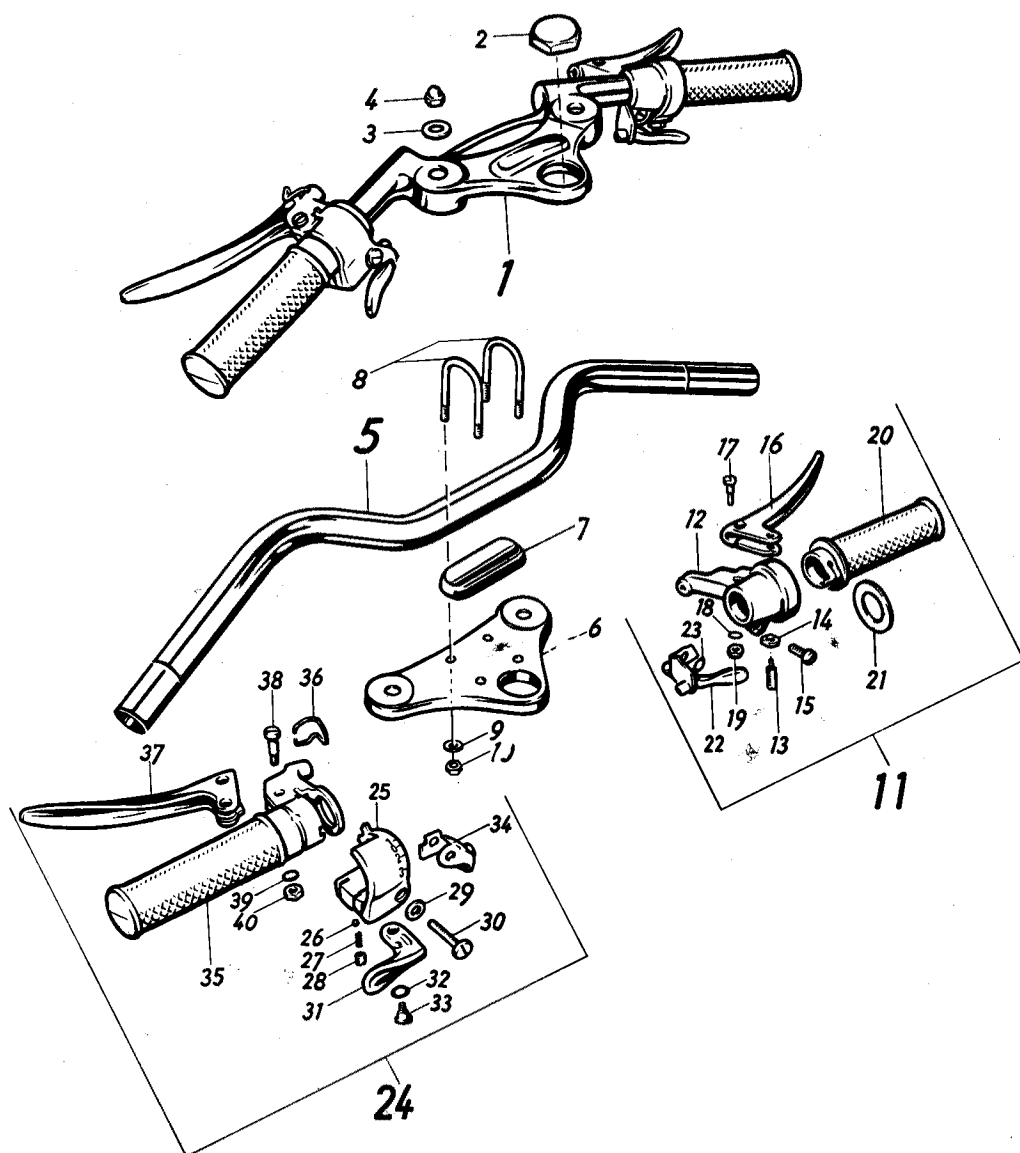

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
	1 2 3 4 5			
Handlebar	16 43 90 900	1		1
Nut	—	1	} s.page 71, Illustr. No. 6, 13, 14	2
Washer	—	2		3
Nut	—	2		4
Handlebar	16 43 90 524	1	→ 696 739 / 741 874	—
Handlebar (adjustable)	16 43 91 900	1		—
Handlebar tube	16 43 91 524	1	} 696 740 / 741 875 → → 733 142 / 805 276. (moreover alternatively with 2 piece handle-bars 733 143 / 805 277 → → 738 200 / 807 506)	5
Handlebar support	16 43 90 901	1		6
Pad	16 43 90 902	1		7
Bracket	16 43 90 903	2		8
Washer	6,4 DIN 125	4		9
Nut	M 6 DIN 934	4		10
Handlebar half, left	16 43 90 526	1	} (alternatively with 16 43 91 524 733 143 / 805 277 → → 738 200 / 807 506). 738 201 / 807 507 → → 747 489 / 810 290 only 16 43 90 526/527	—
Handlebar half, right	16 43 90 527	1		—
Handlebar support	16 43 91 901	1		—
Screw	M 6x25 DIN 931	2		10a
Handlebar half, left	16 43 91 526	1	} 747 490 / 810 291 →	10b
Handlebar half, right	16 43 91 527	1		10c
Throttle twistgrip	16 43 03 502	1	w/o Illustr.-No. 22, 23	11
Twistgrip housing	16 44 04 900	1		12
Adjusting screw	16 44 00 929	1	6 mm	13
Nut	M 6 DIN 439	1		14
Screw	044 413 608	1		15
Brake lever	16 44 00 902	1		16
Screw	16 44 00 903	1		17
Lock washer	J 5,3 DIN 6797	1		18
Nut	M 5 DIN 934	1		19
Twistgrip sleeve	16 44 03 901	1		20
Rubber grip	16 44 01 904	1		—
Washer	16 44 02 921	1		21
Gear change twistgrip with control levers for clutch and decompr.	16 43 02 503	1		24
Housing	16 44 04 905	1		25
Ball	11 13 00 780	1	4 mm diam	26
Spring	16 44 00 911	1		27
Grub screw	014 106 433	1	M 5x4	28
Washer	6,4 DIN 125	1		29
Screw	16 44 00 913	1		30



Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
	1 2 3 4			
Decompressor lever	16 44 00 909	1		31
Spring washer	16 44 00 923	1		32
Screw	M 4x4 DIN 923	1		33
Support	16 44 00 916	1		34
Twistgrip sleeve	16 44 04 906	1		35
Rubber grip	16 44 00 904	1		—
Stirrup	16 44 00 910	1		36
Clutch lever	16 44 02 907	1		37
Bolt	16 44 00 908	1		38
Lock washer	J 5,3 DIN 6797	1		39
Nut	M 5 DIN 934	1		40

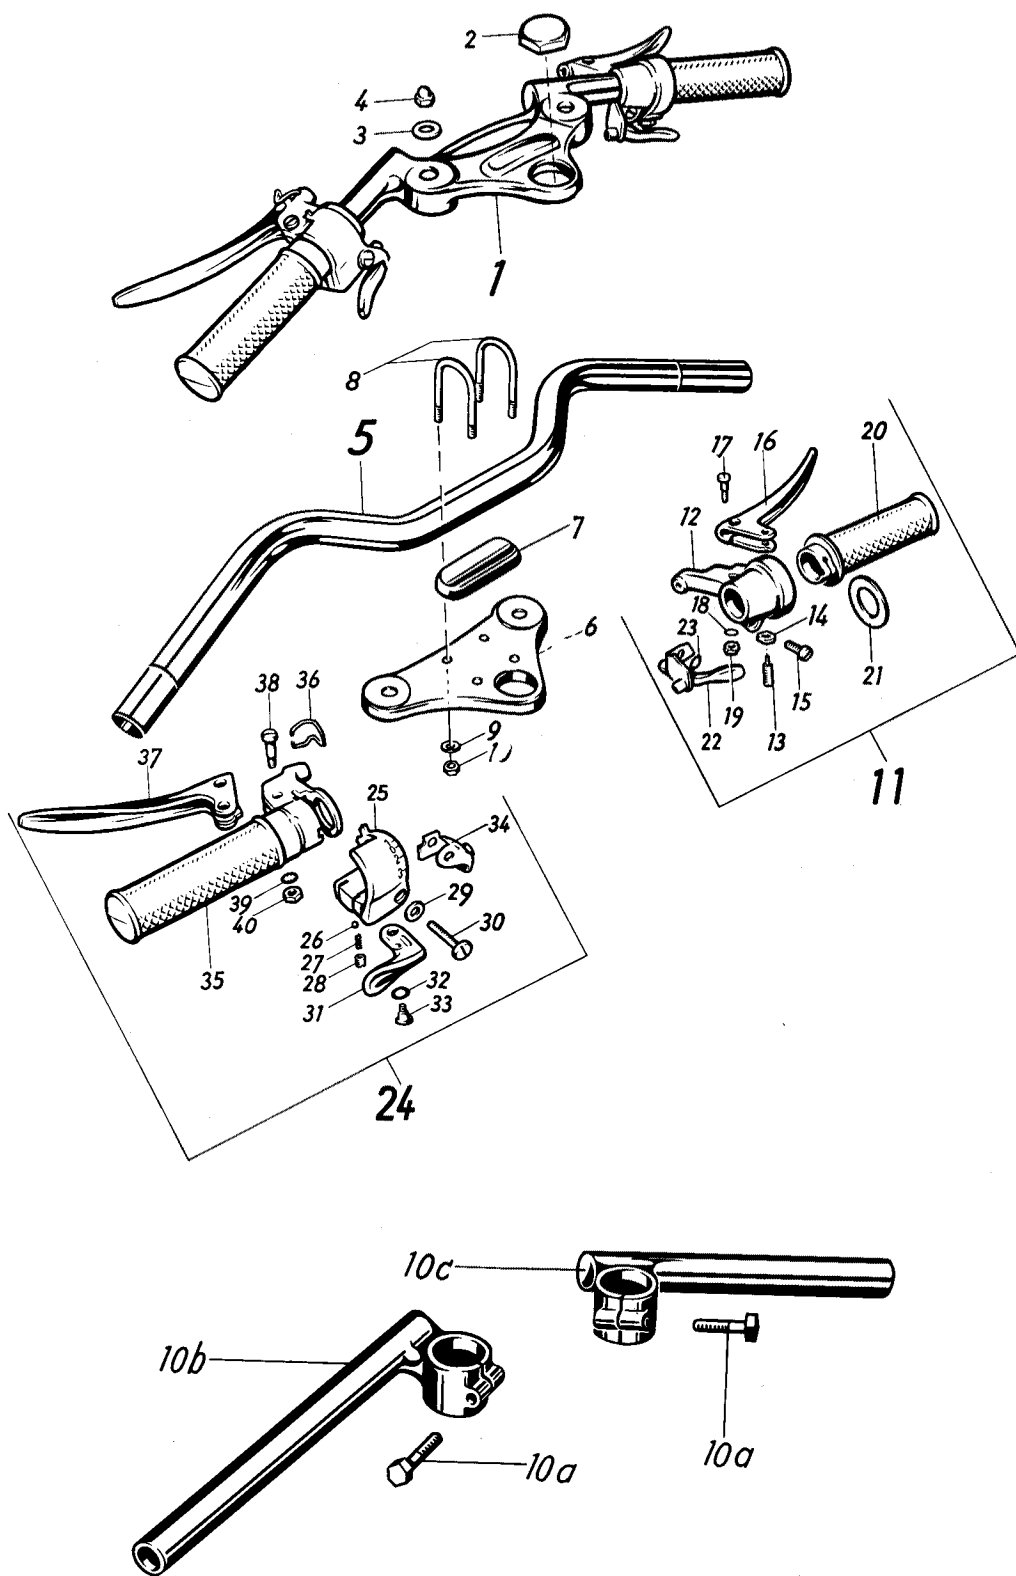



Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY				
Cavallino				
Rubber sleeve	16 44 00 025	1		1
Hand-brake control cable	16 44 00 513	1		2
Hose	084 844 015	1		3
Yoke	16 53 00 013	1		4
Pivot pin	16 53 00 010	1	→ 733 142 / 805 276	5
Washer	11 53 00 002	1	(moreover alternatively with cables for 2-piece handlebars 733 143 / 805 277 → 738 200 / 807 506)	—
Clip	11 53 00 819	1		6
Screw	16 44 00 930	1		—
Nut	16 44 00 049	1		—
Throttle control cable	16 44 00 519	1		7
Hand-brake control cable	16 44 00 520	1		8
Hose	16 44 01 003	1	(alternatively with former cables 733 143 / 805 277 → 738 200 / 807 506) and 738 201 / 807 507 →	9
Nipple	16 44 00 023	1		10
Clutch control cable	16 44 00 502	1		11
Nipple	16 44 00 023	1		—
Gear change control cable	16 44 05 503	1	L = 874 mm → 733 142 / 805 276. (moreover alternatively with cables for 2-piece handlebars 733 143 / 805 277 → 738 200 / 807 506)	—
Gear change control cable	16 44 00 515	1	L = 790 mm (alternatively with former cables 733 143 / 805 277 → 738 200 / 807 506) and 738 201 / 807 507 →	12
Nipple, bottom	16 44 00 056	2		13
Decompressor control cable	16 44 00 516	1		14
Nipple	16 44 00 021	1		15
Rear brake cable	—	—	s. page 80, Illustr. No. 1-8	—

Description	Order-No.	Quantity	Remarks	Illustr.-No.
			QUICKLY Cavallino	
			→ 733 142 / 805 276. (moreover alternatively with 16 51 90 523 733 143 / 805 277 → → 738 200 / 807 506)	
Front wheel w/o tyre and tube	16 51 90 521	1		—
Front wheel w/o brake w/o tyre and tube	16 51 90 916	1		—
Hub	16 51 90 904	1		—
Hub	16 51 90 907	1		1
Ball race	16 51 90 905	2		2
Ball	035 052 368	each 10	1/4" diam	3
Washer	16 51 90 914	2		4
Felt ring	16 51 90 912	2		5
Cap	16 51 90 911	2		6
Front wheel	16 51 90 908	1		7
Cone	16 52 90 909	2		8
Washer	16 52 90 910	3		9
Nut	16 51 90 913	3		10
Speedometer drive	—	—	s. page 83	11
Washer	16 52 90 913	2		12
Nut	16 52 90 914	2		13
Front wheel brake	16 51 90 909	1		14
Brake plate	16 51 90 910	1		15
Brake shoe, lower	16 52 90 928	1		16
Brake shoe, upper	16 52 90 906	1		—
Brake lining	16 52 90 908	2		17
Rivet	16 52 90 921	8		18
Spring	16 52 90 907	2		19
Brake cam	16 52 90 917	1		20
Washer	16 52 90 918	1		21
Brake lever	16 52 90 919	1		22
Washer	6,4 DIN 125	1		23
Nut	M 6 DIN 934	1		24
Rim	16 51 90 078	1		→
Spoke	16 51 90 906	36		—
Nipple	16 51 90 915	36		—
Tyre	23—2,25	—	} not supplied	—
Inner tube	23—2,25	—		—
Well filler	23—2,00	—		—


Description	Order-No.	Quantity	Remarks	Illustr.-No.
1 2 3 4 QUICKLY Cavallino				
Front wheel w/o tyre and tube	16 51 90 523	1	(alternatively with 16 51 90 521 733 143 / 805 277 → → 738 200 / 807 506). 738 201 / 807 507 → only NSU-type	—
Front wheel w/o brake w/o tyre and tube	16 51 90 917	1		—
Hub	16 51 90 525	1		—
Hub	16 51 03 900	1		1
Ball race	16 51 00 023	2		2
Rim	16 51 90 078	1		—
Spoke	16 51 91 906	36	M 3x211 mm	—
Nipple	025 104 183	16	M 3	—
Cone	16 52 01 015	1		3
Seal ring	16 51 00 045	1		4
Ball cage	16 51 00 044	1		5
Spacer	16 52 02 017	1		6
Tolerance ring	16 52 00 037	1		7
Cone	16 52 01 016	1		8
Seal ring	16 51 00 045	1		9
Ball cage	16 51 00 044	1		10
Front wheel brake	16 51 02 511	1		—
Brake plate	16 51 04 503	1		11
Bush	16 52 03 026	1	12x15x19 mm	12
Brake cam	16 51 03 027	1		13
Brake lever	16 51 01 502	1		14
Spring	16 51 01 035	1		15
Spring washer	B 7 DIN 137	1		16
Nut	16 52 01 043	1		17
Brake shoe	16 51 02 509	2		18
Brake lining	16 52 01 034	2		19
Rivet	16 51 00 043	16		20
Spring	16 51 03 030	1		21
Shim	16 51 00 054	as req.	18,2x26x0,2; 0,3 mm	22
Shim	16 51 01 054	as req.	18,2x26x0,5 mm	
Nut	16 51 03 025	1		23
Spindle	16 51 03 028	1		25
Washer	10,5 DIN 125	2		—
Nut	16 51 00 036	1		26
Tyre	23—2,25	—	} not supplied	—
Inner tube	23—2,25	—		—
Well filler	23—2,00	—		—

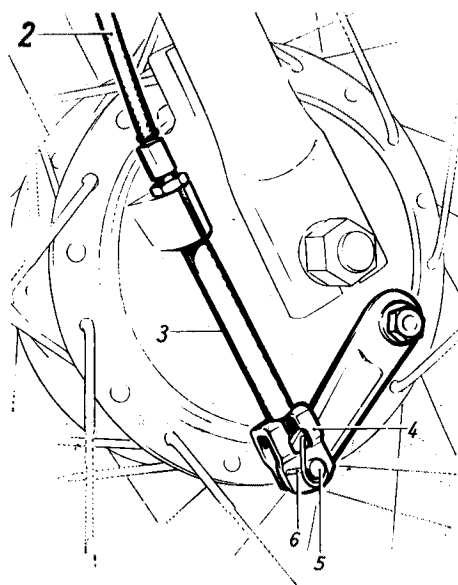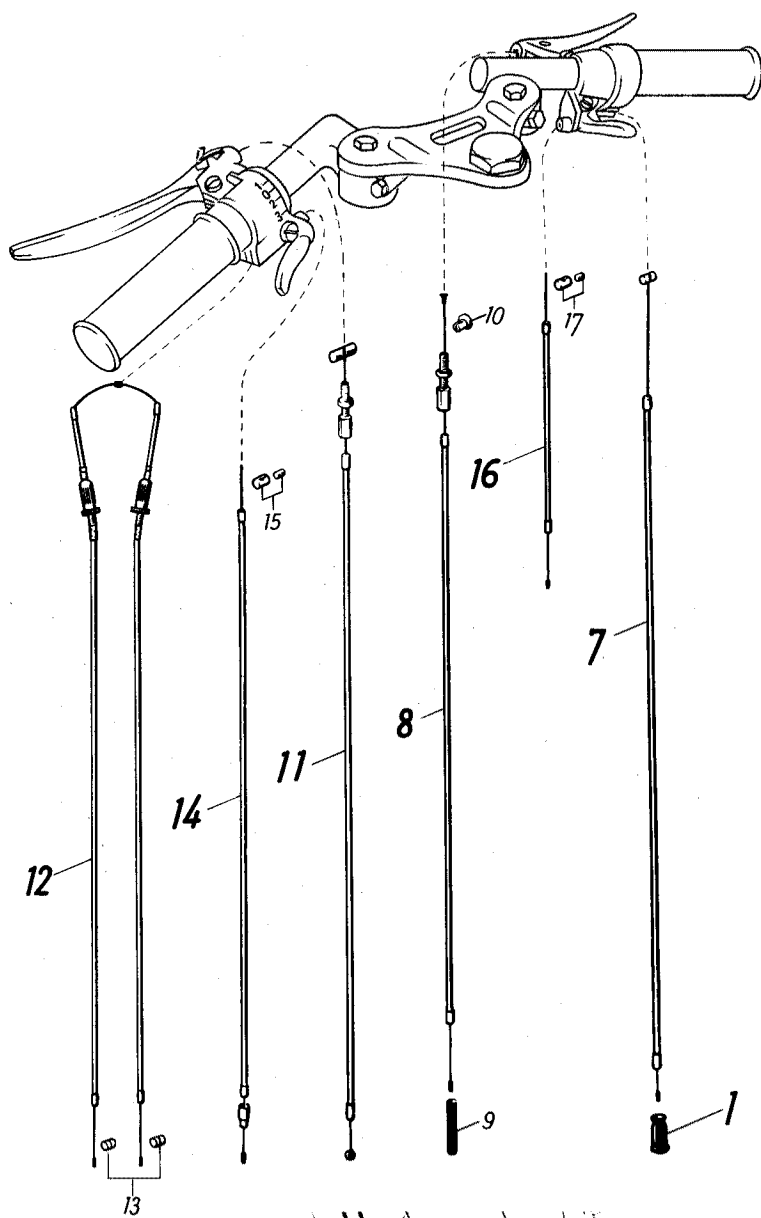


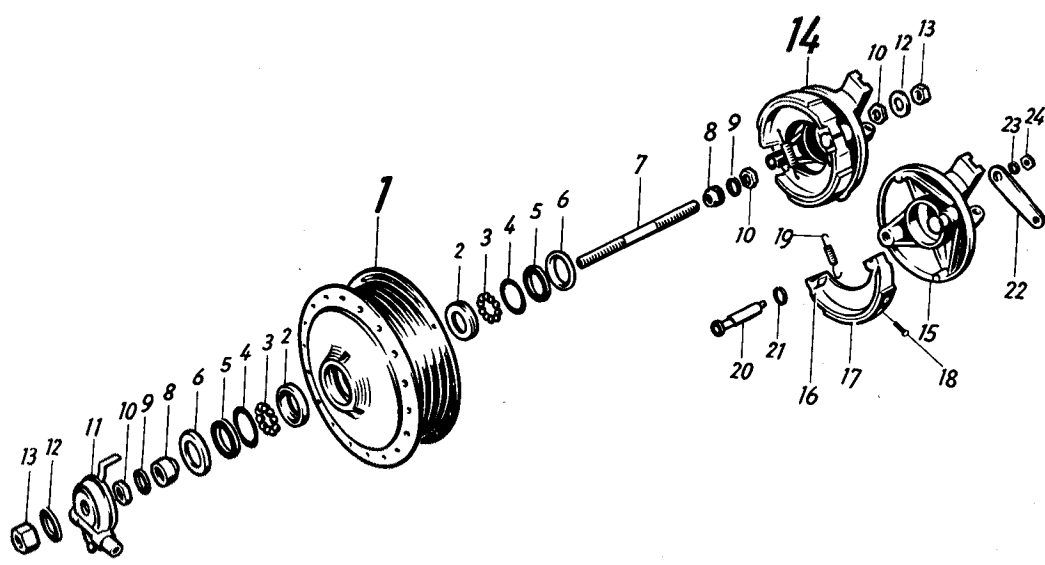

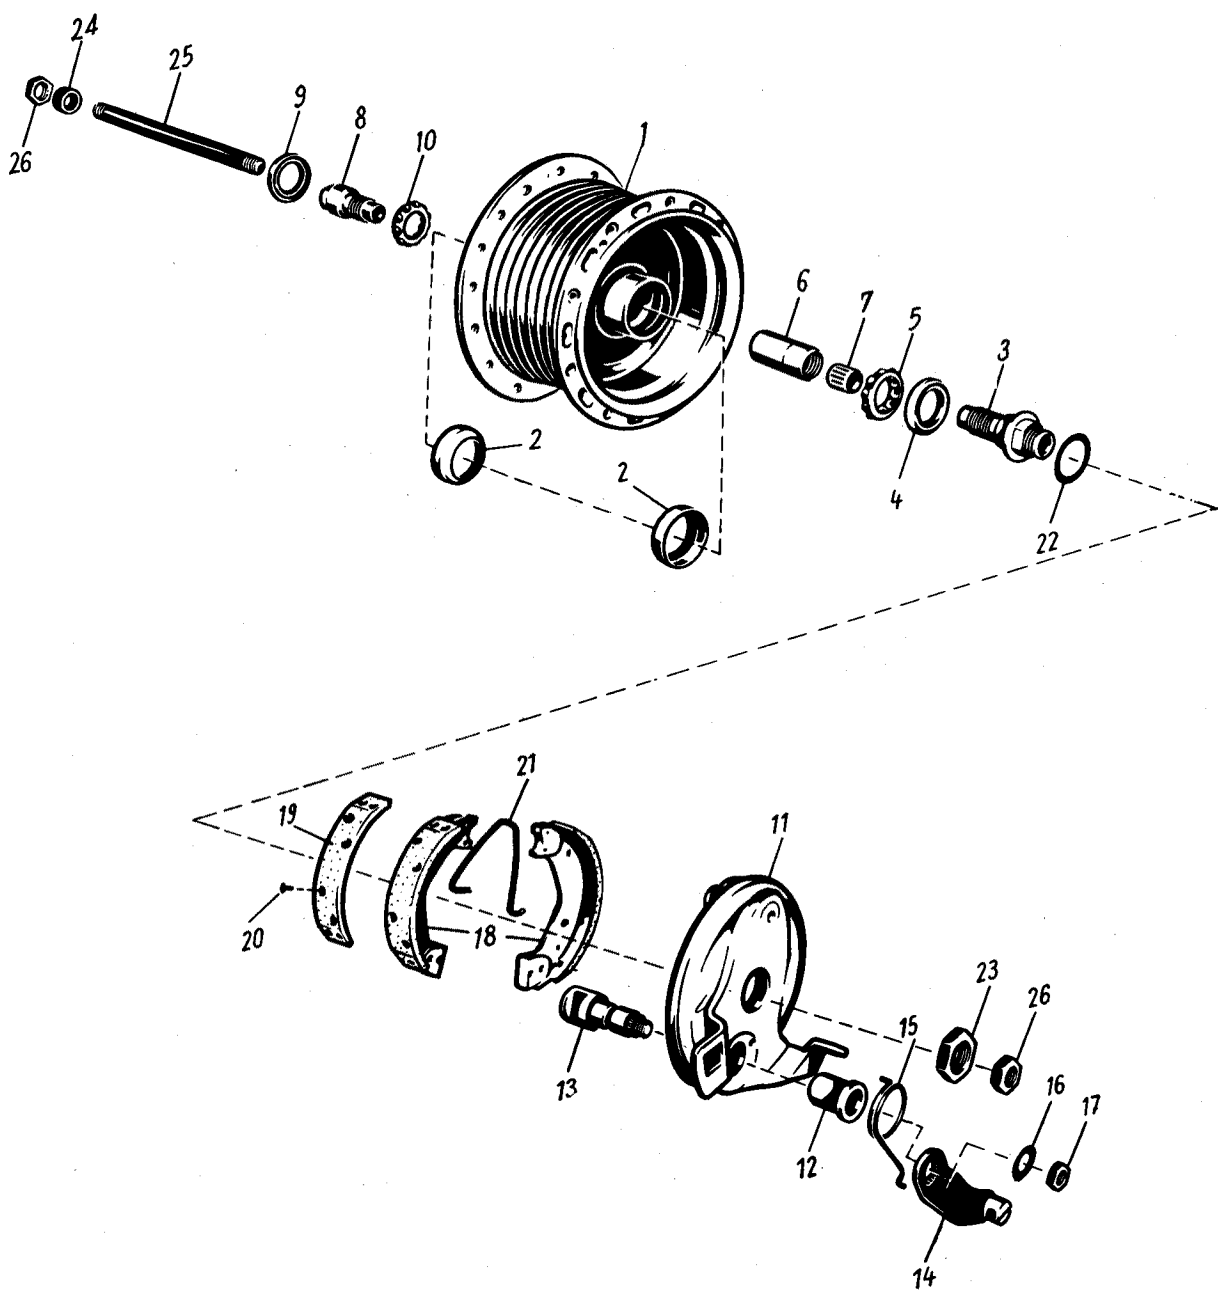


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
1 2 3 4 5 6				
Rear wheel w/o tyre and tube	16 52 90 525	1	→ 733 142 / 805 276, moreover alternatively with 16 52 90 529 733 143 / 805 277 → → 738 200 / 807 506)	—
Rear wheel w/o brake w/o tyre and tube	16 52 90 925	1		—
Hub	16 52 90 926	1		—
Hub	16 52 90 922	1		1
Sprocket	16 52 90 927	1	34 No of teeth	2
Lock plate	16 52 90 923	1		3
Screw	M 7x25 DIN 931	5		4
Nut	M 7 DIN 934	5		5
Rear wheel axle	16 52 90 924	1		6
Ball race	16 51 90 905	2		7
Ball	035 052 368	each 10	1/4" diam	8
Washer	16 51 90 914	2		9
Felt ring	16 51 90 912	2		10
Cap	16 51 90 911	2		11
Cone	16 52 90 909	2		12
Washer	16 52 90 910	3		13
Nut	16 51 90 913	3		14
Chain adjusting screw	16 52 90 912	2		15
Cap for adjusting screw	16 52 90 920	2		16
Nut	16 52 90 931	2		17
Washer	16 52 90 913	2		18
Nut	16 52 90 914	2		19
Rear wheel brake	16 52 90 915	1		20
Brake plate	16 52 90 916	1		21
Brake shoe, lower	16 52 90 928	1		22
Brake shoe, upper	16 52 90 906	1		—
Brake lining	16 52 90 908	2		23
Rivet	16 52 90 921	8		24
Spring	16 52 90 907	2		25
Brake spanner	16 52 90 917	1		26
Washer	16 52 90 918	1		27
Brake lever	16 52 90 919	1		28
Washer	6,4 DIN 125	1		29
Nut	M 6 DIN 934	1		30
Rim	16 51 90 078	1		—
Spoke	16 51 90 906	36		—
Nipple	16 51 90 915	36		—
Tyre	23—2,25	—	} not supplied	—
Inner tube	23—2,25	—		—
Well filler	23—2,00	—		—

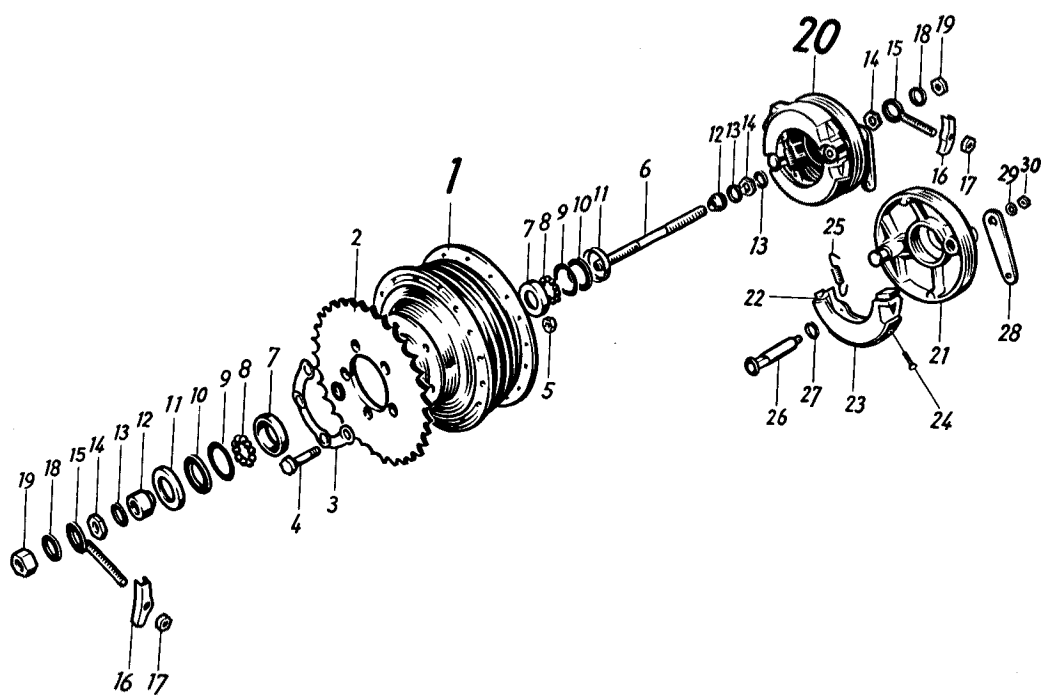


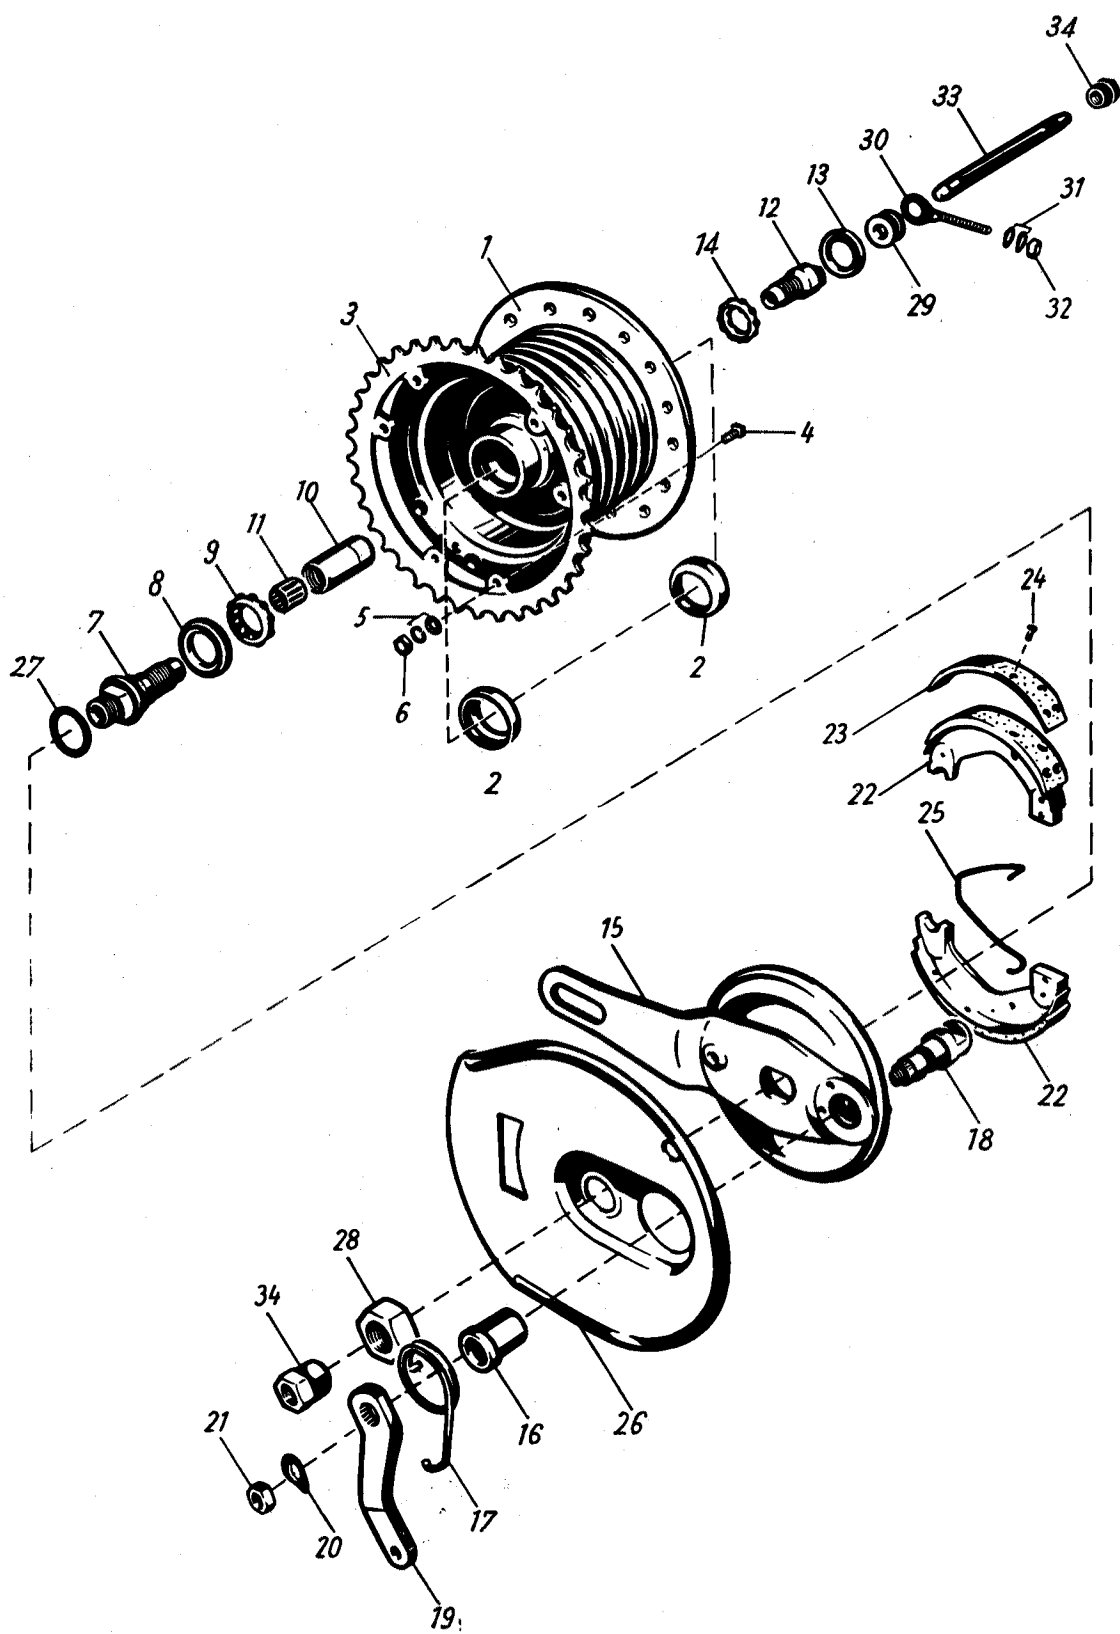

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
1 2 3 4				
Rear wheel w/o tyre and tube	16 52 90 529	1	(alternatively with 16 52 90 525 733 143 / 805 277 → → 738 200 / 807 506). 738 201 / 807 507 → only NSU-type	—
Rear wheel w/o brake w/o tyre and tube	16 52 90 929	1		—
Rim	16 51 90 078	1		—
Spoke	16 51 91 906	36	M 3x211 mm	—
Nipple	025 104 183	36	M 3	—
Rear wheel hub	16 52 00 531	1		—
Hub	16 52 04 900	1		1
Ball race	16 51 00 023	2		2
Sprocket	16 52 03 005	1	36 No of teeth	3
Screw	16 52 01 044	6		4
Spring ring	A 5 DIN 127	6		5
Nut	16 52 00 045	6		6
Cone	16 52 01 015	1		7
Seal ring	16 51 00 045	1	18x30,2x5 mm	8
Ball cage	16 51 00 044	1	1/4" diam	9
Spacer	16 52 02 017	1		10
Tolerance ring	16 52 00 037	1		11
Cone	16 52 01 016	1		12
Seal ring	16 51 00 045	1	18x30,2x5 mm	13
Ball cage	16 51 00 044	1	1/4" diam	14
Rear wheel brake	16 52 00 533	1		—
Brake plate	16 52 02 518	1		15
Bush	16 52 03 026	1	12x15x19 mm	16
Spring	16 52 03 021	1		17
Brake spanner	16 51 03 027	1		18
Brake lever	16 52 03 003	1		19
Spring washer	B 7 DIN 137	1		20
Nut	16 52 01 043	1		21
Brake shoe	16 51 02 509	2		22
Brake lining	16 52 01 034	2		23
Rivet	16 51 00 043	16		24
Spring	16 51 03 030	1		25
Cap	16 52 00 046	1		26
Shim	16 51 00 054	as req.	18,2x26x0,2; 0,2 mm	27
Shim	16 51 01 054	as req.	18,2x26x0,5 mm	—
Nut	16 52 01 049	1		28
Spacer	16 52 03 018	1	19,5 mm	29
Chain adjusting screw	16 52 00 011	2		30
Spacer	16 52 00 058	2		—
Spring washer	B 6 DIN 137	4		31
Nut	M 6 DIN 934	2		32
Spindle	16 52 02 014	1		33
Washer	10,5 DIN 125	2		—
Nut	16 51 00 036	2		34
Tyre	23—2,25	—	} not supplied	—
Inner tube	23—2,25	—		—
Well filler	23—2,00	—		—


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
Rear brake control cable	16 53 90 506	1	L = 85 mm L = 50 mm → 733 142 / 805 276 (moreover alternatively with brake pull rod 16 53 00 502 733 143 / 805 277 → → 738 200 / 807 506)	1
Hose	035 099 491	1		2
Hose	16 53 00 018	1		3
Yoke	16 53 00 013	2		4
Pivot pin	16 53 00 010	2		5
Washer	11 53 00 002	2		6
Clip	11 53 00 819	2		7
Sleeve	16 53 01 012	1		8
Brake rod	16 53 00 502	1	L = 505 mm 738 201 / 807 507 → (moreover alternatively with cable 16 53 90 506 733 143 / 805 277 → → 738 200 / 807 506)	9
Lock plate	025 100 655	1		10
Washer	125 059 963	1		11
Spring clip	11 53 00 819	1		12
Nut	16 53 01 003	1		13
Nut	M 5 DIN 934	1		14
Chain 106 links	16 54 90 900	1	→ 733 142 / 805 276 (moreover alternatively with chain 16 54 91 900 733 143 / 805 277 → → 738 200 / 807 506)	—
Chain 108 links	16 54 91 900	1		15
Connecting link	16 54 00 601	1	1 E 12,7x4,88 mm DIN 8180	16
Joggled link	16 54 00 603	1	1 C 12,7x4,88 mm DIN 8180	—
Chain mudguard	16 32 90 904	1		17
Washer	6,4 DIN 125	2		18
Spring ring	B 6 DIN 127	;		19
Screw	M 6x10 DIN 933	2		20

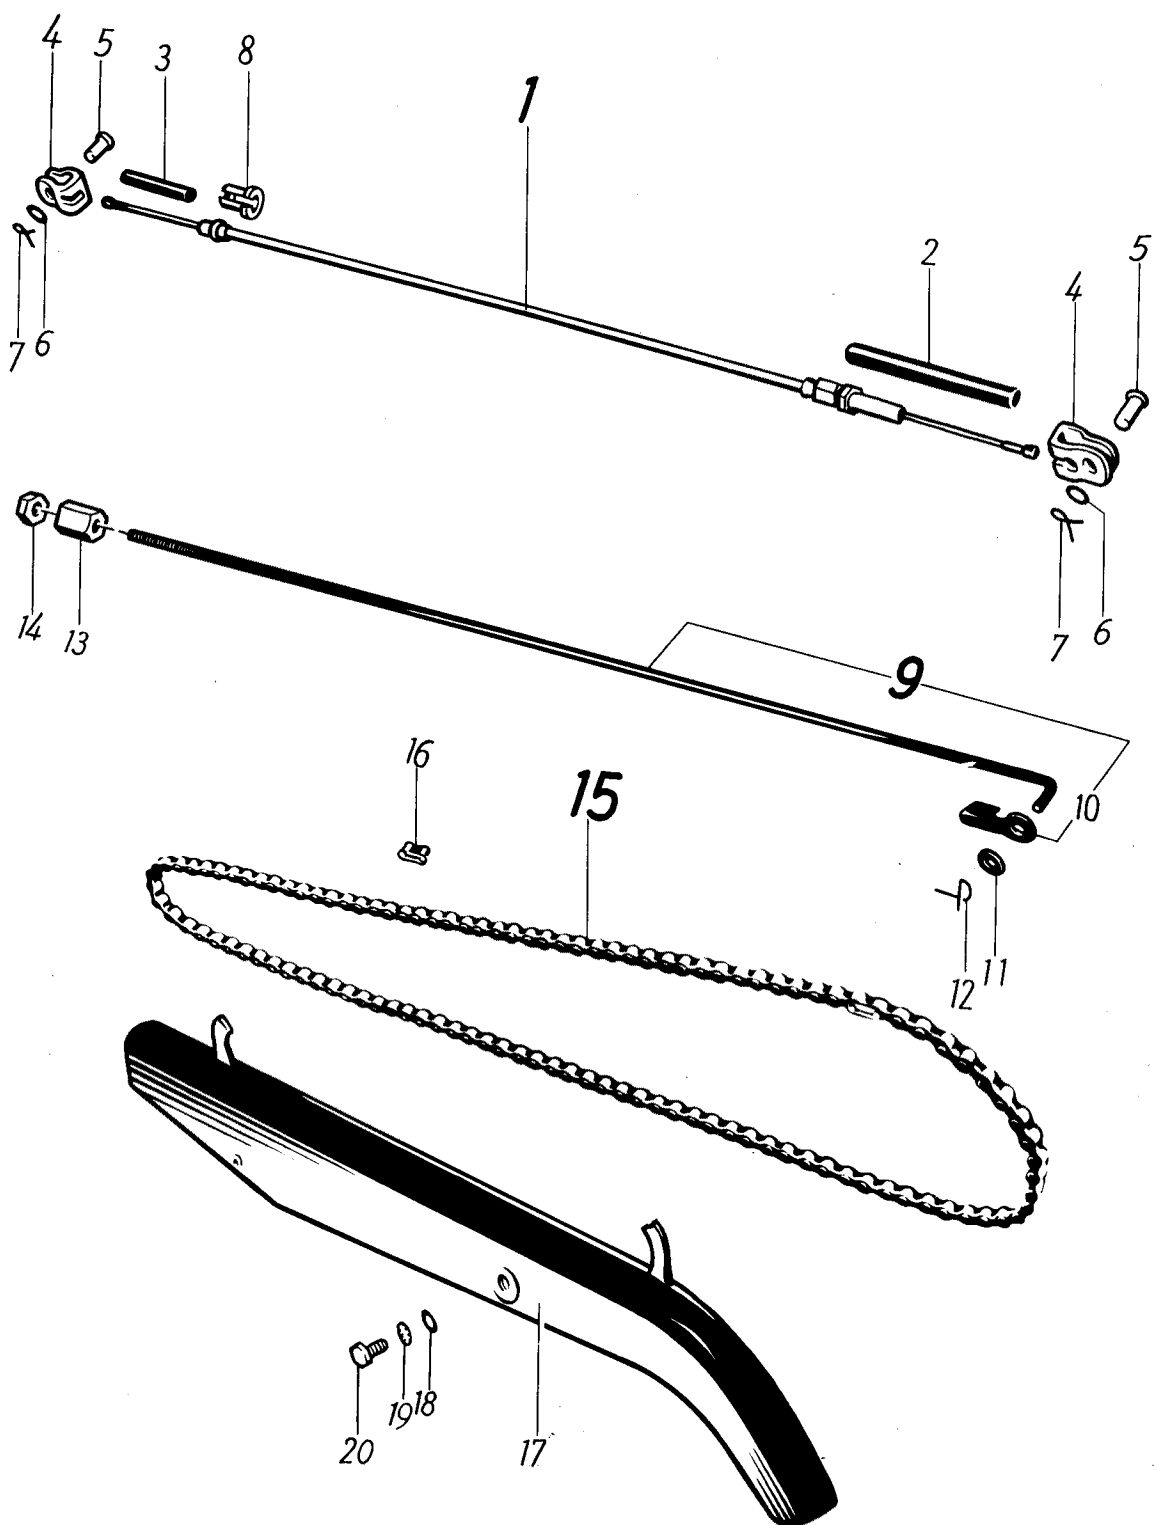


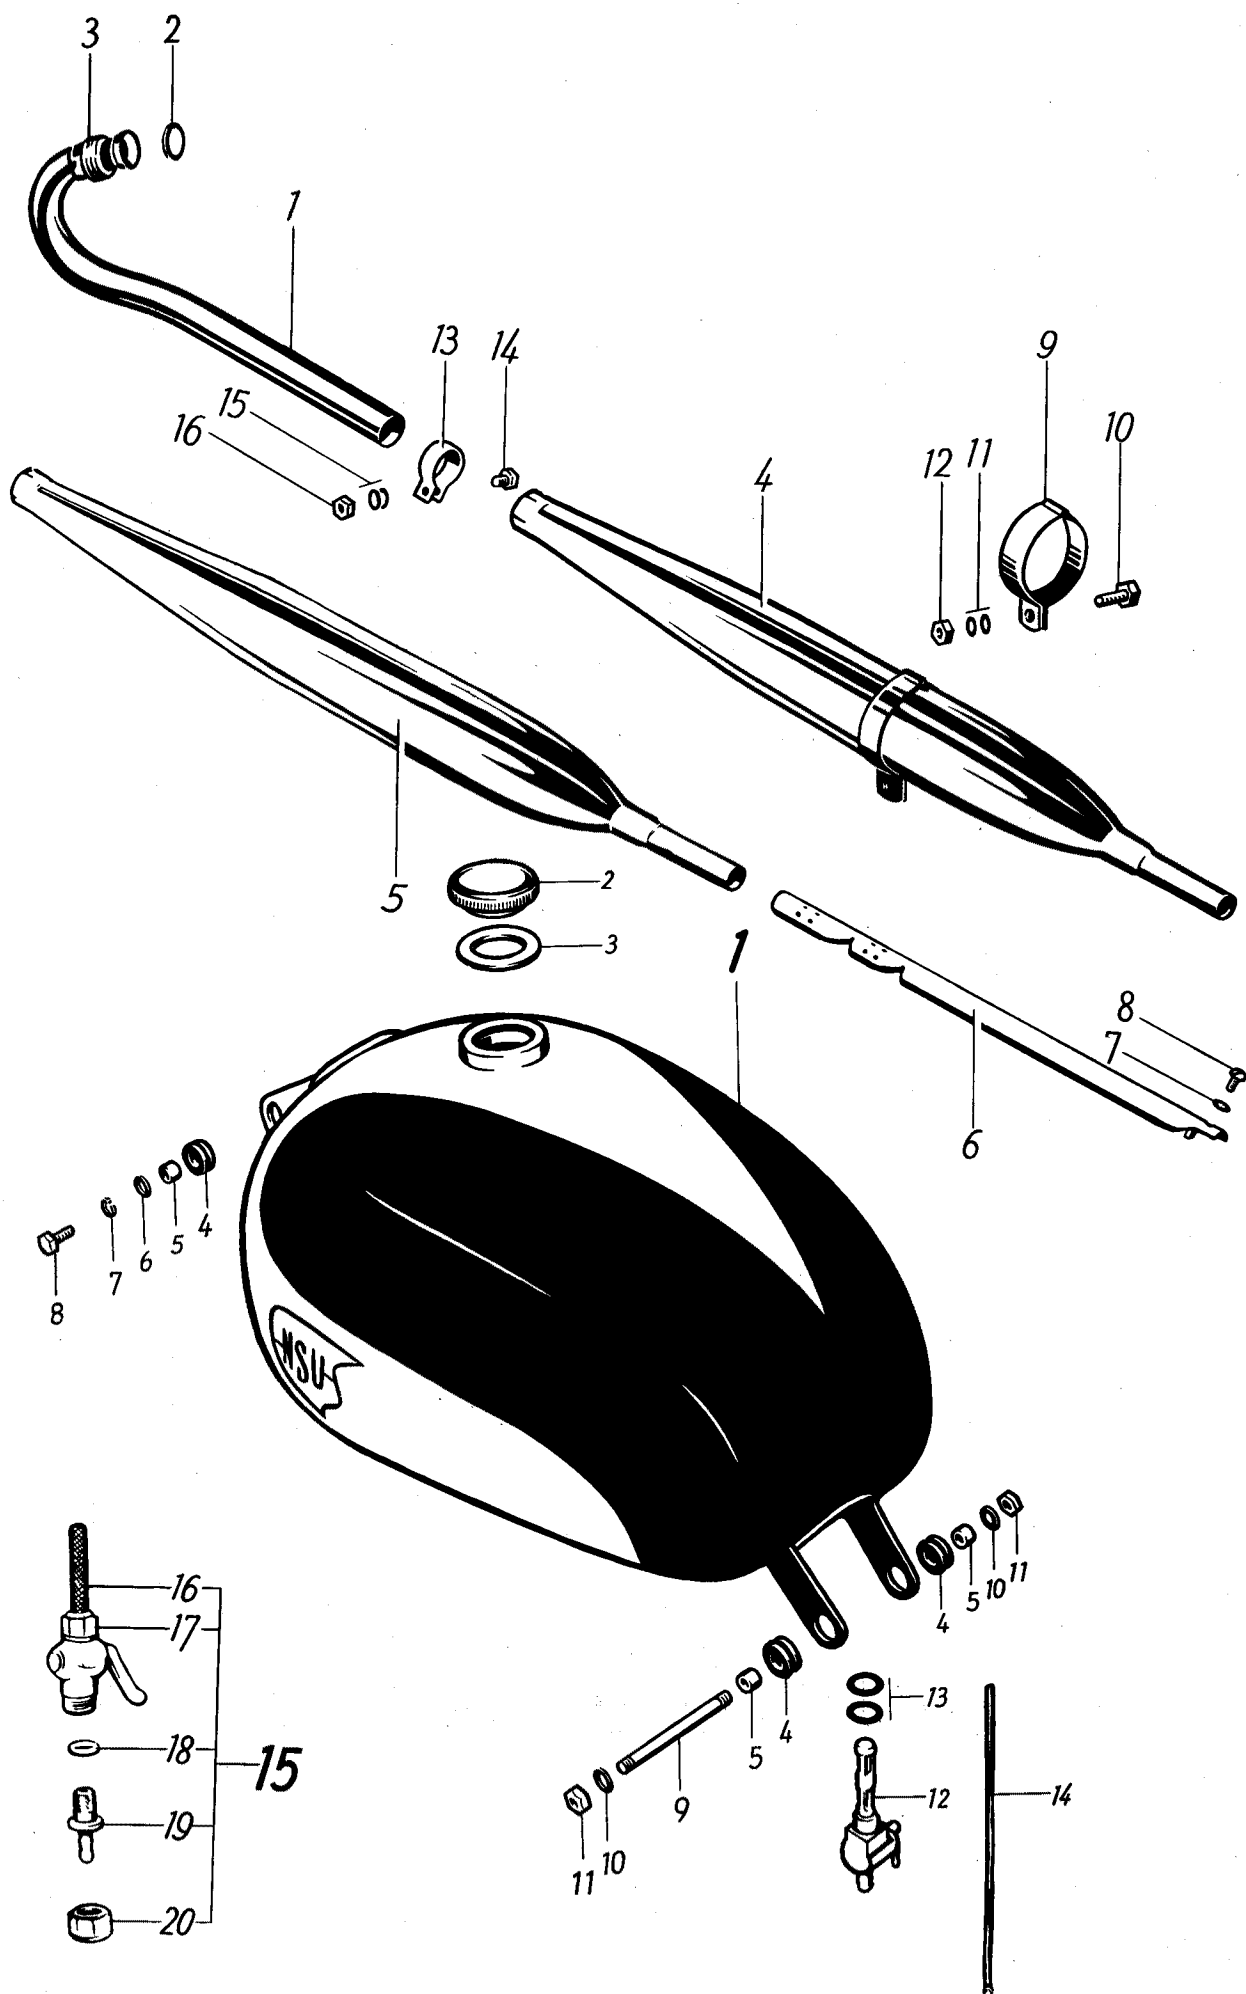

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
	1			
Exhaust pipe	16 71 02 005	1		1
Gasket	16 71 00 002	2		2
Union	16 71 00 001	1		3
Silencer assy	16 71 03 502	1		4
Silencer body	16 71 02 505	1		5
Baffle	16 71 01 009	1		6
Lock washer	J 4,3 DIN 6798	1		7
Screw	M 4x8 DIN 86	1		8
Silencer bracket	16 71 03 008	1		9
Screw	M 6x20 DIN 933	1		10
Spring washer	B 6 DIN 137	2		11
Nut	M 6 DIN 934	1		12
Clip	16 71 00 006	1		13
Screw	M 5x18 DIN 933	1		14
Spring washer	A 5 DIN 137	2		15
Nut	M 5 DIN 934	1		16
Fuel tank	16 72 90 510	1	→ 739 860 / 807 885	1
Fuel tank	16 72 91 510	1	739 861 / 807 886 → when ordering a fuel tank for a vehicle prior to the above no. include also fuel tap 16 72 01 505	—
Filler cap	16 72 01 504	1		2
Gasket	16 72 00 024	1		3
Transfer	16 72 90 039	2		—
Base	083 872 018	1		—
Rubber sleeve	11 44 00 032	4		4
Spacer ring	16 72 90 908	4		5
Washer	6,4 DIN 125	2		6
Spring ring	B 6 DIN 127	2		7
Screw	M 6x18 DIN 933	2		8
Screw	M 7x68 DIN 931	1		9
Washer	7,4 DIN 125	2		10
Nut	M 7 DIN 934	1		11
Fuel tap	16 72 90 516	1	→ 739 860 / 807 885	12
Seal ring	A 10x14 DIN 7603	2		13
Hose	033 109 155	1	L = 200 mm	14
Sleeve	023 104 269	2		—
Fuel tap	16 72 01 505	1	739 861 / 807 886 →	15
Strainer	16 72 00 905	1		16
Seal ring	16 72 00 903	1		—
Nut	16 72 00 904	1		17
Seal ring	16 72 00 901	1		18
Connector	16 72 00 900	1		19
Nut	16 72 00 902	1		20


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
1 2 3				
Headlamp with dipper switch and horn button	16 81 90 529	1		1
Headlamp , adapter	16 81 50 945	1		2
Glass retainer ring	16 81 54 914	1		3
Lens	16 81 54 915	1		4
Spring	16 81 50 944	3		5
Reflector	16 81 54 923	1		6
Spring	16 81 50 946	1		—
Spring	16 81 50 947	1		—
Socket	16 81 50 948	1		—
Screw	M 4x5x1,6 DIN 922	4		—
Screw	M 2,6x6 DIN 84	1		—
Bulb for headlamp	016 096 826	1		11
Switch lever	16 81 52 905	1		12
Insulation plate	16 81 50 933	1		13
Contact-plate	16 81 51 920	1		14
Contact bridge	16 81 51 906	1		15
Spring	16 81 51 907	1		16
U-Washer	16 81 51 908	1		17
Split pin	1x15 DIN 94	1		18
Spring washer	B 8 DIN 127	2		19
Screw	M 8x12 DIN 933	2		20
Rubber ring for cable	16 81 51 912	2		21
Rubber ring for flexible drive	16 81 50 934	1		22
Angle	16 81 50 910	1		23
Spring washer	A 4 DIN 137	1		24
Knurled screw	16 81 50 911	1		25
Dipswitch and horn button	16 81 50 904	1		—
Strap for dipswitch	16 81 50 927	1		—
Lead	16 81 50 903	1		—
Tail lamp	16 81 02 502	1		—
Terminal screw	16 81 50 932	1		—
Cap	16 81 51 901	1		26
Screw for cap	16 81 51 900	1		27
Spring clip	16 81 50 941	1		28
Rubber pead	16 81 02 002	1		29
Lock washer	A 5,3 DIN 6798	1		30
Nut	M 5 DIN 934	1		31
Bulb	026 104 311	1	H 6 V 2 W	—
Cable harness	16 81 90 528	1		—
Protective sleeve	16 81 00 012	1		—
Cable: (engine-headlamp)	16 81 00 007	1		—
Cable: (headlamp-rearlamp)	16 81 01 001	1		—

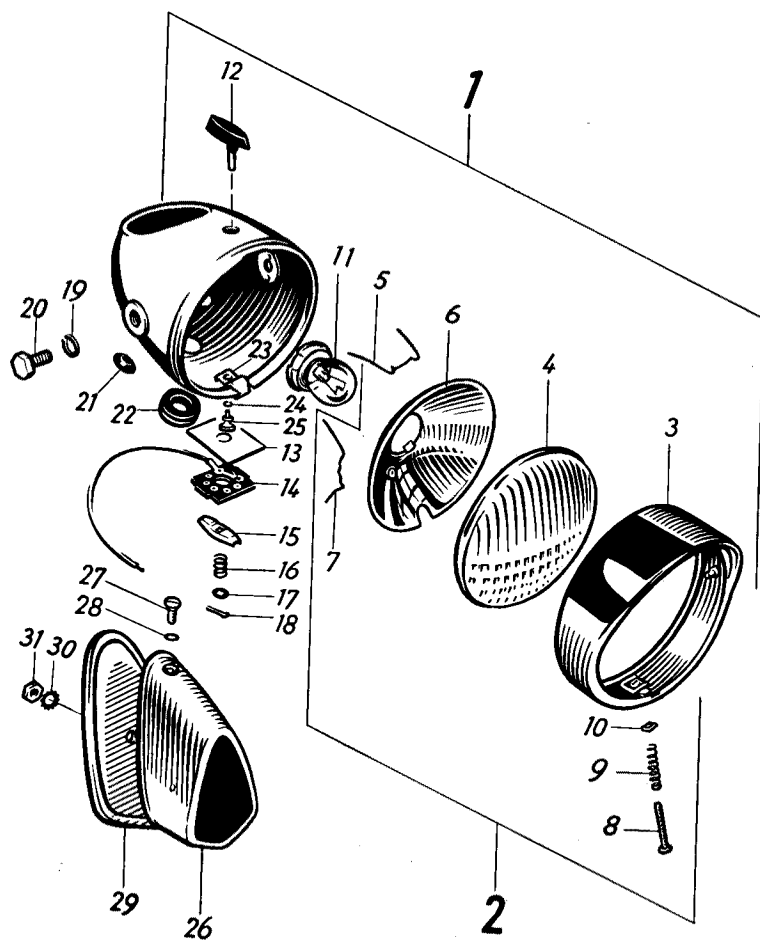

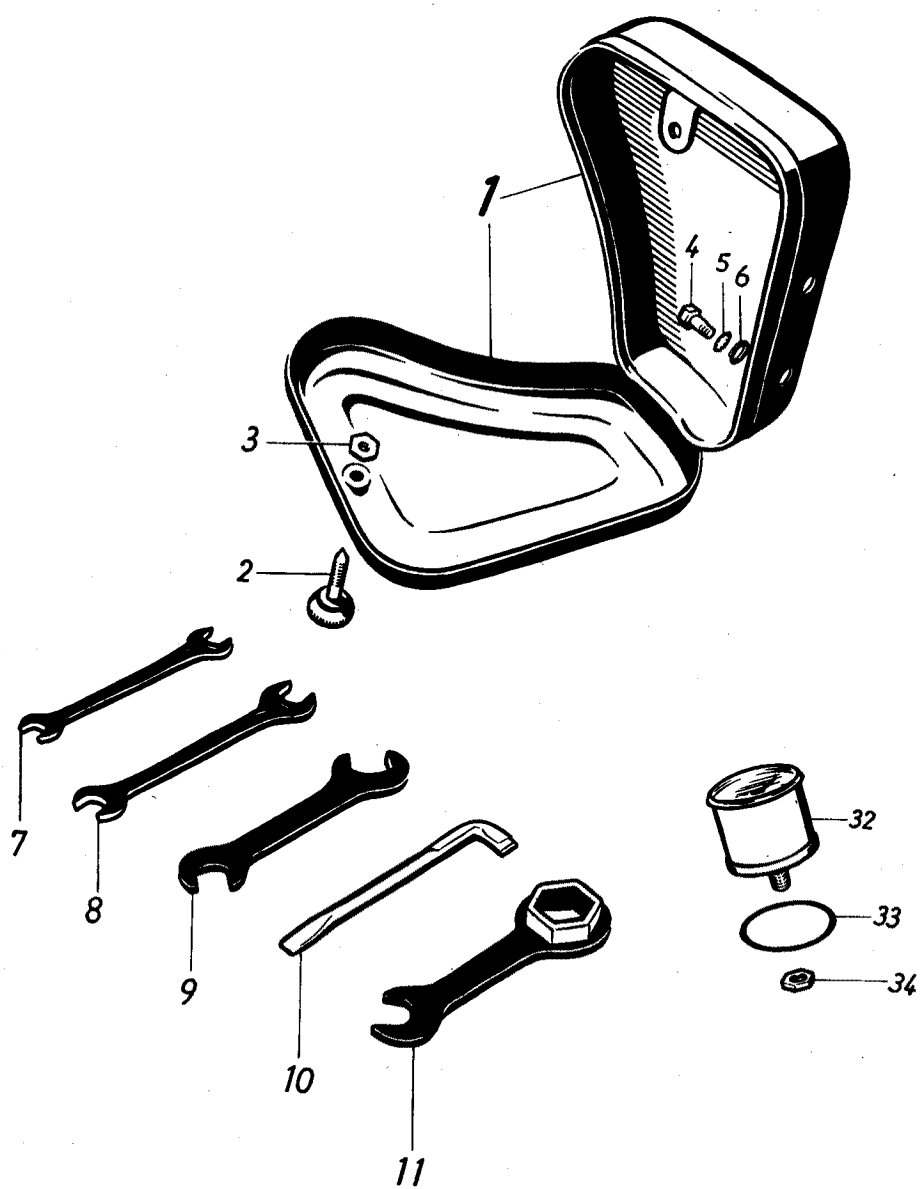


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY Cavallino				
Tool box	16 73 90 504	1		1
Screw for lid	16 73 90 902	1		2
Nut	16 73 90 903	1		3
Screw	M 6x12 DIN 933	2		4
Spring ring	B 6 DIN 127	2		5
Washer	6,4 DIN 125	2		6
Tool kit	16 91 90 920	1	→ 733 142 / 805 276 (moreover alternatively with 16 91 00 900 733 143 / 805 277 → → 738 200 / 807 506)	—
Spanner	11 91 00 600	1	8x9 mm	7
Spanner	11 91 00 601	1	10x11 mm	8
Spanner	16 91 01 004	1		9
Screw driver	16 91 00 003	1		10
Spark plug spanner	16 91 00 002	1		11
Tool kit	16 91 00 900	1	738 201 / 807 507 → (moreover alternatively with 16 91 90 920 733 143 / 805 277 → → 738 200 / 807 506)	—
Spanner	16 91 00 004	1		—
Spanner	11 91 00 600	1	8x9 mm	—
Spanner	11 91 00 601	1	10x11 mm	—
Screw driver	16 91 00 003	1	} s. Illustr. No 7, 8, 10, 11	—
Spark plug spanner	16 91 00 002	1		—
Tommy bar	16 91 00 005	1	7 mm diam L = 118 mm	—
Tyre inflation pump	16 93 01 502	1		—
Speedometer (M. P. H.)	16 92 90 509	1		32
Gasket ring	16 92 91 909	1		33
Nut	16 92 90 910	1		34
Speedometer drive	16 92 90 508	1	L = 700 mm	—
Speedometer drive gear	16 92 90 507	1	→ 733 142 / 805 276 (moreover alternatively with 16 92 91 507 733 143 / 805 277 → → 738 200 / 807 506)	—
Speedometer drive gear	16 92 91 507	1	738 201 / 807 507 → (moreover alternatively with 16 92 90 507 733 143 / 805 277 → → 738 200 / 807 506)	—
Luggage carrier	16 93 90 904	1	} optional	—
Pillion footrests	16 93 90 906	1 Pair		—


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
Frame	29 31 00 900	1		1
Steering head race	023 103 927	2		2
Nameplate	29 31 00 020	1	{ not supplied without stamped number	3
Grooved stud	2x3 DIN 1476	2		—
Steering-head lock	29 31 00 504	1	{ order spare keys from manufacturer	4
Rivet	5x32 DIN 660	1		5
Rear fork	29 32 00 501	1		6
Ring	29 32 00 027	2		7
Axle pin	29 32 00 508	1		8
Spring ring	A 14 DIN 127	1		9
Nut	M 14x1,5 DIN 936	1		10
Bush	29 41 00 013	2		11
Front mudguard	29 33 00 501	1		12
Nut	M 8 DIN 557	2	for swinging link mounting	13
Numberplate	16 33 00 010	1		—

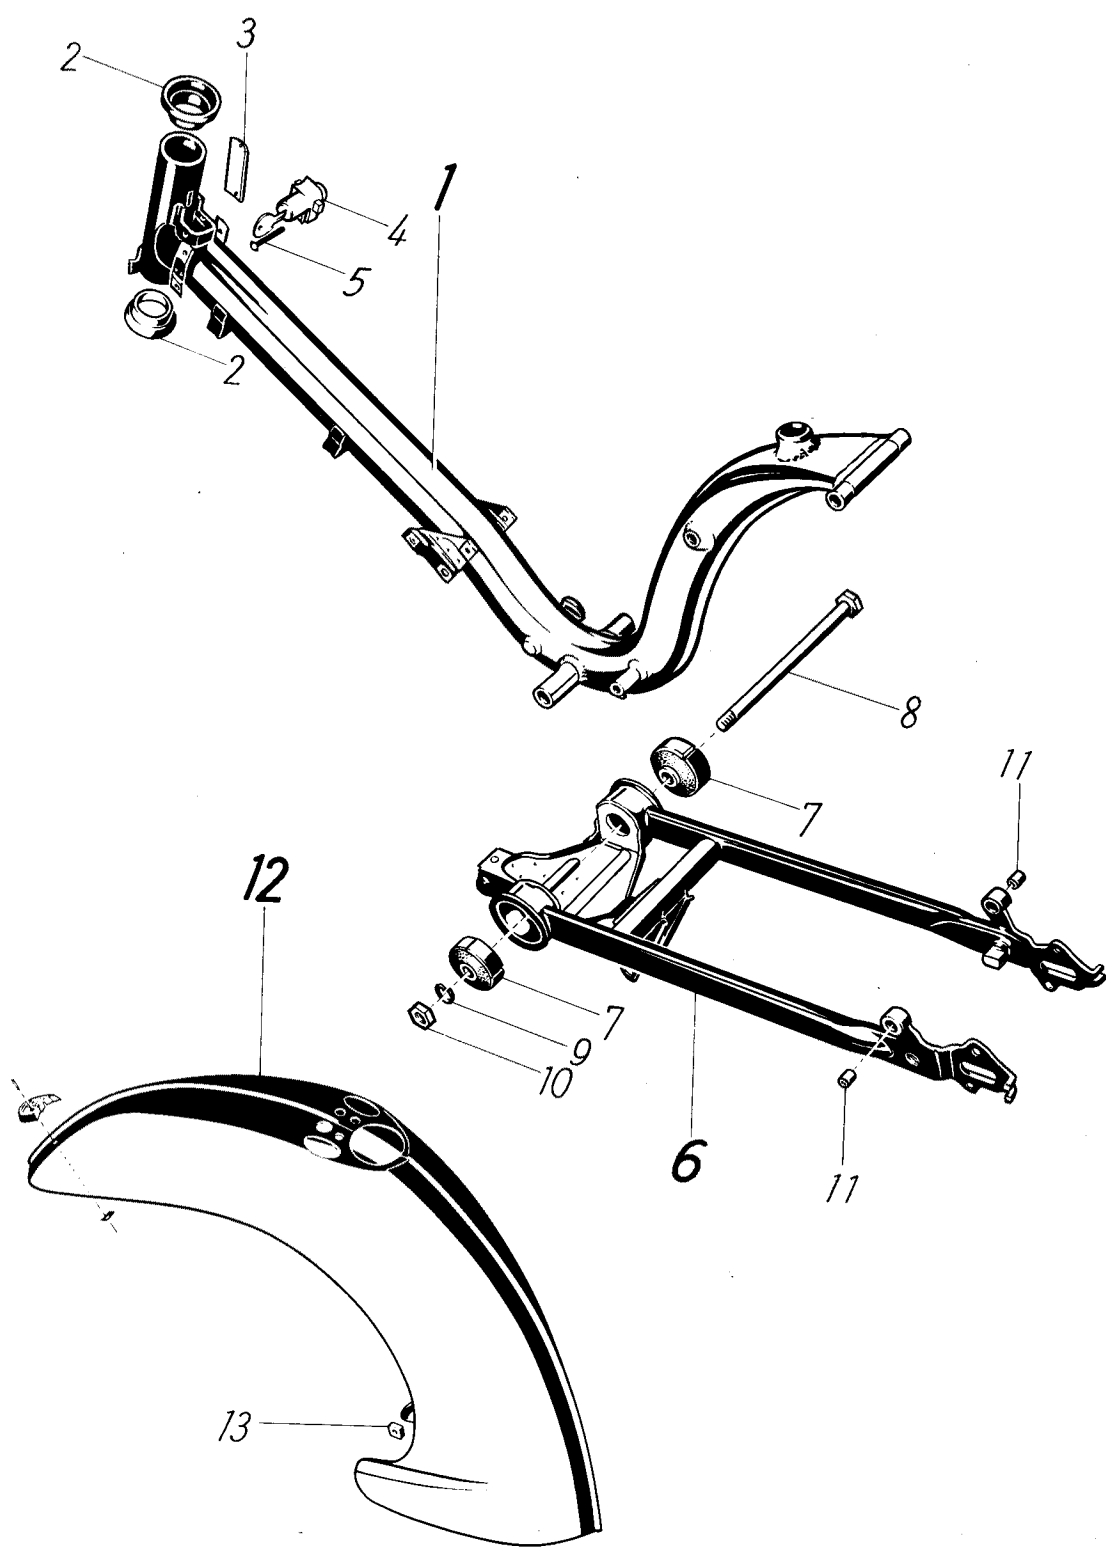


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
Centre stand	29 35 00 501	1	not supplied → 2 906 849 / 2 906 882	1
Bolt	29 35 00 005	1		2
Spring ring	B 8 DIN 127	1		3
Nut	M 8 DIN 934	1		4
Centre stand	29 35 01 501	1	2 906 850 / 2 906 883 → for vehicles prior to 2 906 850 / 2 960 883 mounting parts should be ordered with this part	—
Bolt	29 35 01 005	2		—
Spring washer	B 12 DIN 137	2		—
Spring washer	B 10 DIN 137	2		—
Nut	M 10x1 DIN 936	2		—
Spring	29 35 00 504	1		5
Spring	29 35 00 009	2		6
Clevis link	29 35 00 010	1		7
Rivet	5x12 DIN 660	1		8
Spring washer	B 6 DIN 137	2		9
Screw	M 6x12 DIN 933	1		10
Carrier	29 36 00 501	1		11
Screw	M 10x1x75 DIN 960	1		12
Screw	M 10x1x115 DIN 960	1		13
Spring washer	A 10 DIN 137	4		14
Nut	M 10x1 DIN 936	2		15
Pedal w/reflector	—		s. page 7, Illustr. No. 38	—
Pillion footrest	29 37 00 501	2		16
Spring ring	B 10 DIN 127	2		17
Nut	M 10 DIN 934	2		18
Carrier	29 37 00 001	2		19
Washer, right	29 37 00 003	1		20
Spring washer	B 12 DIN 137	2		21
Screw	29 37 00 002	2		22
Seat cushion	29 38 00 503	1	L = 43 mm L = 36 mm L = 30 mm	23
Spring	29 38 00 902	5		—
Spring	29 38 00 903	10		—
Spring	29 38 00 905	2		—
Spring	29 38 00 015	1		24
Spring washer	B 6 DIN 137	8		25
Screw	M 6x15 DIN 933	3		26
Screw	29 38 00 012	1	L = 131 mm	27
Pillion seat cushion	29 38 00 502	1		28
Spring ring	A 6 DIN 127	4		29
Nut	M 6 DIN 934	4		30
Spring	29 38 00 904	9		—
Grip handle	29 38 00 900	1		—
Spacing washer	29 38 00 901	2		—
Screw	AM 5x20 DIN 88	2		—
Lock washer	J 5,3 DIN 6798	2		—
Nut	M 5 DIN 934	2		—

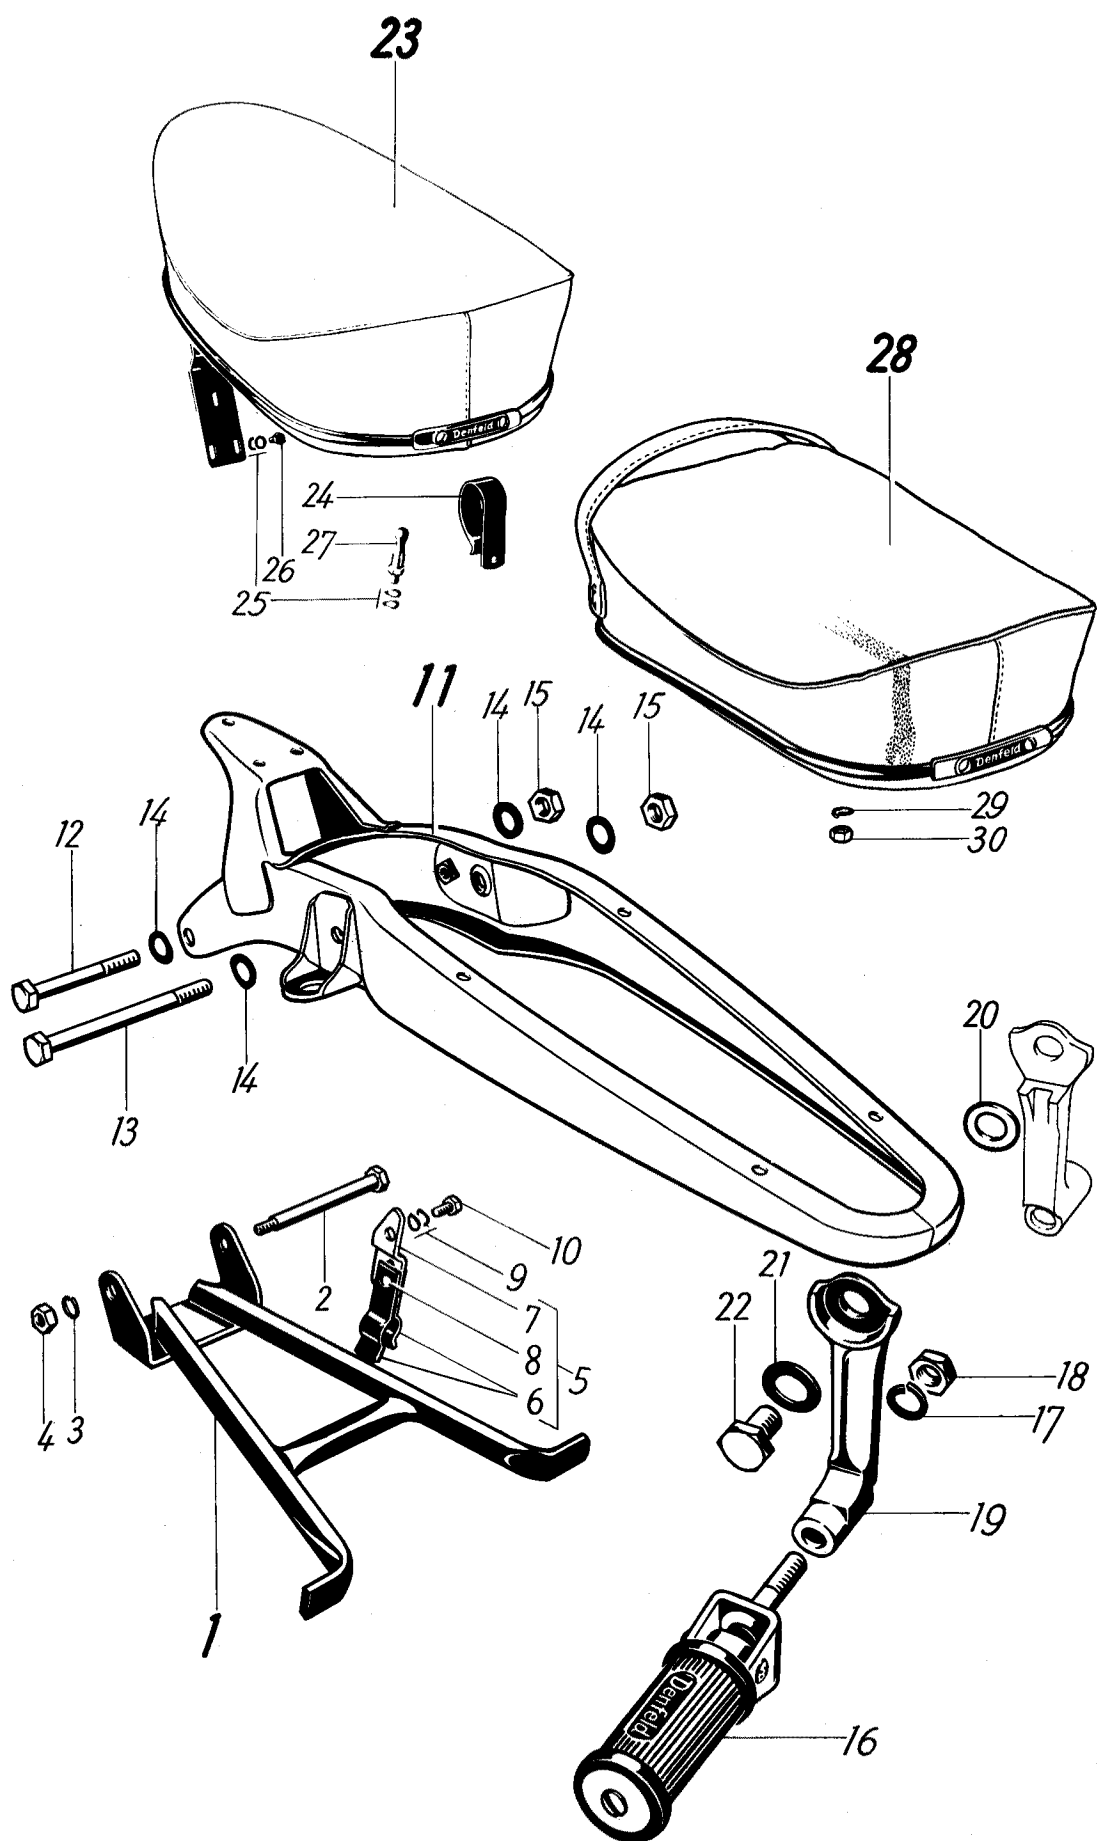


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1			
Holding tube, left	29 39 00 515	1		1
Holding tube, right	29 39 00 517	1		2
Screw	M 6x15 DIN 933	2		3
Nut holder	29 39 00 518	2	Clips M 6	4
Frame tube lagging, left	29 39 00 002	1		5
Frame tube lagging, right	29 39 00 001	1		6
Countersunk screw	B 4,2x19 DIN 7973	2	{ for fixing of holding tube left and right	7
Countersunk screw	B 4,2x13 DIN 7973	6		8
Washer	29 39 00 029	8		9
Snap nut	29 39 00 028	8		10
Engine cowl, left	29 39 00 900	1		11
Wing nut	018 096 618	1		12
Engine cowl, right	29 39 00 511	1	{ on vehicles prior to 2 906 712 / 2 906 956 the thrust pin of the carburettor must be short ened by 31,5 mm or be replaced by thrust pin 16 16 00 924 s. page 9	13
Spring	29 39 00 034	1	{ only for repair	13a
Rivet	3x6 DIN 660	2		—
Biseing element, front	29 39 00 507	2		14
Biseing element, rear	29 39 00 508	2		15
Rear cowling	29 39 00 901	1	{ for vehicles prior to 2 914 830 / 2 914 598 order also tail light, 29 81 01 501 electric bulb H 6 V 2 W 29 81 01 501 washer 29 81 01 002 base plate 29 81 00 005, threaded union 29 81 00 008 Lock washer A 4,3 DIN 6798, s. page 98	16
Grille	—	1	{ s. page 96 Illustr. No. 5-9	—
Pin	—	2		—
Pin	—	4		—
Spring nut	—	6		—
Emblem	—	1		—
Screw	M 8x190 DIN 931	1		17
Spring washer	A 8 DIN 137	2		18
Nut	M 8 DIN 934	1		19
No. plate cover	29 81 00 007	1	{ → 2 914 829 / 2 914 597	20
Adhesive stripe	29 39 00 032	1		—
Rubber plug	11 40 00 031	1		21
Rubber plug	26 32 00 027	4		22
Spring washer	B 4 DIN 137	4	{ for number plate fixing	23
Cheese head screw	AM 4x10 DIN 85	2		24

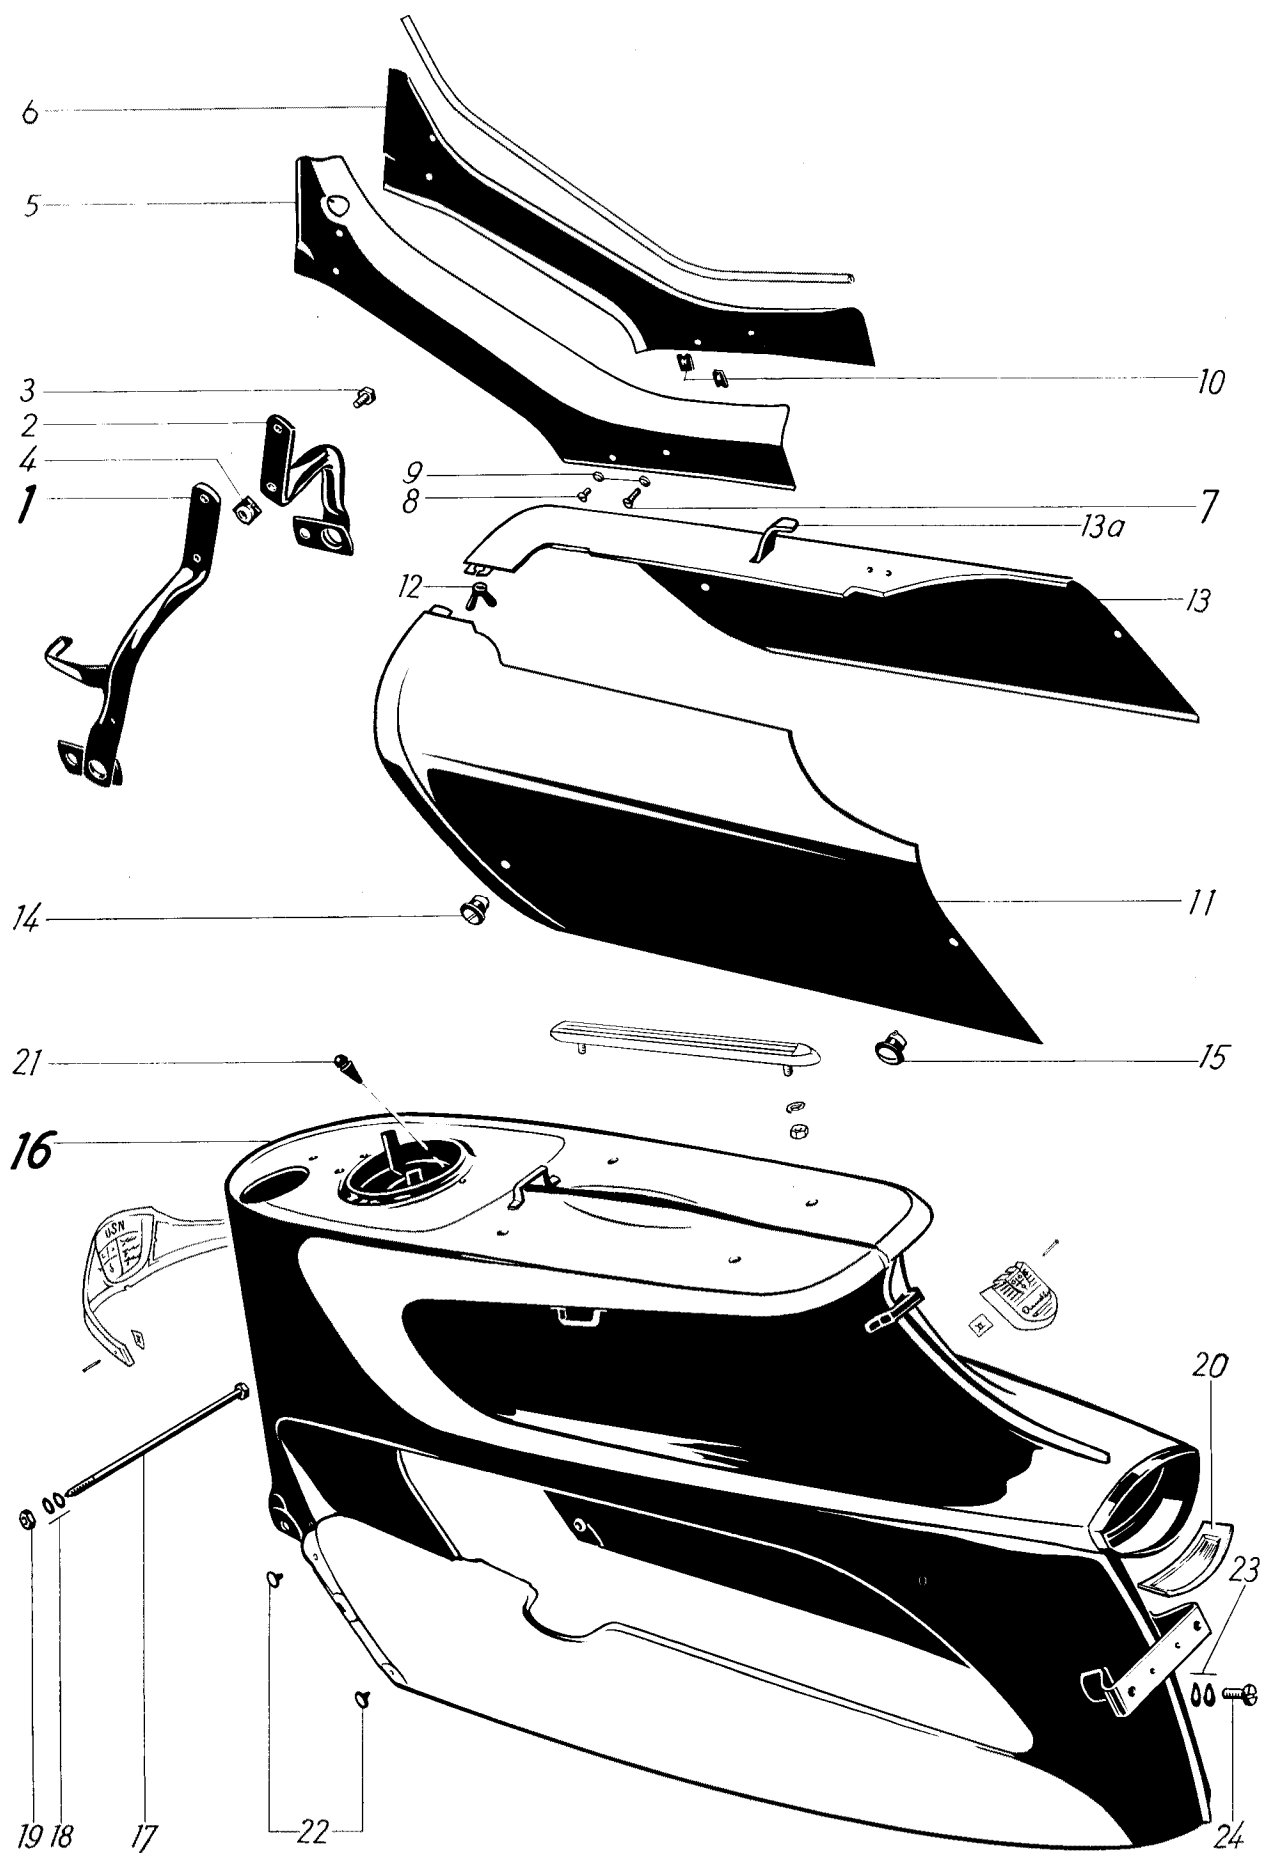


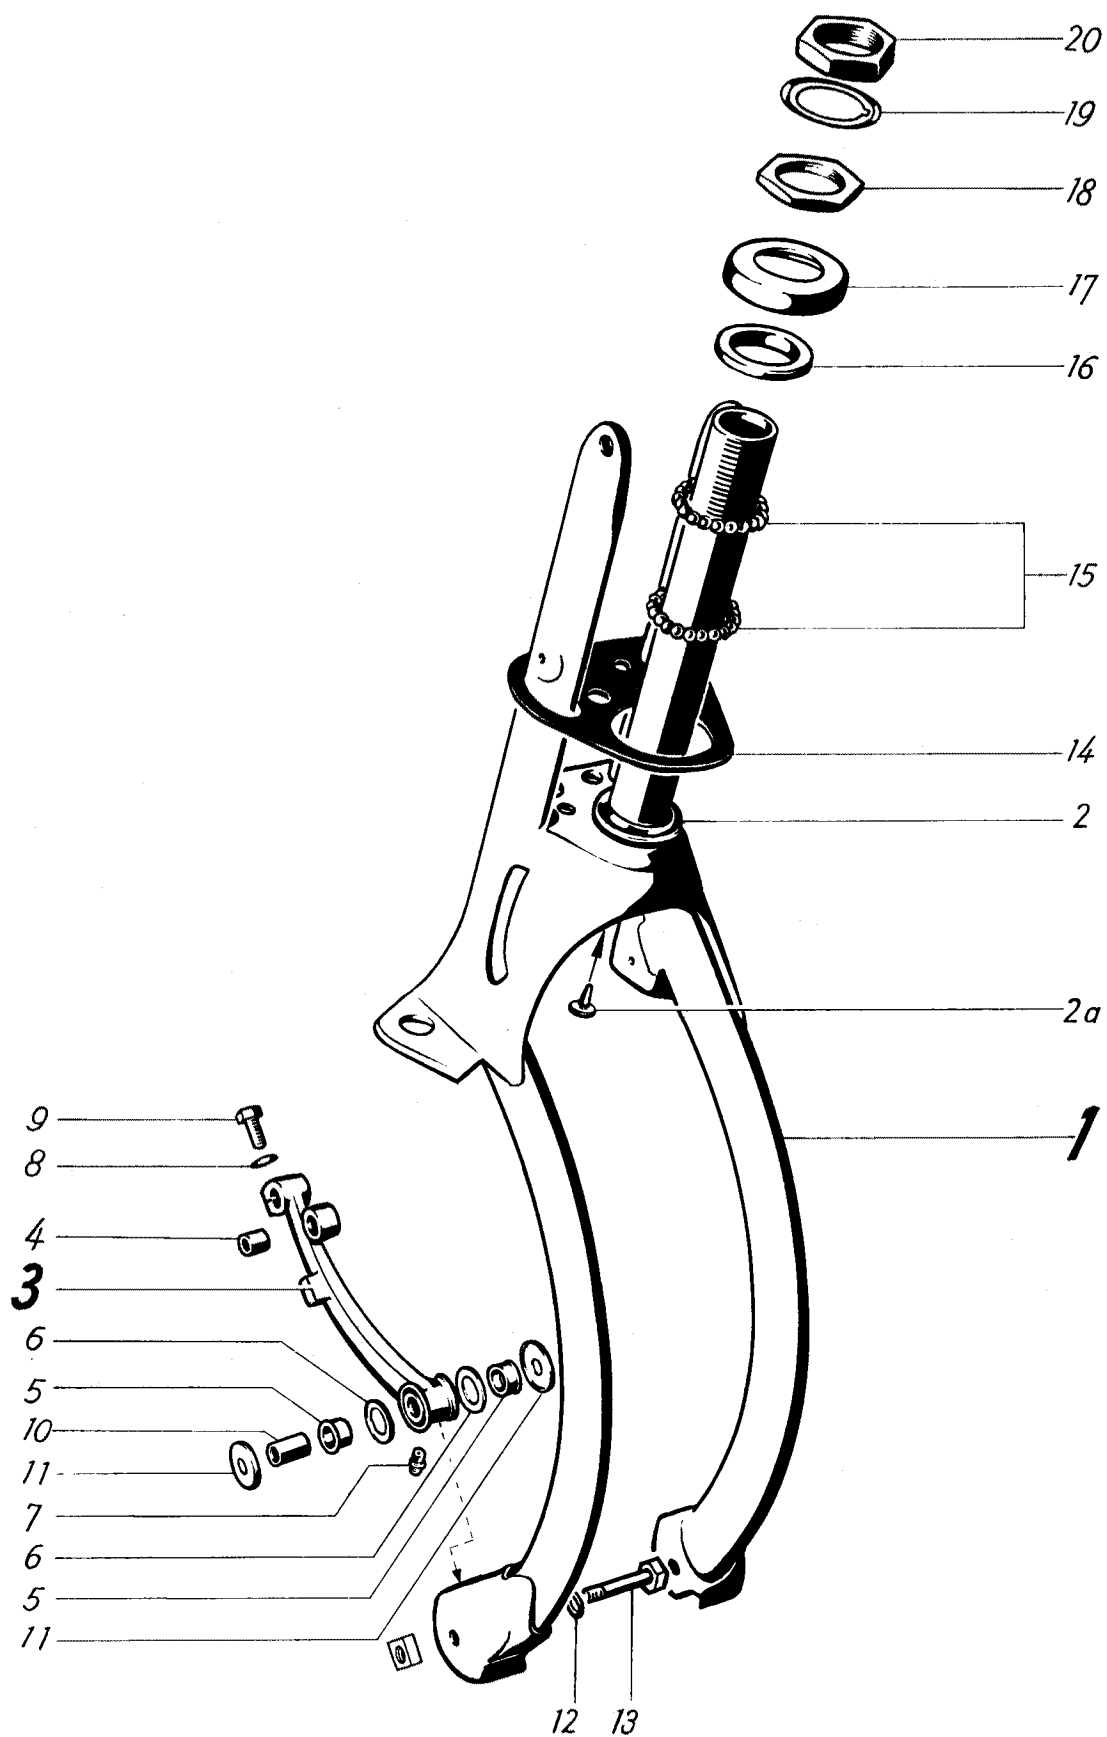

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
1 2				
Spring fork	29 41 00 900	1	with Front wheel suspension	—
Spring fork	29 41 00 901	1		1
Cone, bottom	044 412 131	1		2
Rubber plug	26 32 00 027	1		2a
Swinging link	29 41 00 506	2		3
Bush	29 41 00 013	2		4
Bush	16 41 01 056	4		5
Cap inner	16 41 00 081	4		6
Grease nipple	D 6 DIN 3402	2		7
Spring washer	A 8 DIN 137	2		8
Bolt	16 41 00 045	2		9
Bush	16 41 00 055	2		10
Cap outer	16 41 00 080	4		11
Spring ring	A 8 DIN 127	2		12
Bolt	29 41 00 016	2		13
Front wheel suspension	—	—	s. page 95, Illustr. No. 10-26	—
Square nut	—	—	s. page 84, Illustr. No. 13	—
Cover plate, left	—	—	s. page 96, Illustr. No. 14-17	—
Cover plate, right	—	—		—
Spring washer	—	—		—
Bolt	—	—		—
Plate	29 41 00 015	1	Rubber	14
Ball	024 049 962	each 21	5 mm diam	15
Cone	024 103 928	1		16
Cover	024 103 929	1		17
Nut	074 742 006	3	{ → 2 906 609 / 2 906 862 s. Illustr. No. 18	—
Nut	074 742 006	1	{ 2 906 610 / 2 906 863 →	18
Lock plate	16 41 00 051	1		19
Nut	29 41 00 018	1		20


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2 3 4			
Handlebar assy	29 43 00 508	1	vor vehicles prior to 2 906 610/2 906 863 order also these nut 29 41 00 018 and lock plate 16 41 00 051 s. page 87	—
Handlebar tube	29 43 00 502	1		1
Throttle twistgrip	29 43 00 507	1		—
Twistgrip housing	29 44 00 909	1		3
Adjusting screw	16 44 01 922	1		4
Nut	BM 5 DIN 439	1		5
Brake spring	29 44 00 911	1		6
Spring	29 44 00 912	1		7
Grup screw	11 44 00 910	1		8
Brake lever	29 44 00 910	1		9
Bolt	16 44 00 903	1		10
Lock washer	J 5,3 DIN 6797	1		11
Nut	M 5 DIN 934	1		12
Lock washer	J 5,3 DIN 6797	1		13
Slider	024 106 412	1		17
Washer	16 44 01 921	1		18
Twist grip sleeve	16 44 02 901	1		19
Rubber grip	16 44 02 904	1		—
Gear change twistgrip	29 43 01 506	1		20
Twistgrip housing	29 44 00 900	1		21
Screw	11 44 00 910	1		22
Lock washer	J 5,3 DIN 6797	1		23
Release lever	16 44 01 909	1	→ 2 909 059 / 2 909 120	24
Release lever	16 44 03 909	1	2 909 060 / 2 909 121 →	—
Spring washer	16 44 01 923	1		25
Bolt	M 5x8 DIN 923	1		26
Support	29 44 00 908	1		27
Screw	AM 3x8 DIN 63	1		28
Grip	29 44 00 903	1		29
Stirrup	16 44 00 910	1		30
Clutch lever	16 44 01 907	1		31
Bolt	16 44 00 908	1		32
Lock washer	J 5,3 DIN 6797	1		33
Nut	M 5 DIN 934	1		34
Cable bracket	29 44 00 907	1		35
Slider	29 44 00 905	1		36
Slider	29 44 00 906	1		37
Twist grip sleeve	29 44 00 901	1		38
Rubber grip	014 110 027	1		—
Cap	29 44 00 904	1		39
Screw	11 44 20 992	1		40
Bolt	M 8x18 DIN 933	2		41
Spring ring	B 8 DIN 127	2		42
Nut	M 8 DIN 934	2		43
Handlebar cowlings				
lower	29 43 00 005	1		44
Handlebar cowlings				
upper	29 43 00 004	1		45
Screw	AM 6x15 DIN 91	2		46
Screw	AM 5x18 DIN 91	6		47
Rubber moulding, left	29 43 00 006	1		48
Rubber moulding, right	29 43 00 007	1		49

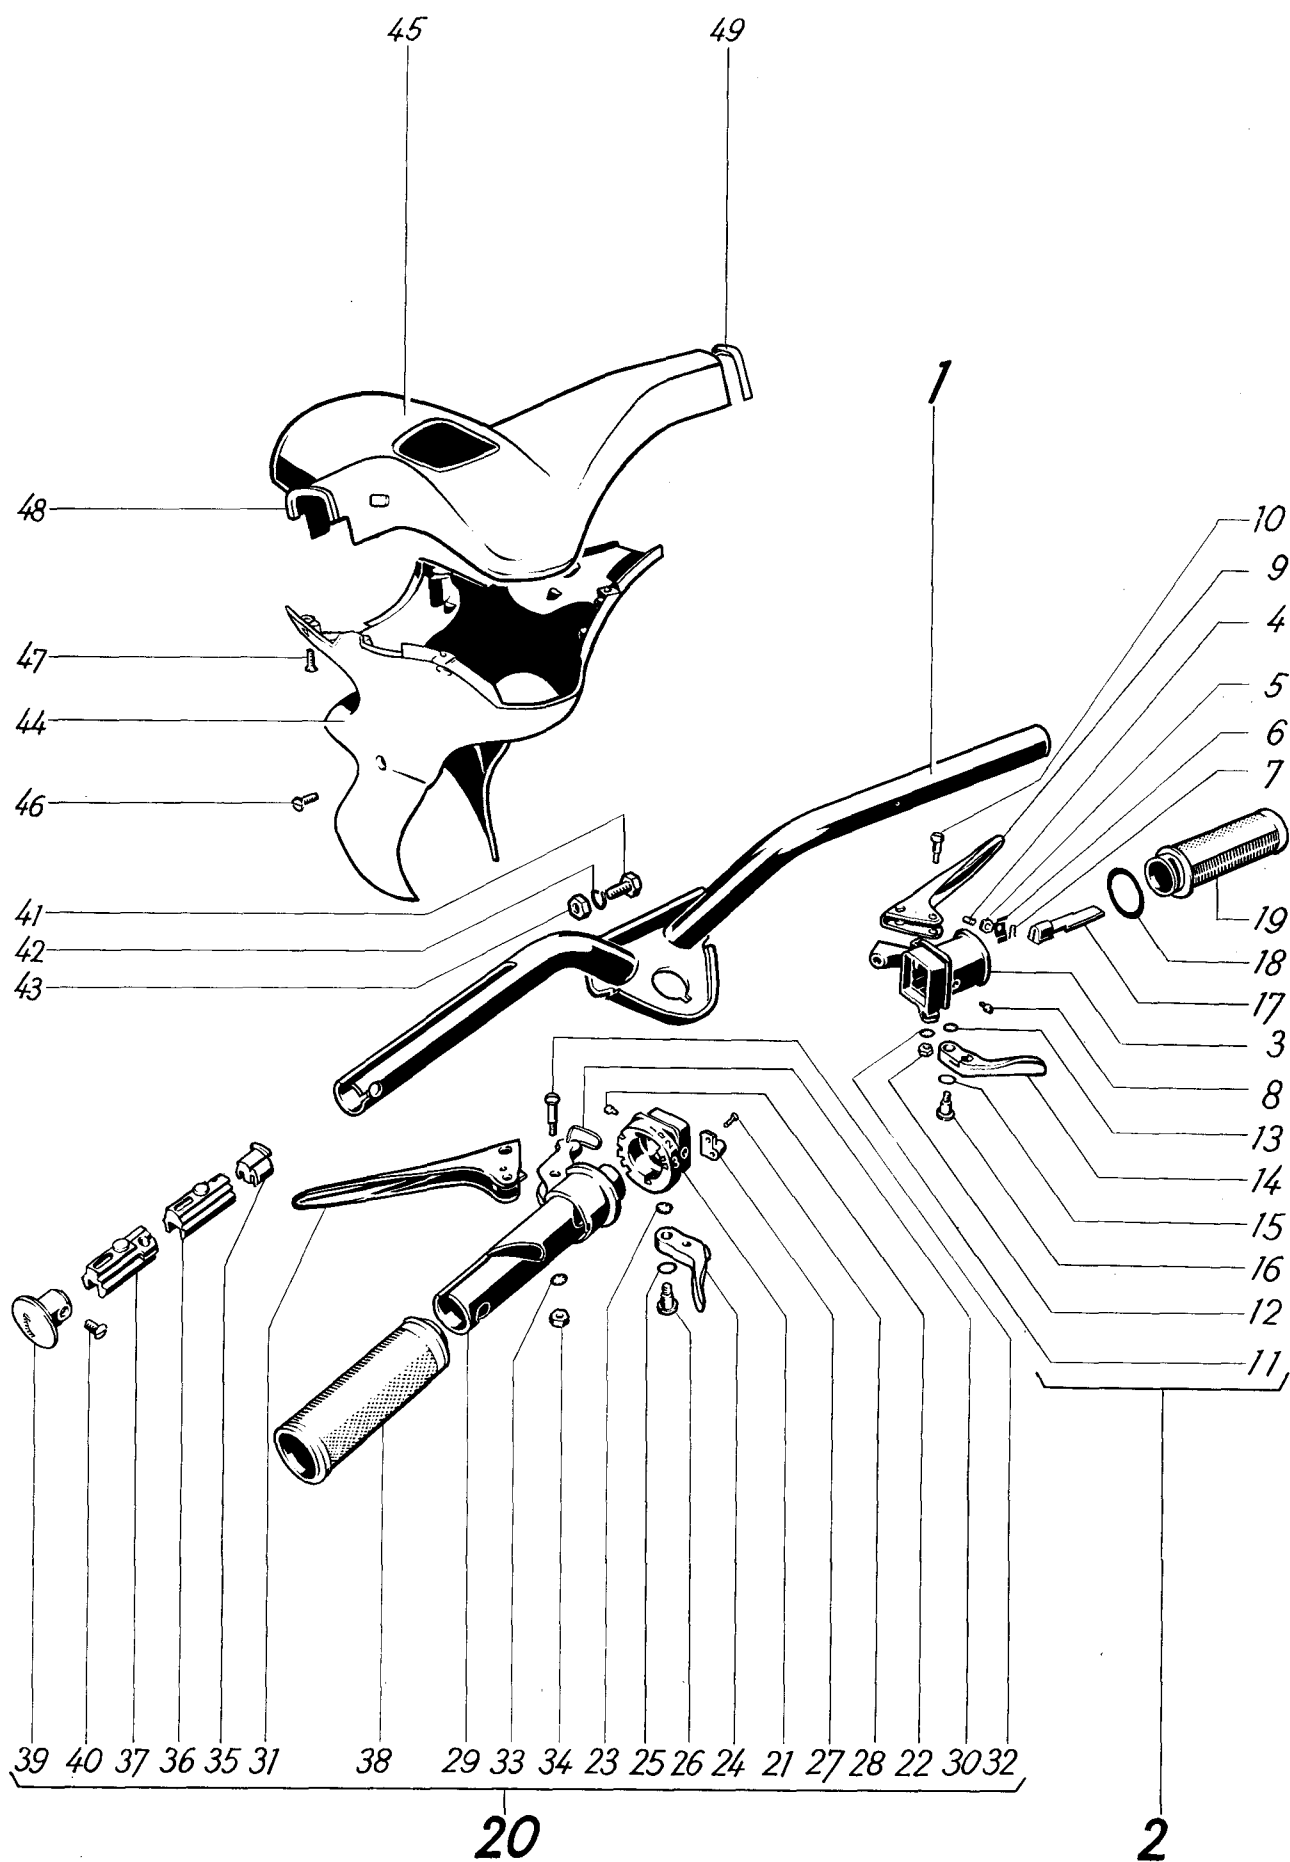


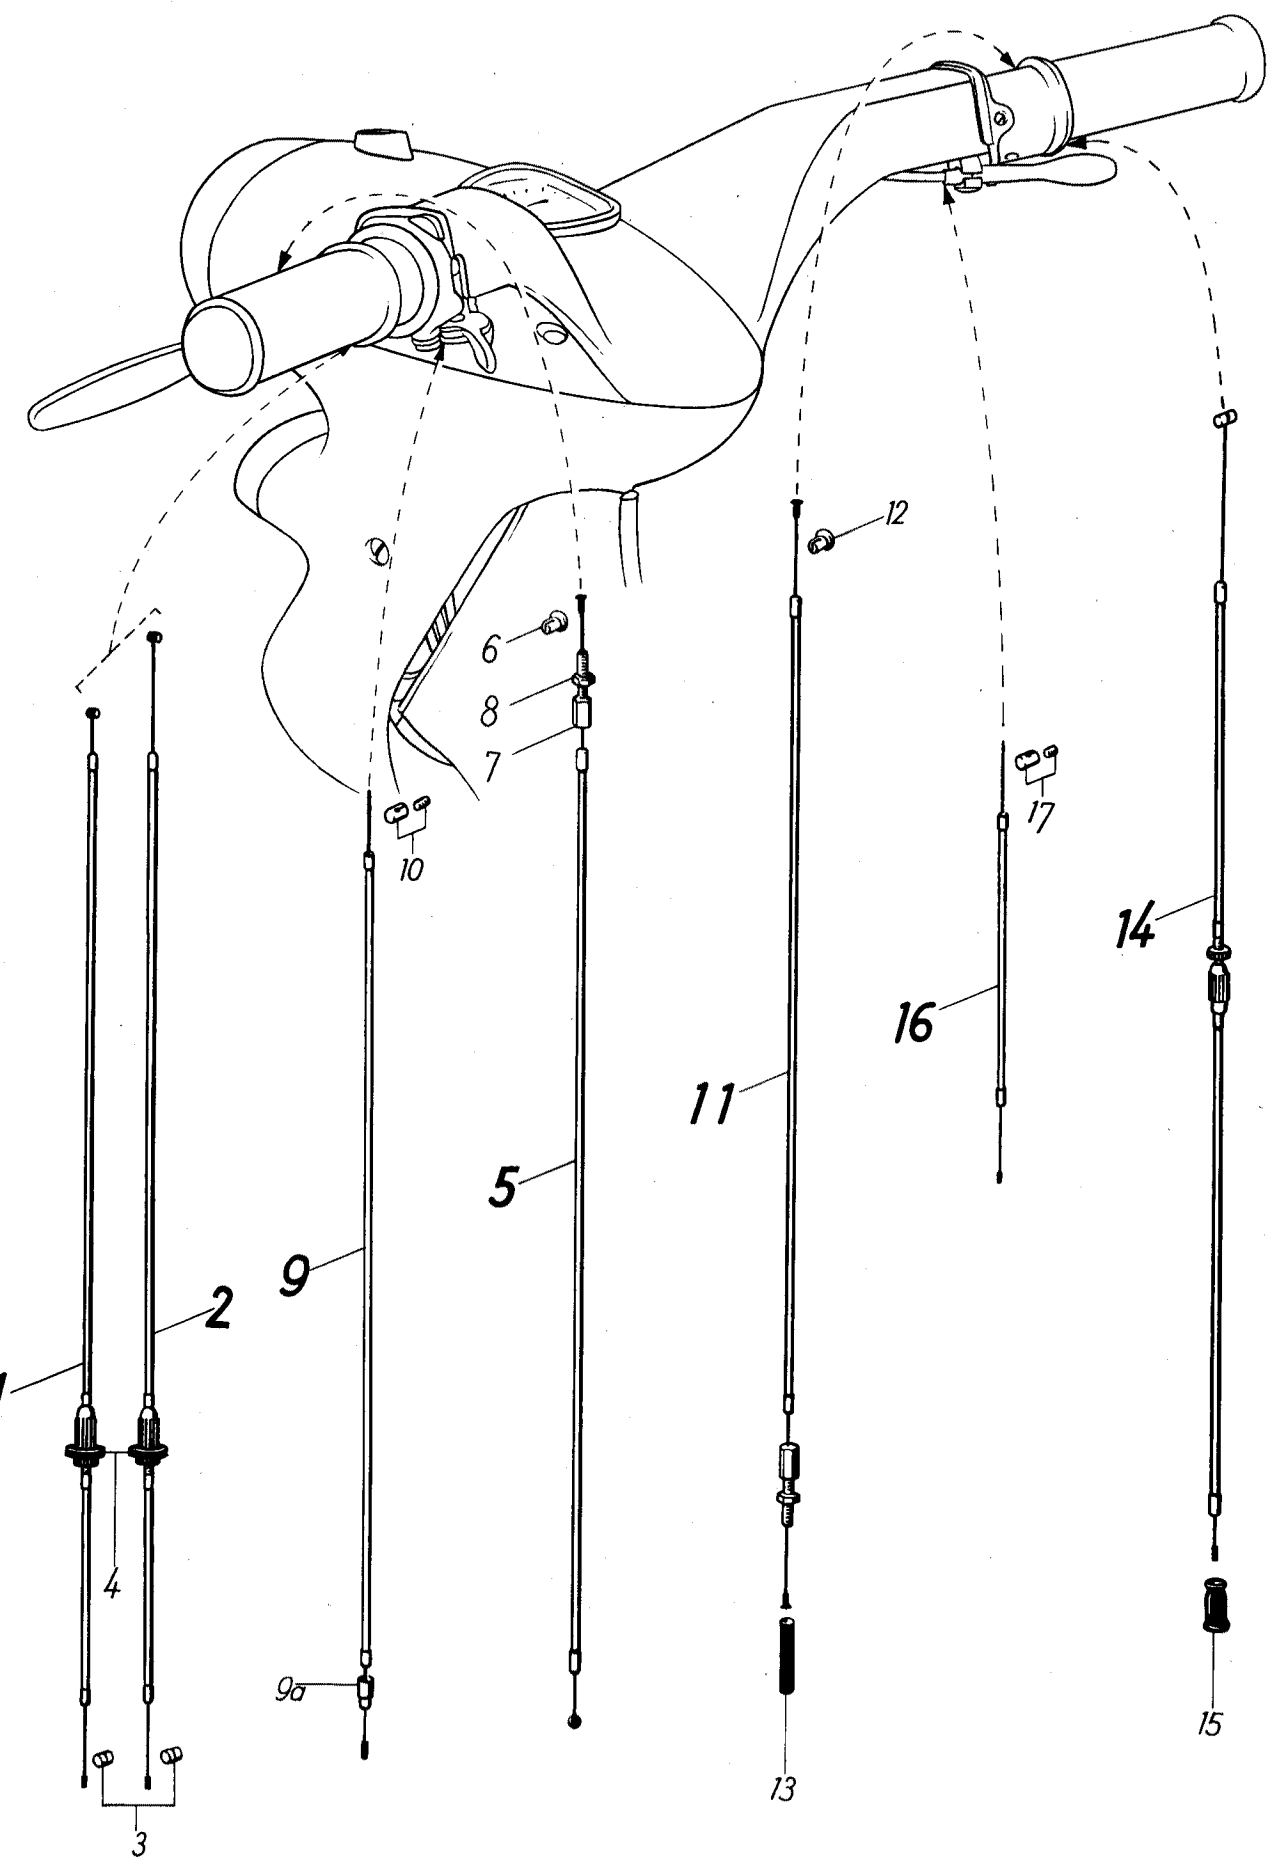

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2			
Gear change cable	29 44 00 504	1	} 3 Gears	1
Gear change cable	29 44 00 507	1		2
Nipple	16 44 00 056	2	on driver disc (gearing)	3
Rubber ring	29 44 00 002	2		4
Control cable for clutch	29 44 00 503	1		5
Nipple seat	16 44 00 023	1		6
Cable adjuster	16 44 00 046	1		7
Nut	16 44 00 049	1		8
Protecting sleeve	29 44 00 003	1	L = 270 mm	—
Protecting sleeve	29 44 00 004	1	L = 120 mm	—
Decompressor cable	16 44 01 504	1	L = 750 mm 2 909 060/2 909 121 → → 2 913 020/2 913 167	9
Decompressor cable	29 44 01 505	1	L = 729 mm 2 913 021/2 913 168 →	—
Nipple seat	16 44 00 931	1		9a
Circlip	4 DIN 6799	1		—
Protecting sleeve	29 44 00 006	1		—
Nipple	16 44 00 511	1		10
Front brake cable	29 44 00 502	1		11
Nipple seat	16 44 00 023	1		12
Protecting sleeve	29 44 00 001	1		13
Rubber cable	29 44 00 005	1		—
Throttle cable	29 44 00 501	1		14
Rubber sleeve	16 44 00 025	1		15

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2			
Front wheel	—	—	{ with Pränafa-hub brake plate of sheet ivon is not supplied, order NSU-type s. page 91	—
Rim	29 52 00 015	1		—
Spoke	29 51 00 600	36	M 3x206 mm	—
Nipple	025 104 183	36	M 3	—
Hub	29 51 00 900	1		1
Spacer	29 51 00 902	1		2
Dust cover	29 51 00 904	2		3
Ball bearing	021 105 512	2	12x32x10 mm	4
Thrust rod	29 51 00 905	1		5
Nilos-Ring	29 51 00 906	1		6
Felt washer	29 51 00 907	1		7
Dust cover	29 51 00 908	1		8
Front brake	29 51 00 909	1		9
Brake plate	29 51 00 910	1	sheet ivon type	10
Nilos-Ring	29 51 00 906	1		11
Brake operating cam	29 51 00 911	1		12
Washer	29 51 00 912	1	Rubber	13
Brake lever	29 51 00 913	1		14
Clevis link	29 51 00 914	1	{ for repair	15
Rivet	3x10 DIN 660	1		16
Lock washer	J 8,4 DIN 6798	1		17
Nut	M 8x1 DIN 936	1		18
Brake shoe	29 51 00 915	2		19
Spring	29 51 00 916	2		20
Spindle	29 51 00 917	1		21
Nut	025 103 744	2		22
Well filler	23—2,00	—	{ not supplied	—
Inner tube	23—2,25	—		—
Tyre	23—2,25	—		—

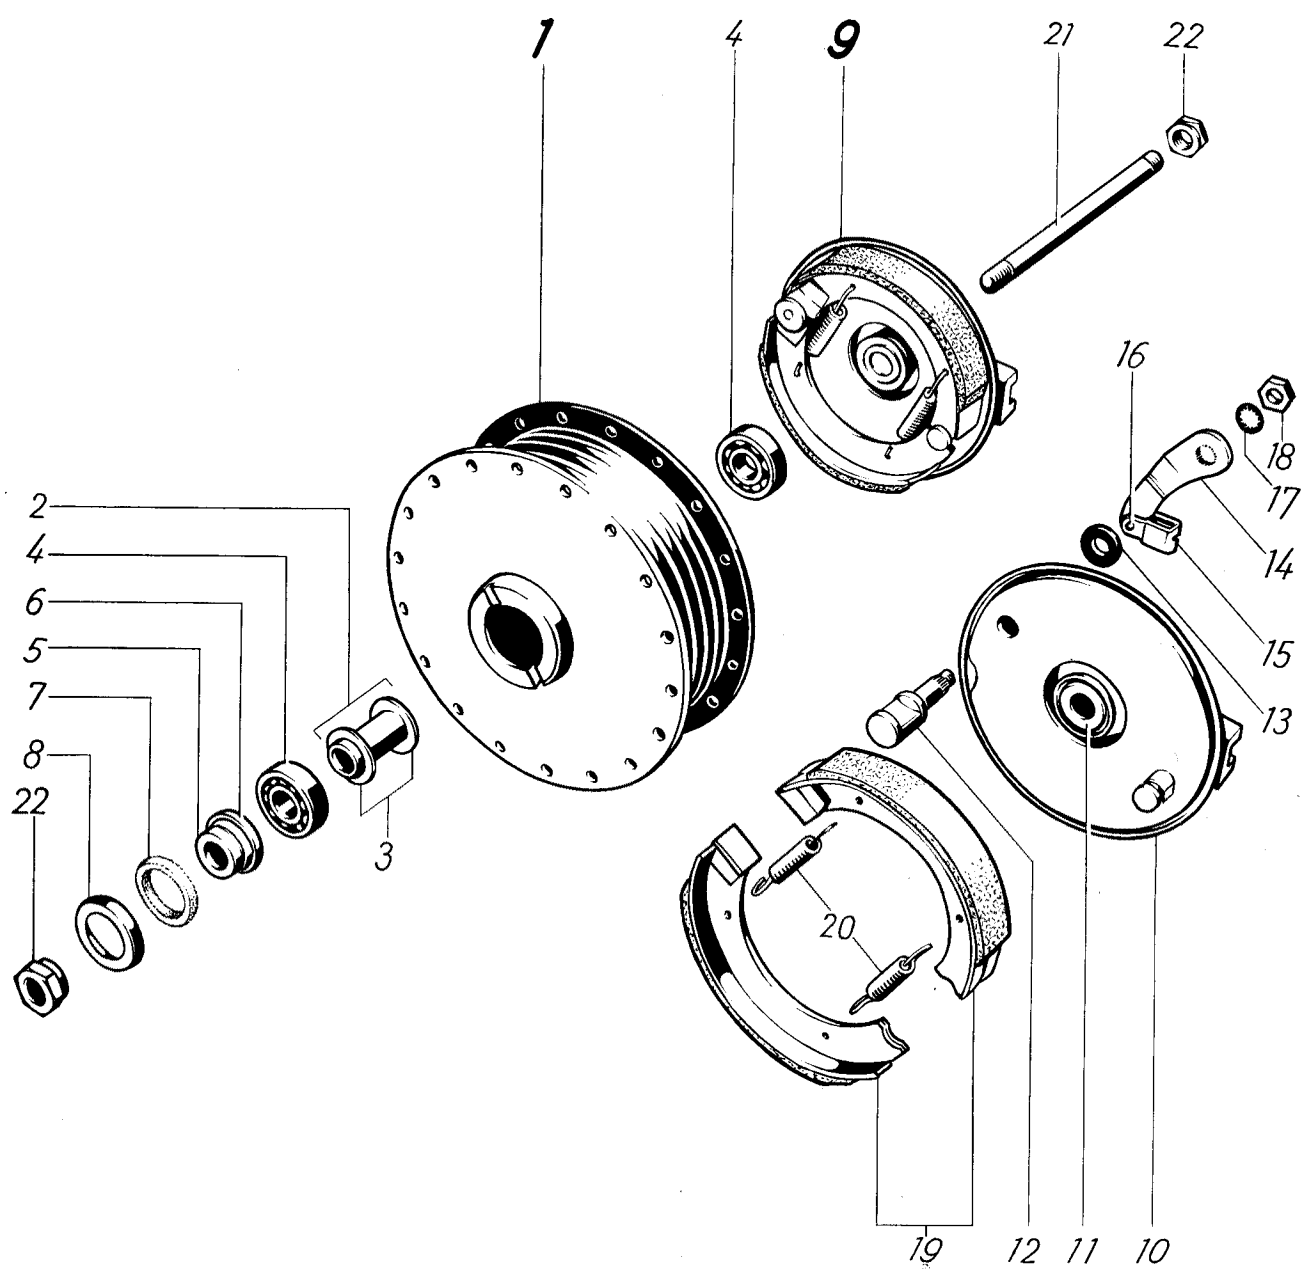


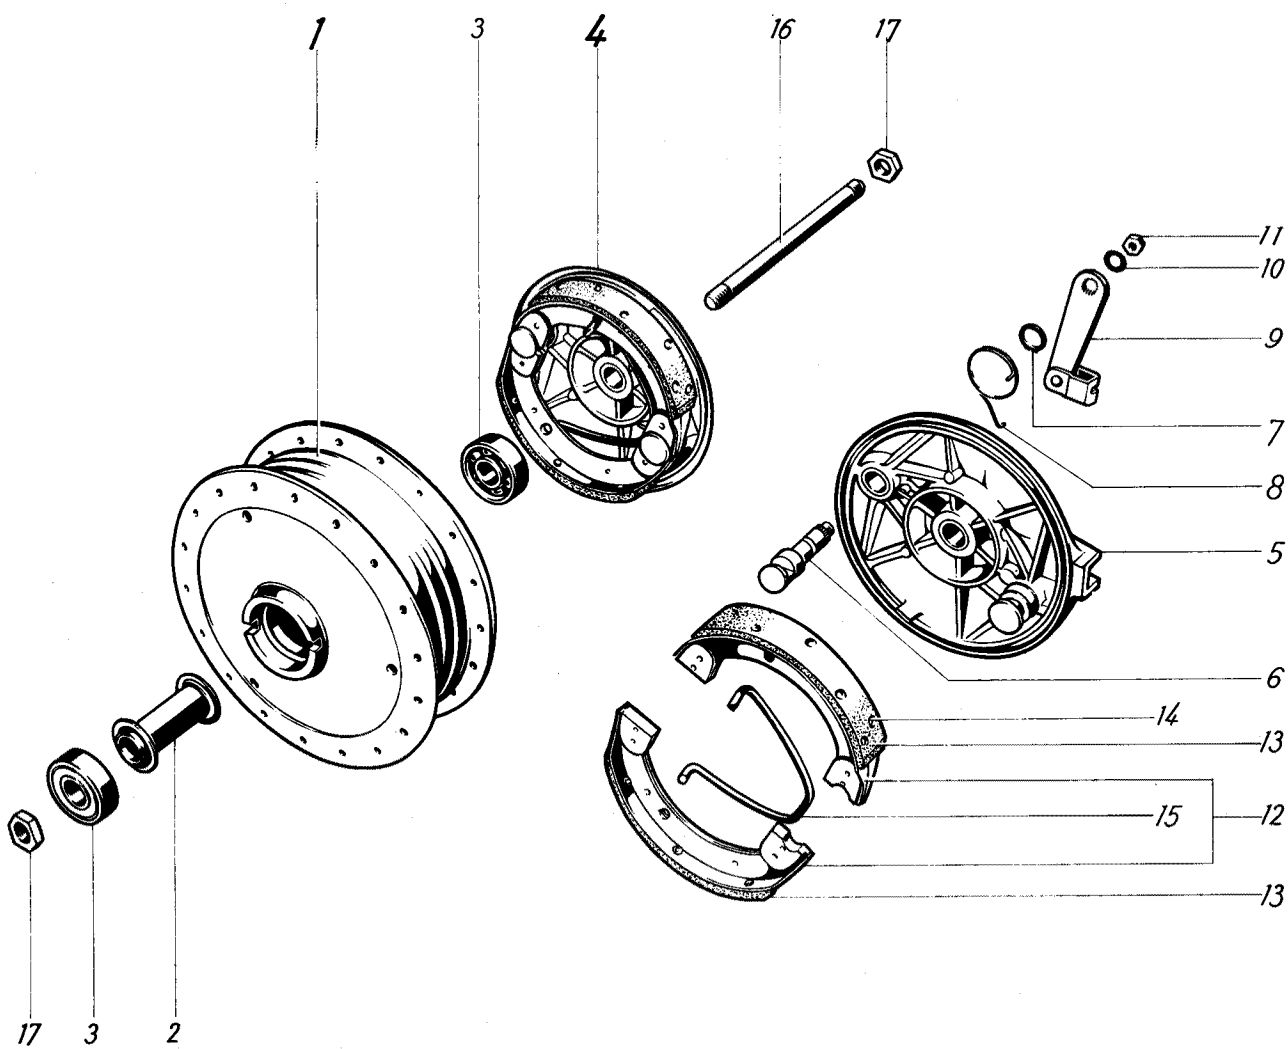


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
1 2				
Front wheel	29 51 00 919	1	{ NSU-production brake disk in cast iron	—
Rim	29 52 00 015	1		—
Spoke	29 52 00 024	36		—
Nipple	025 104 183	36	M 3	—
Front wheel hub	29 51 00 920	1		—
Hub	29 51 00 507	1		1
Spacer	29 51 00 513	1		2
Ball bearing	29 51 00 025	2	12x37x12 mm	3
Front brake	29 51 00 509	1		4
Brake plate	29 51 00 508	1	Cast iron	5
Brake operating cam	29 51 00 012	1		6
Seal ring	075 751 030	1		7
Spring	29 51 00 019	1		8
Brake lever	29 51 00 510	1		9
Spring washer	B 7 DIN 137	1		10
Nut	16 52 01 043	1		11
Brake shoe	29 51 00 501	2		12
Lining	29 51 00 020	2		13
Rivet	B 3x7 DIN 7338	14		14
Spring	29 51 00 014	1		15
Spindle	29 51 00 006	1		16
Nut	025 103 290	2		17
Well filler	23—2,00	—	{ not supplied	—
Inner tube	23—2,25	—		—
Tyre	23—2,25	—		—


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2			
Rear wheel	—	—	{ with Pränafa-hub brake plate of sheet ivon is not supplied, order NSU-type s. page 93	—
Rim	29 52 00 015	1		—
Spoke	29 51 00 600	36		—
Nipple	025 104 183	36	M 3	—
① Hub	29 52 00 900	1		1
Bolt	M 8x30 DIN 931	6	12 mm Thread	2
Sprocket	29 52 00 903	1	36 No of teeth	3
Shim	29 52 00 904	6	14x8,5x0,5 mm	4
Lock washer	J 8,4 DIN 6798	6		5
Nut	M 8 DIN 934	6		6
Spacer	29 52 00 901	1		7
Dust cover	29 51 00 904	2		8
Ball bearing	021 105 512	2	12x32x10 mm	9
Thrust rod	29 52 00 902	1		10
Nilos-Ring	29 51 00 906	1		11
Felt washer	29 51 00 907	1		12
Dust cover	29 51 00 908	1		13
Rear brake	29 52 00 905	1		14
Brake plate	29 52 00 906	1	sheet ivon type	15
Nilos-Ring	29 51 00 906	1		16
Brake cam	29 51 00 911	1		17
Washer	29 51 00 912	1	Rubber	18
Brake lever	29 52 00 907	1		19
Lock washer	J 8,4 DIN 6798	1		20
Nut	M 8x1 DIN 936	1		21
Brake shoe	29 51 00 915	2		22
Spring	29 51 00 916	2		23
Spindle	29 52 00 908	1		24
Nut	025 103 744	2		25
Chain adjusting screw	29 52 00 013	2		26
Spring washer	B 6 DIN 137	2		27
Nut	M 6 DIN 934	2		28
Well filler	23—2,00	—	{ for one - seater	—
Inner tube	23—2,25	—		—
Tyre	23—2,25	—		—
Inner tube	23—2,5	—	{ for dual seat	—
Tyre	23—2,5	—		—

① when replacing the complete NSU-hub
order also the spokes 29 52 00 024
(see page 93)

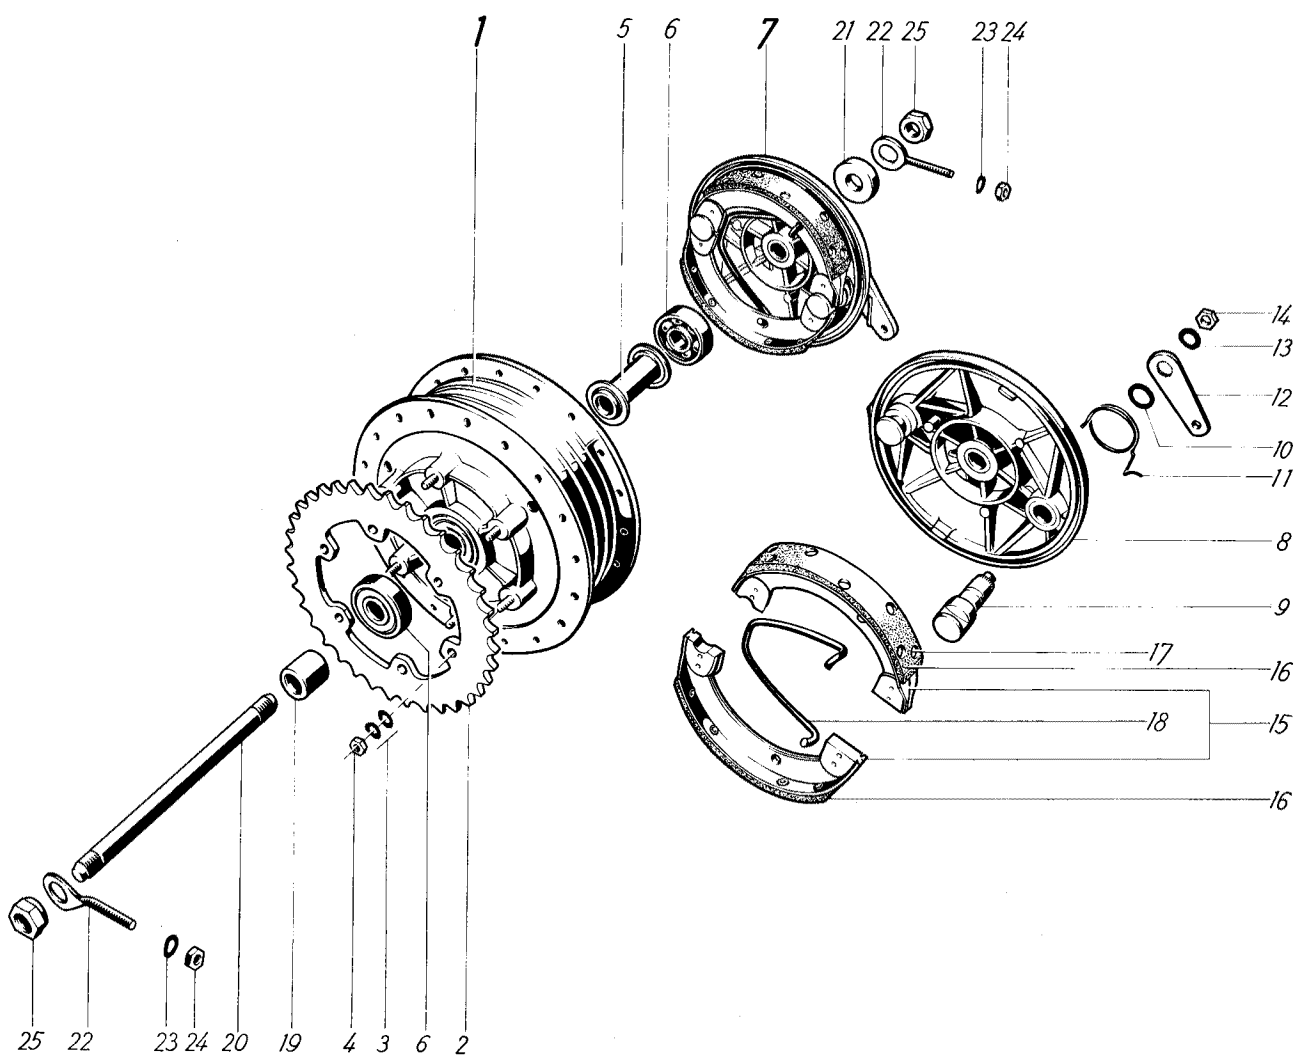

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2			
Rear wheel, without brake	29 52 01 909	1	{ NSU type (cast brake plate)	—
Rim	29 52 00 015	1		—
Spoke	29 52 00 024	36		—
Nipple	025 104 183	36	M 3	—
Rear wheel hub	29 52 01 910	1		—
Hub	29 52 01 512	1	{ when ordering a hub for vehicles prior to 2 920 641 / 2 920 549 the toothed rim with bores of 5,2 mm must be opened to 6,2 mm $\varnothing$ Eventual ordering of a new toothed rim 29 52 01 002	1
Sprocket	29 52 00 002	1	{ 36 No. of teeth → 2 920 640 / 2 920 548	2
Spring washer	B 5 DIN 137	12		3
Nut	M 5 DIN 934	6		4
Sprocket	29 52 01 002	1	{ 36 No of teeth 2 920 641 / 2 920 549 →	—
Spring-washer	B 6 DIN 137	12		—
Nut	M 6 DIN 934	6		—
Spacer	29 51 00 513	1		5
Bearing	29 51 00 025	2	12x37x12 mm	6
Rear brake	29 52 00 509	1		7
Brake plate	29 51 00 508	1	Cast type	8
Brake operating cam	29 51 00 012	1		9
Seal ring	075 751 030	1		10
Spring	29 52 00 007	1		11
Brake lever	29 52 00 023	1		12
Spring washer	B 7 DIN 137	1		13
Nut	16 52 01 043	1		14
Brake shoe	29 51 00 501	2		15
Lining	29 51 00 020	2		16
Rivet	B 3x7 DIN 7338	14		17
Spring	29 51 00 014	1		18
Spacer, left	29 52 00 016	1		19
Spindle	29 52 00 001	1		20
Spacer, right	29 52 00 017	1		21
Chain adjusting screw	29 52 00 013	2		22
Spring washer	B 6 DIN 137	2		23
Nut	M 6 DIN 934	2		24
Nut	025 103 744	2		25
Well filler	23—2,00	—	{ for one - seater } not supplied	—
Inner tube	23—2,25	—		—
Tyre	23—2,25	—		—
Inner tube	23—2,5	—		—
Tyre	23—2,5	—	{ for dual seat }	—

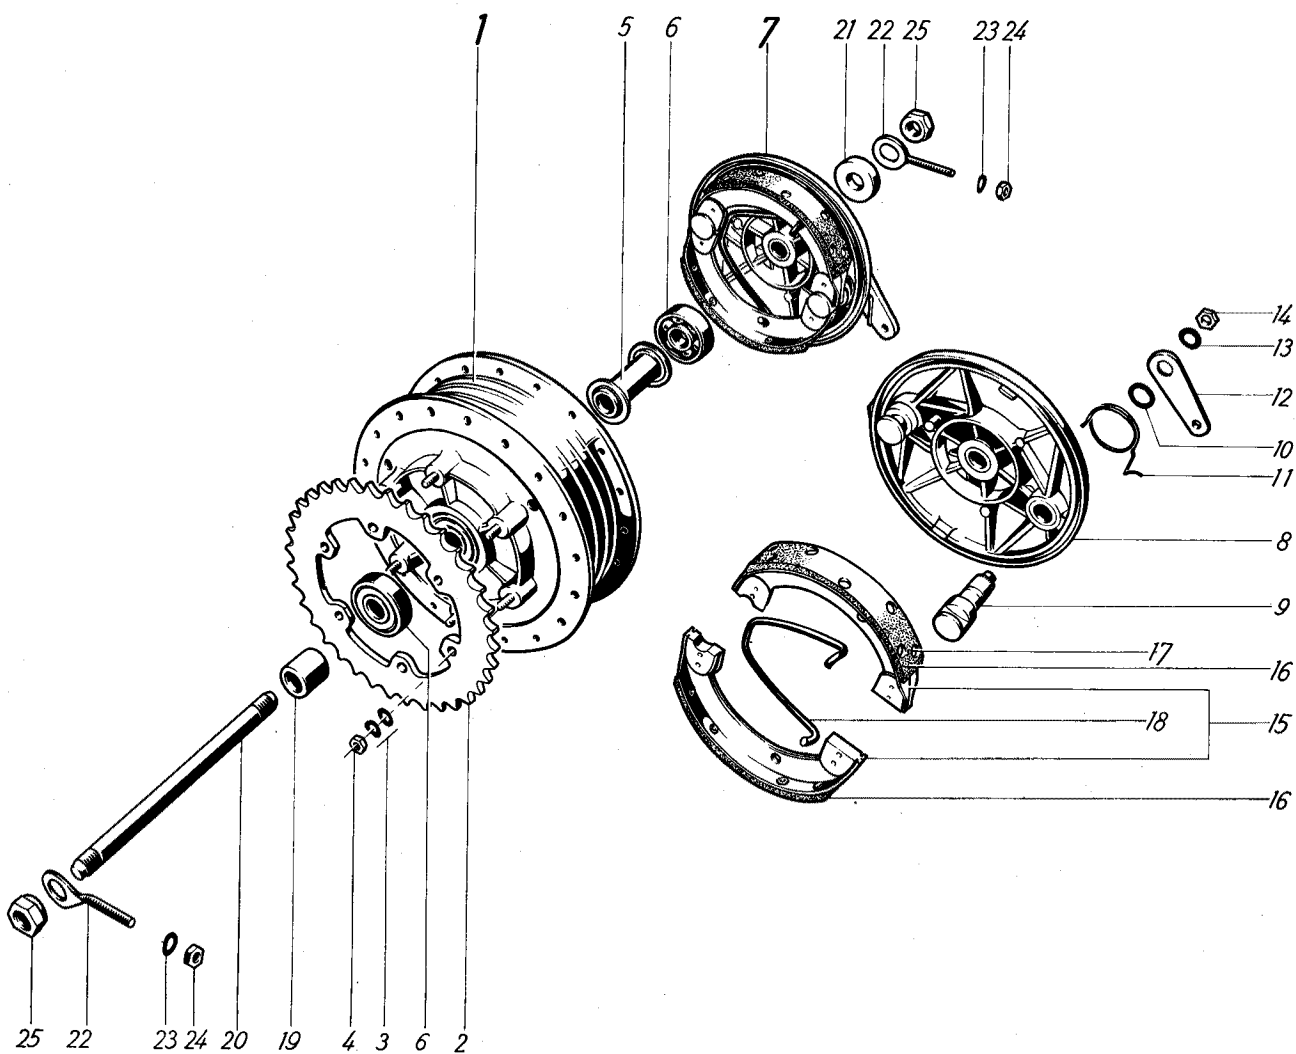


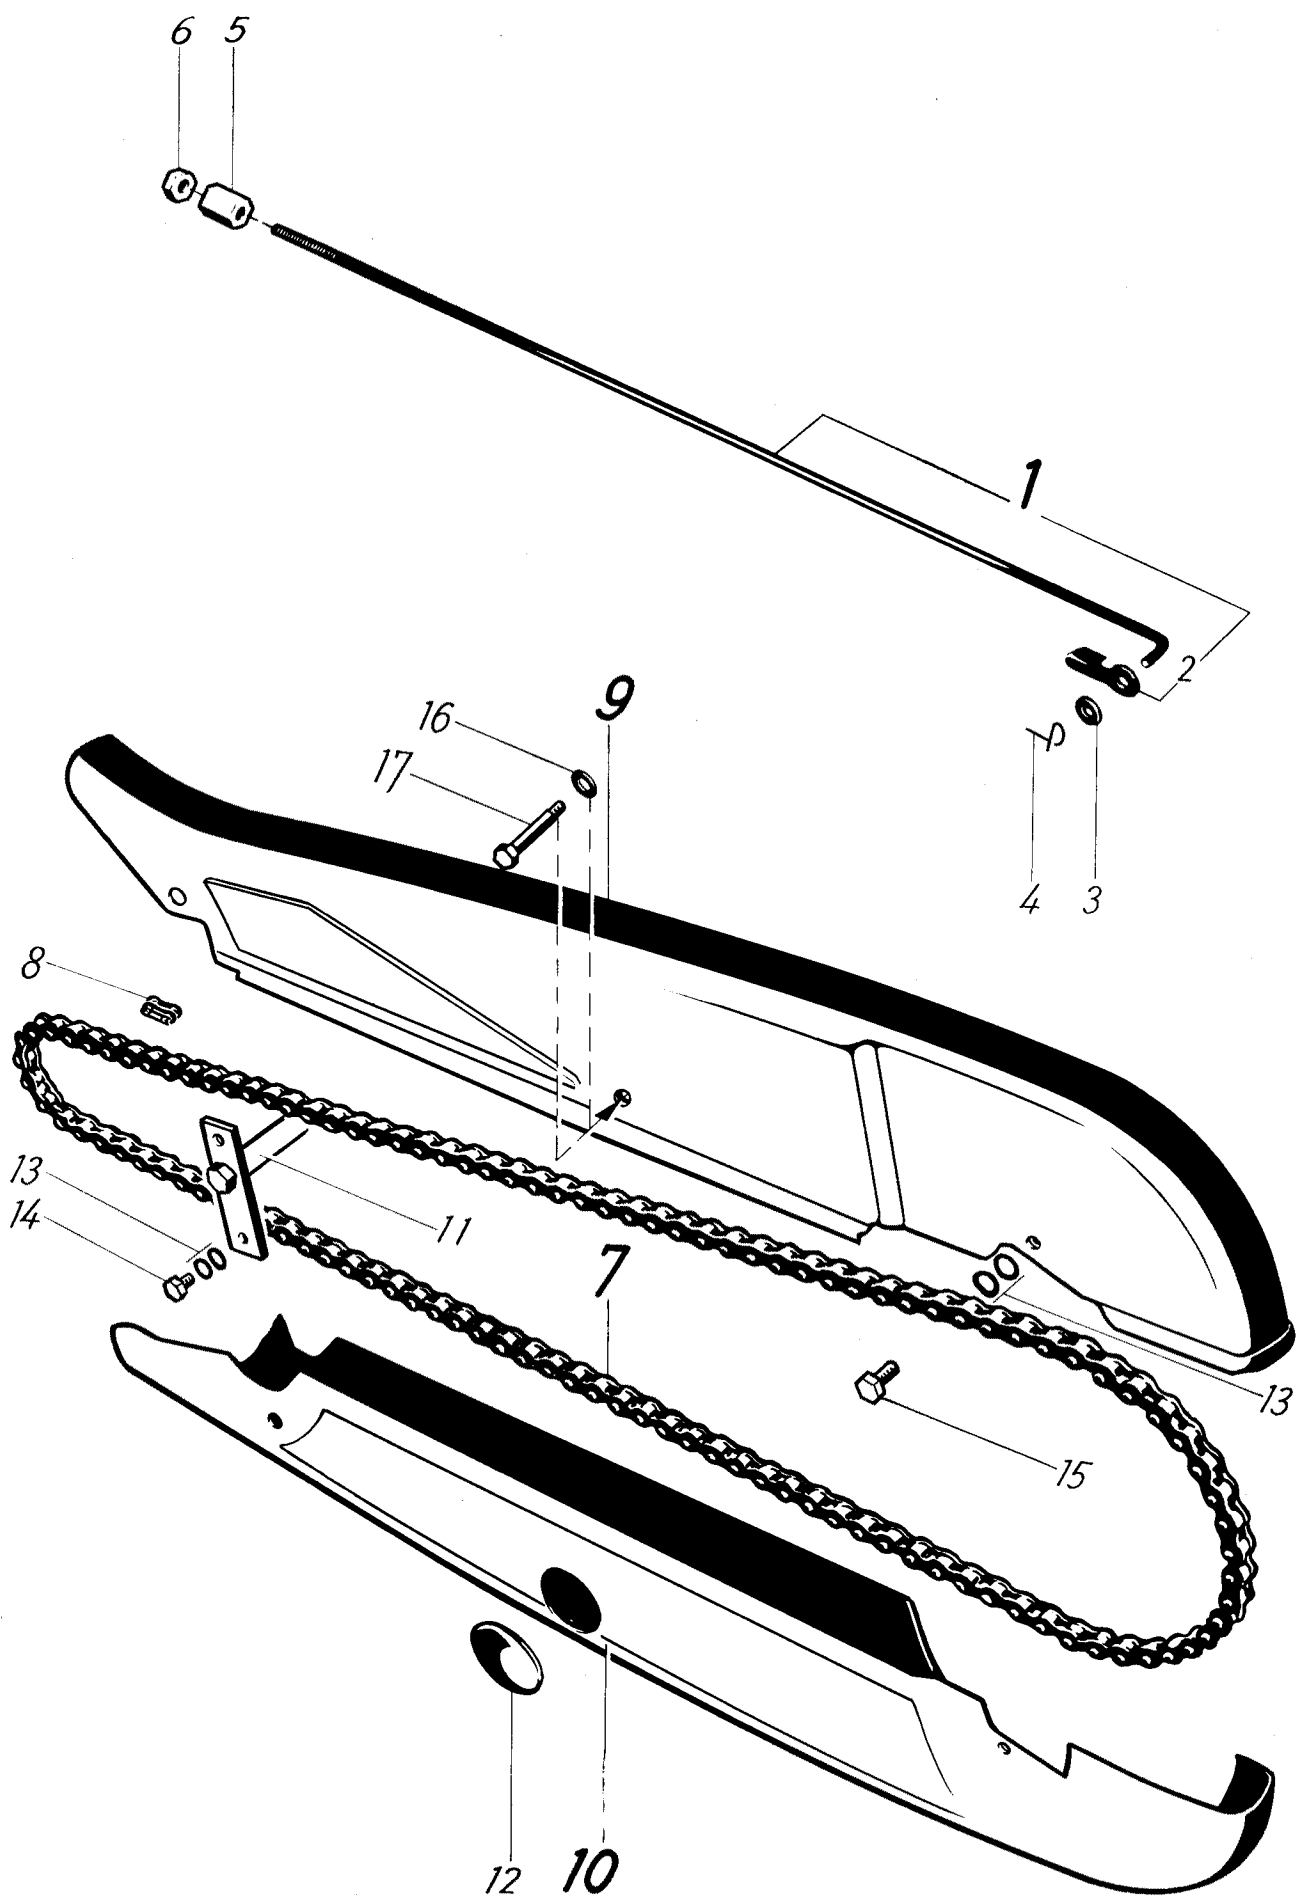



Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2			
Brake rod	16 53 01 502	1	L = 557 mm 5,2x12x1 mm for type with Pränafo-hub	1
Lock plate	025 100 655	1		2
Washer	125 059 963	1		3
Locking spring	11 53 00 819	1		4
Nut	16 53 01 003	1		5
Nut	M 5 DIN 934	1		6
Brake rod	29 53 00 900	1	for type with NSU-hub	—
Brake rod	29 53 00 501	1	L = 490 mm	—
Lock plate	025 100 655	1	5,2x12x1 mm s. page 51 Illustr. No. 13-19	—
Washer	125 059 963	1		—
Locking spring	11 53 00 819	1		—
Clevis link	16 53 00 006	1		—
Nut	M 5 DIN 934	2		—
Pin	16 53 00 005	1		—
Circlip	5 DIN 6799	1		—
Chain	16 54 00 600	1	112 Link 1 E 12,7x4,88 DIN 8180	7
Connecting link	16 54 00 601	1	1 E 12,7x4,88 DIN 8180	8
Chaincase, upper section	29 54 00 501	1	for vehicles prior to 2 904 983 / 2 905 091 order also 1 spring washer B 7 DIN 137 and 1 Collar screw 29 54 00 010	9
Chaincase, lower section	29 54 00 502	1		10
Chaincase mounting	29 54 00 503	1		11
Cover plate	075 754 021	1		12
Spring washer	B 6 DIN 137	8		13
Bolt	M 6x6 DIN 933	2		14
Bolt	M 6x12 DIN 933	2		15
Washer	7,4 DIN 125	1		16
Bolt	29 54 00 010	1		17

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2 3 4			
① Rear spring unit	29 56 00 501	2	for one-seater } → 2 915 037 / 2 913 951	—
① Rear spring unit	29 56 00 510	2	for dual seat } is not supplied	—
Rear spring unit	29 56 01 510	2	2 915 038 / 2 913 952 →	1
Shock absorber	29 56 00 502	2		2
Cover cap	29 57 00 030	2		3
Rubber ring (hight 30 mm)	29 56 00 021	2	→ 2 915 037 / 2 913 951 order also	—
Cover sleeve	29 56 00 014	2		4
Circlip	29 56 00 016	2		5
Ring	29 56 00 015	2		6
Stop	29 57 00 016	2	hight 15 mm → 2 915 037 / 2 913 951	7
Stop	29 56 00 020	2	hight 5 mm 2 915 038 / 2 913 952 →	—
① Rear spring (thickness of wire 5,3 mm)	29 56 00 011	2	for one-seater } → 2 915 037 / 2 913 951	8
① Rear spring (Thickness of wire 6 mm)	29 56 00 005	2	for dual seat } is not supplied	—
Rear spring (thickness of wire 5,3 mm)	29 56 01 005	2	2 915 038 / 2 913 952 →	—
Protection tube	29 56 00 506	2		9
② Front spring unit	29 57 00 501	2	→ 2 915 037 / 2 913 951 is not supplied 29 57 01 501 order	—
Front spring unit	29 57 01 501	2	2 915 038 / 2 913 952 →	10
Shock absorber	29 57 00 502	2		11
Cover cap	29 57 00 030	2		12
Cover sleeve	29 57 00 031	2		13
Circlip	29 56 00 016	2		14
Ring	29 57 00 032	2		15
Protection sleeve	29 57 00 015	2		16
Stop	29 57 00 016	2	hight 15 mm	17
② Front spring (thickness of wire 4,5 mm)	29 57 00 017	2	→ 2 915 037 / 2 913 951 is not supplied 29 57 01 017 order	18
Front spring (thickness of wire 4,5 mm)	29 57 01 017	2	2 915 038 / 2 913 952 →	—
Protection tube	29 57 00 506	2		19
Rubber ring for balancing	29 57 00 021	each 4		20
Balancing cup	29 57 00 023	each 2		21
Spacer bush	29 57 00 022	each 2		22
Balancing cap	29 57 00 024	each 2		23
Nut	29 57 00 035	each 4		24
Bolt	29 57 00 025	each 2		25
Circlip	6 DIN 6799	each 2		26

① Doing repairs on machines prior to No. 2 915 038 / 2 913 952 exchange rear wheel suspension in pairs, resp. use rear wheel springs (part No. 29 56 01005) of wire gauge 5,3 mm with one stop-ring each at top (part No. 29 56 00 020), height 5 mm.


② Doing repairs prior to machine-No. 2 915 038 / 2 913 952 exchange front wheel suspension resp. front wheel springs in pairs.

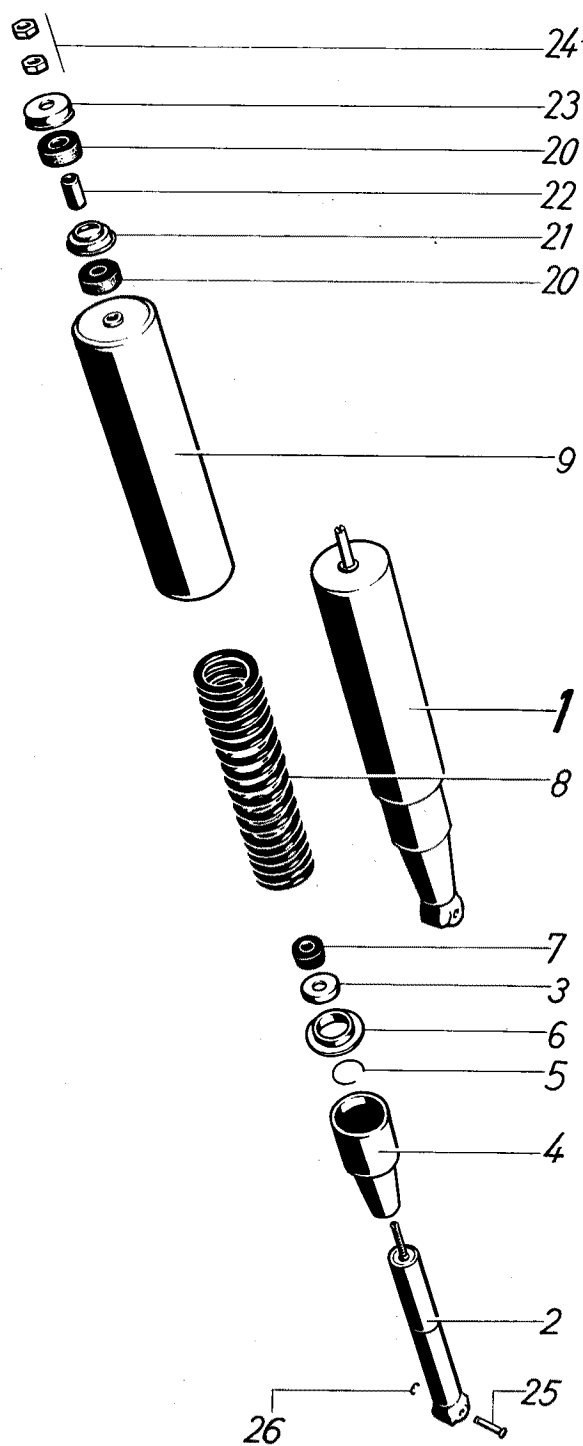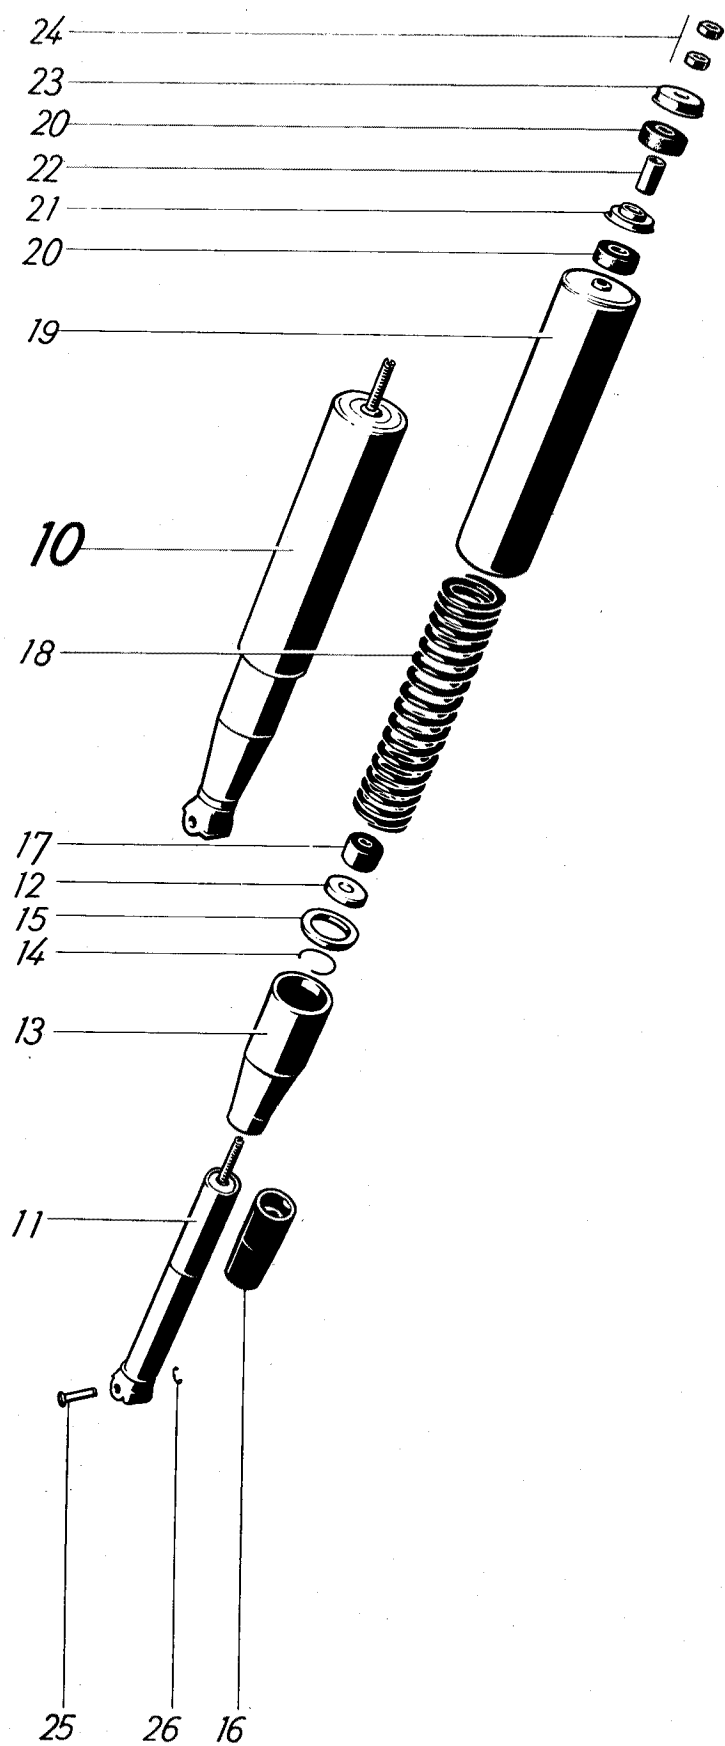


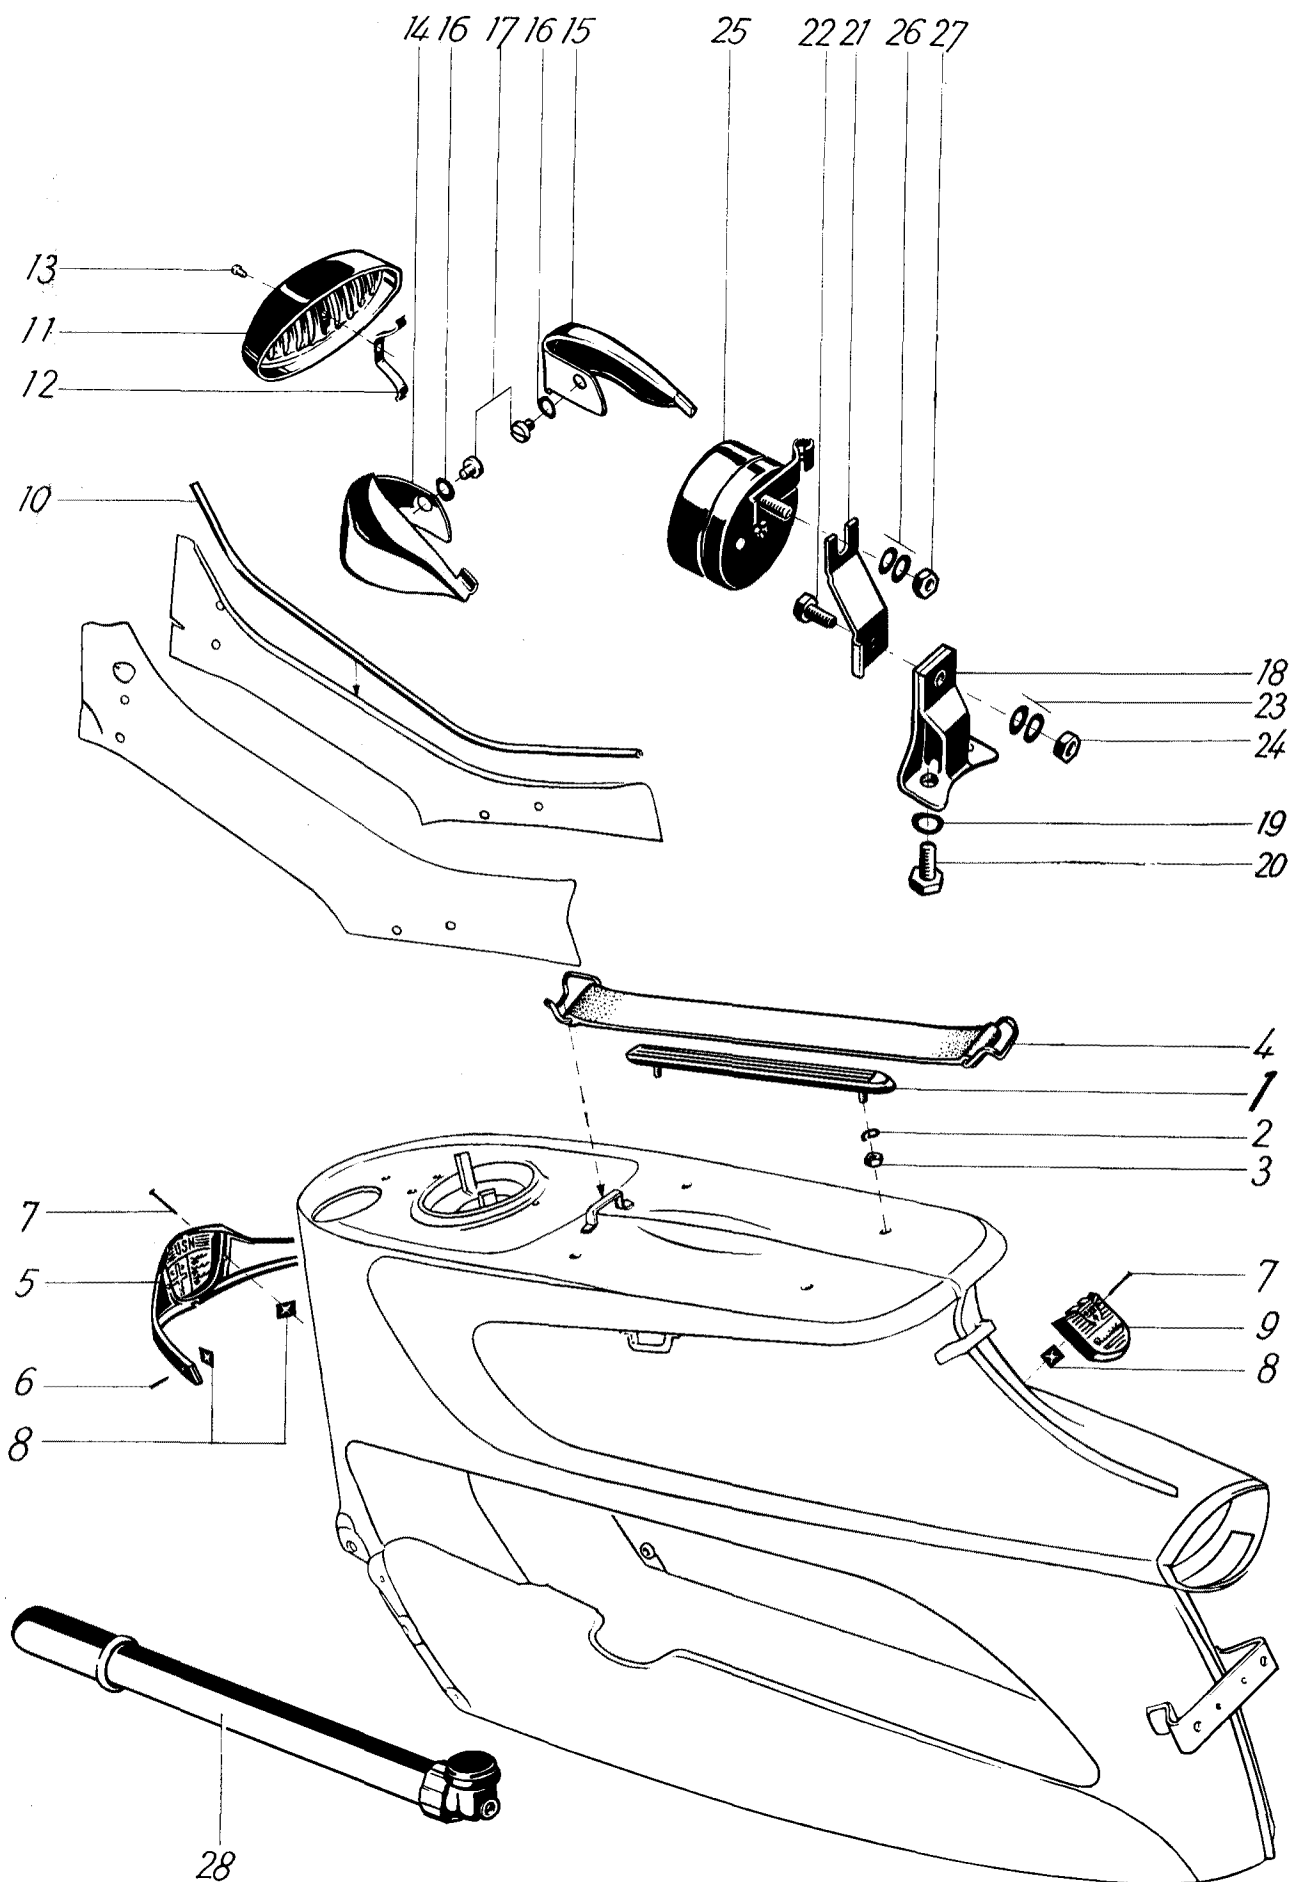

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1			
Luggage strip	29 66 00 510	2		1
Spring ring	A 6 DIN 127	2		2
Nut	M 6 DIN 934	4		3
Strap	16 93 00 520	1	Rubber	4
Grille for rear cowling	29 66 00 018	1		5
Pin	29 66 00 023	2	short	6
Pin	29 66 00 008	4	long	7
Nut	40 66 00 216	8		8
Emblem, front and rear	29 66 00 019	2	→ 2 914 829 / 2 914 597	9
Emblem, front	29 66 00 019	1	} 2 914 830 / 2 914 598 →	—
Emblem, rear	29 66 00 027	1		—
Pin	29 66 00 023	2	short	—
Rubber moulding	29 66 01 011	1		10
Cover plate	29 66 00 508	1		11
Spring	29 66 00 022	1	} only for repair	12
Rivet	3x5 DIN 660	1		13
Cover plate, left	29 66 00 001	1		14
Cover plate, right	29 66 00 002	1		15
Spring washer	A 5 DIN 137	2		16
Screw	AM 5x6 DIN 85	2		17
Angle	29 66 00 511	1		18
Spring washer	A 7 DIN 137	2		19
Bolt	M 7x15 DIN 933	2		20
Bracket	29 66 00 016	1		21
Bolt	M 6x12 DIN 933	1		22
Spring washer	B 6 DIN 137	2		23
Nut	M 6 DIN 934	1		24
Inflator	16 93 01 502	1		28
Numberplate, rear	29 66 00 026	1		—
Screw	M 5x10 DIN 85	2		—
Washer	5,3 DIN 125	2		—
Spring washer	B 5 DIN 137	4		—
Nut	M 5 DIN 934	2		—


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1			
Exhaust pipe	29 71 00 002	1		1
Gasket	16 71 00 002	2		2
Union	16 71 00 001	1		3
Silencer assy	16 71 02 502	1		4
Silencer	16 71 02 505	1		5
Baffle	16 71 01 009	1		6
Lock washer	J 4,3 DIN 6798	1		7
Screw	M 4x8 DIN 86	1		8
Silencer clip	16 71 02 008	1		9
Screw	AM 6x18 DIN 86	1		10
Spring ring	A 6 DIN 127	1		11
Nut	M 6 DIN 934	1		12
Clip	16 71 00 006	1		13
Bolt	M 5x18 DIN 933	1		14
Spring washer	A 5 DIN 137	2		15
Nut	M 5 DIN 934	1		16
Clip	29 71 00 001	1		17
Bolt	M 6x18 DIN 933	1		18
Spring ring	A 6 DIN 127	1		19
Nut	M 6 DIN 934	1		20
Fuel tank	29 72 00 502	1		21
Filler cap	16 72 01 504	1		22
Gasket	16 72 00 024	1		23
Gasket	29 72 00 010	1		24
Spring ring	B 6 DIN 137	4		25
Bolt	M 6x12 DIN 933	2		26
Fuel tap	29 72 00 506	1		27
Strainer	16 72 00 905	1		28
Gasket	16 72 00 901	2		29
Nut	16 72 00 904	1		30
Gasket	16 72 00 903	1		31
Gauze filter	29 72 00 901	1		32
Connector	29 72 00 900	1		33
Cap nut	16 72 00 902	1		34
Hose	11 72 00 006	1	L = 120 mm	35
Sleeve	023 104 269	2		36

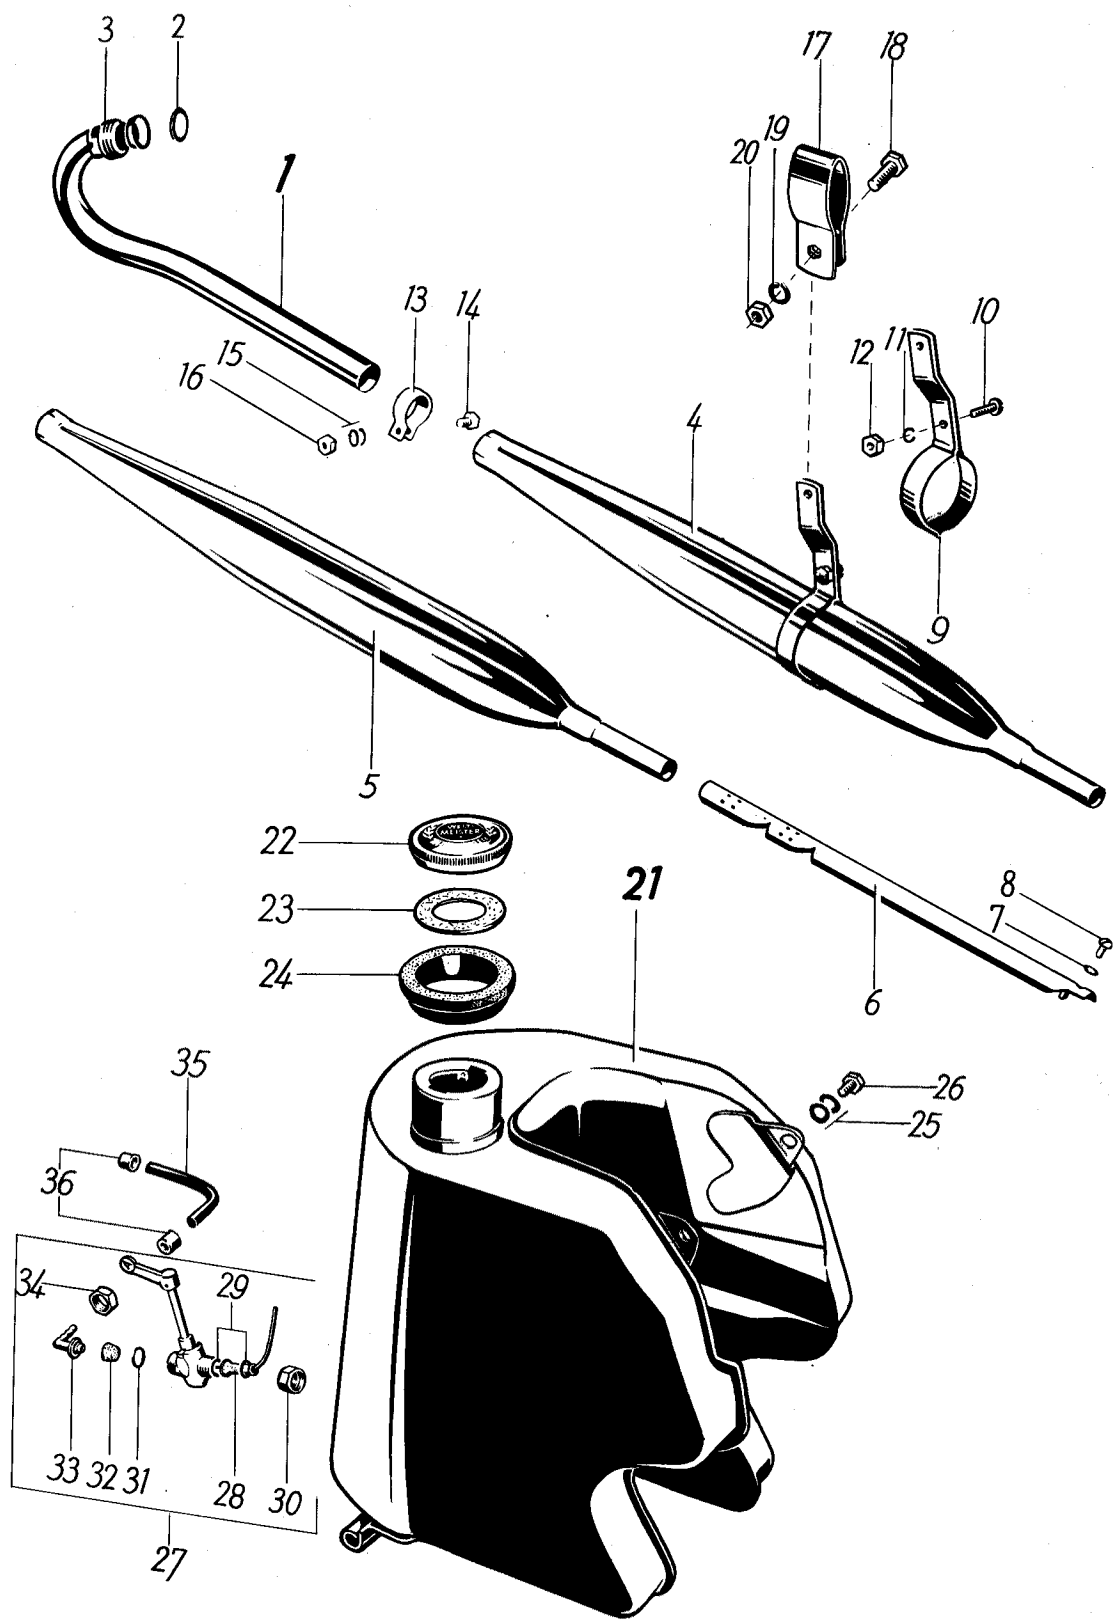


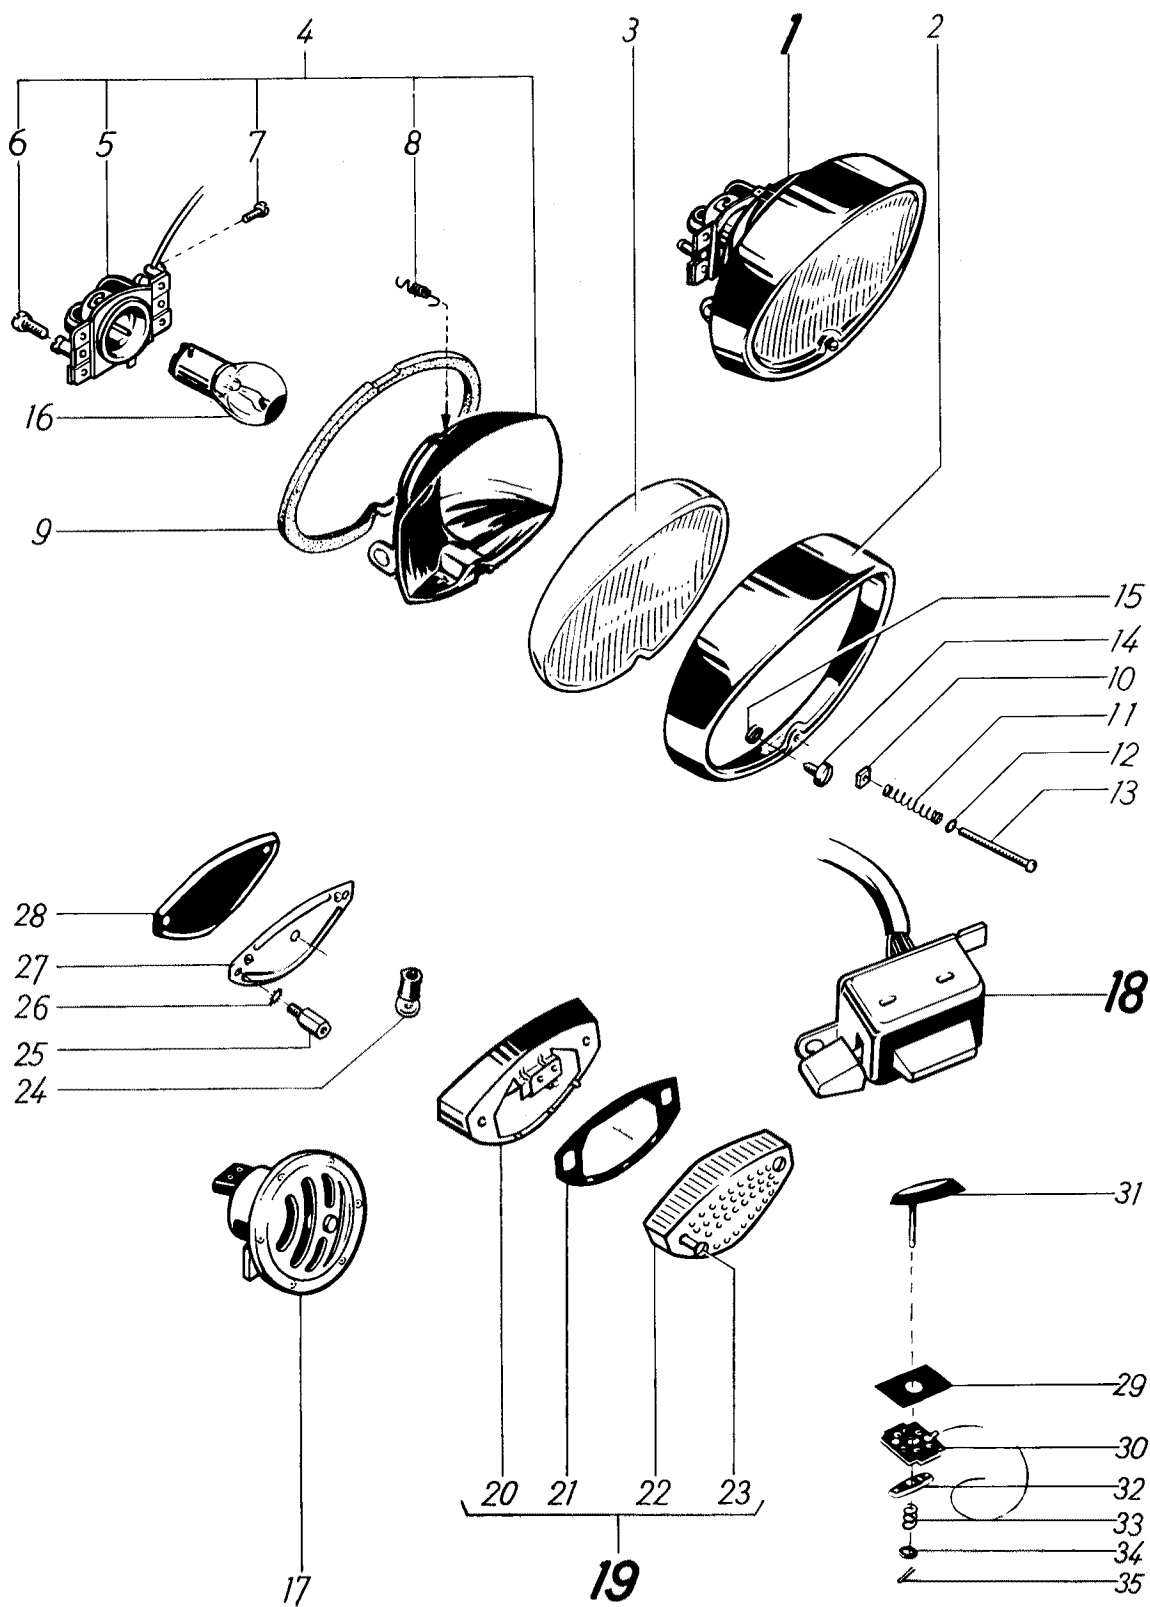

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2 3			
Cable harness	29 80 00 501	1		—
Lead , engine - headlamp	29 80 00 502	1		—
Ground cable (headlight)	29 80 00 503	1		—
Headlamp	29 81 00 508	1		1
Rim	29 81 00 902	1		2
Lens	29 81 00 914	1		3
Reflector w/spring	29 81 00 920	1		4
Socket	29 81 00 921	1		5
Screw	29 81 00 919	4		6
Cylinder screw	29 81 00 901	1		7
Ground cable	29 81 00 917	1		—
Spring	29 81 00 918	1		8
Gasket	29 81 00 905	1		9
Nut	29 81 00 908	1		10
Spring	29 81 00 909	1		11
Washer	29 81 00 910	1		12
Screw	29 81 00 911	1		13
Screw	29 81 00 912	1		14
Circlip	29 81 00 913	1		15
Bulb	16 81 00 514	1	6 V 15 W Bilux	16
Rattle	29 81 00 504	1		17
Lead for rattle	16 81 00 003	1	L = 250 mm	—
Dipswitch	29 81 00 505	1		18
Spring washer	A 6 DIN 137	1		—
Screw	073 771 032	1		—
Tail lamp	29 81 01 510	1		19
Casing with no plate cover	29 81 00 925	1		20
Screw	29 81 00 901	1		—
Gasket	29 81 00 923	1	Rubber	21
Outlet of light	29 81 00 924	1		22
Screw	29 81 00 907	2		23
Bulb	126 110 414	1	H 6 V 3 W	24
Screw	29 81 00 008	2		25
Lock washer	A 4,3 DIN 6798	2		26
Base plate	29 81 00 005	1		27
Rubber plate	29 81 01 002	1	Rubber	28
Switch	16 43 00 510	1		—
Insulating plate	16 81 00 933	1		29
Contact plate	16 81 01 924	1		30
Switch lever	16 81 02 905	1		31
Contact bridge	16 81 01 906	1		32
Spring	16 81 01 907	1		33
Washer	16 81 01 908	1		34
Split pin	1x12 DIN 94	1		35


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-T				
	1 2			
Tool	29 91 00 900	1		—
Screw driver	16 91 00 003	1		1
Spanner	11 91 00 600	1	8x9 mm	2
Spanner	11 91 00 601	1	10x11 mm	3
Spanner	29 91 00 002	1	12x19 mm	4
Box spanner	028 104 992	1		5
Pin	29 91 00 001	1		6
Toll roll	29 91 00 501	1		7
Speedometer head (M. P. H.)	29 92 00 504	1		8
Spring	29 92 00 001	1		8a
Flexible drive	16 92 02 502	1	L = 850 mm	9
Cable clip	29 44 00 005	1		—
Speedometer drive	29 92 00 503	1		10
Felt washer	16 92 00 905	1		11
Leg-guard	29 93 00 903	1		12
Leg-guard	29 93 00 901	1		—
Counter sund screw	B 4,2x19 DIN 7973	4		13
Bolt	29 93 00 019	2		14
Spring washer	B 6 DIN 137	2		15
Nut	M 6 DIN 934	2		16
Rubber plug	11 16 00 024	4		17
Additional sheathing	29 93 00 003	1		18
Intermediate plate	29 93 00 020	2		—
Screw	AM 4x8 DIN 91	4		19
Spacing washer	11 39 00 066	4		20
Spring washer	A 4 DIN 137	8		21
Cap nut	M 4 DIN 917	4		22
Beading	29 93 00 015	1		23
Beading for additional sheathing	29 93 00 016	1		—
Clip	40 93 00 028	6		24
Set of biseing part	29 93 00 902	1		—
Case of deposit	29 93 00 904	1		25
Lid	29 93 00 503	1		26
Pin	2,5 h 11x55 DIN 7	1		27
Insignia	16 72 01 035	1		28
Knob	29 93 00 012	1		29
Spring	29 93 00 011	1		30
Washer	40 56 00 017	1		31
Washer	125 059 963	1		32
Spring ring	A 5 DIN 127	1		33
Screw	AM 5x12 DIN 85	1		34
Strip, rubber	083 874 033	2	(Rubber)	35
Screw	AM 6x12 DIN 91	4		36
Spacing washer	11 39 00 009	4		37
Spring washer	B 6 DIN 137	8		38
Nut	M 6 DIN 934	4		39
Luggage carrier	29 93 00 900	1	→ 2 914 829 / 2 914 597	—
Luggage carrier	29 93 01 900	1	2 914 830 / 2 914 598 → } optional	—

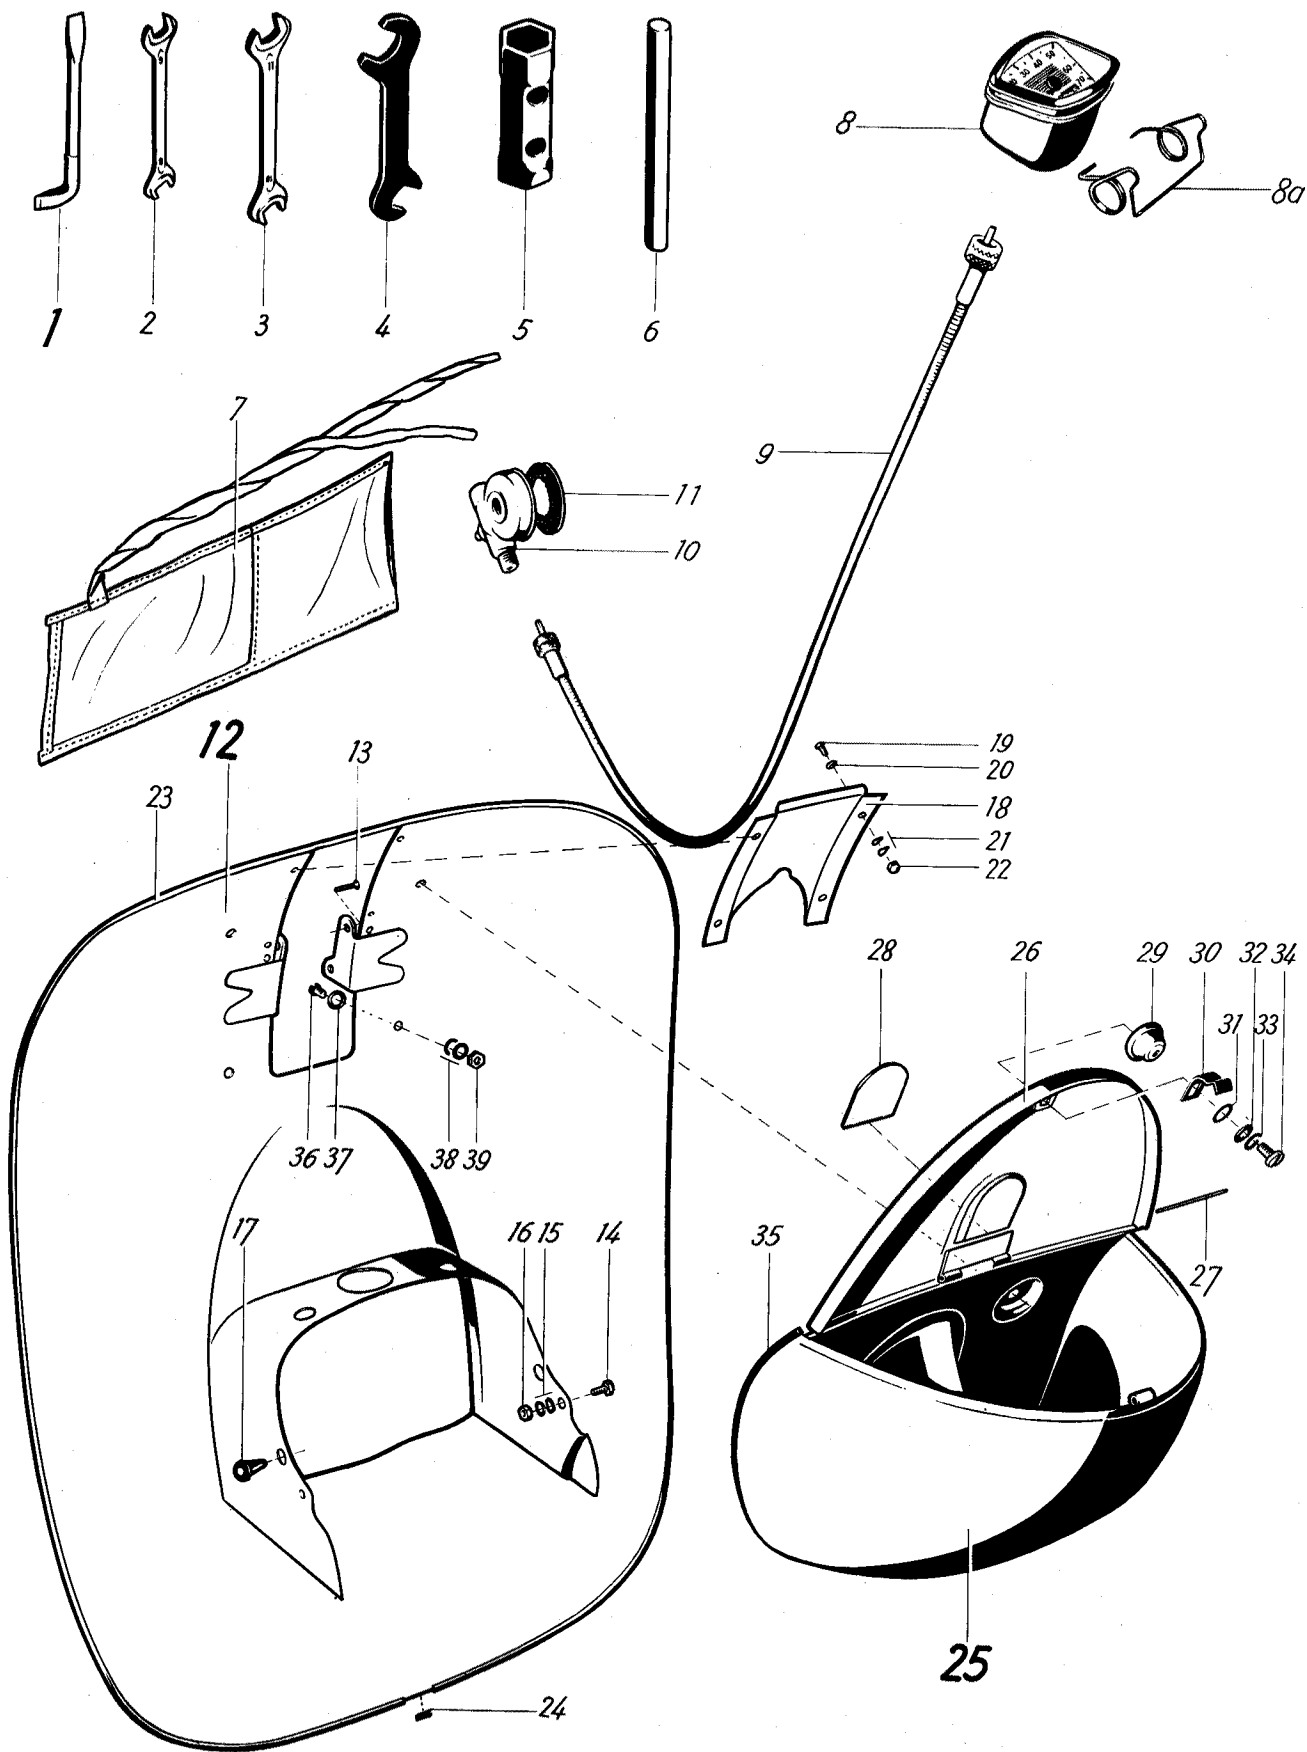


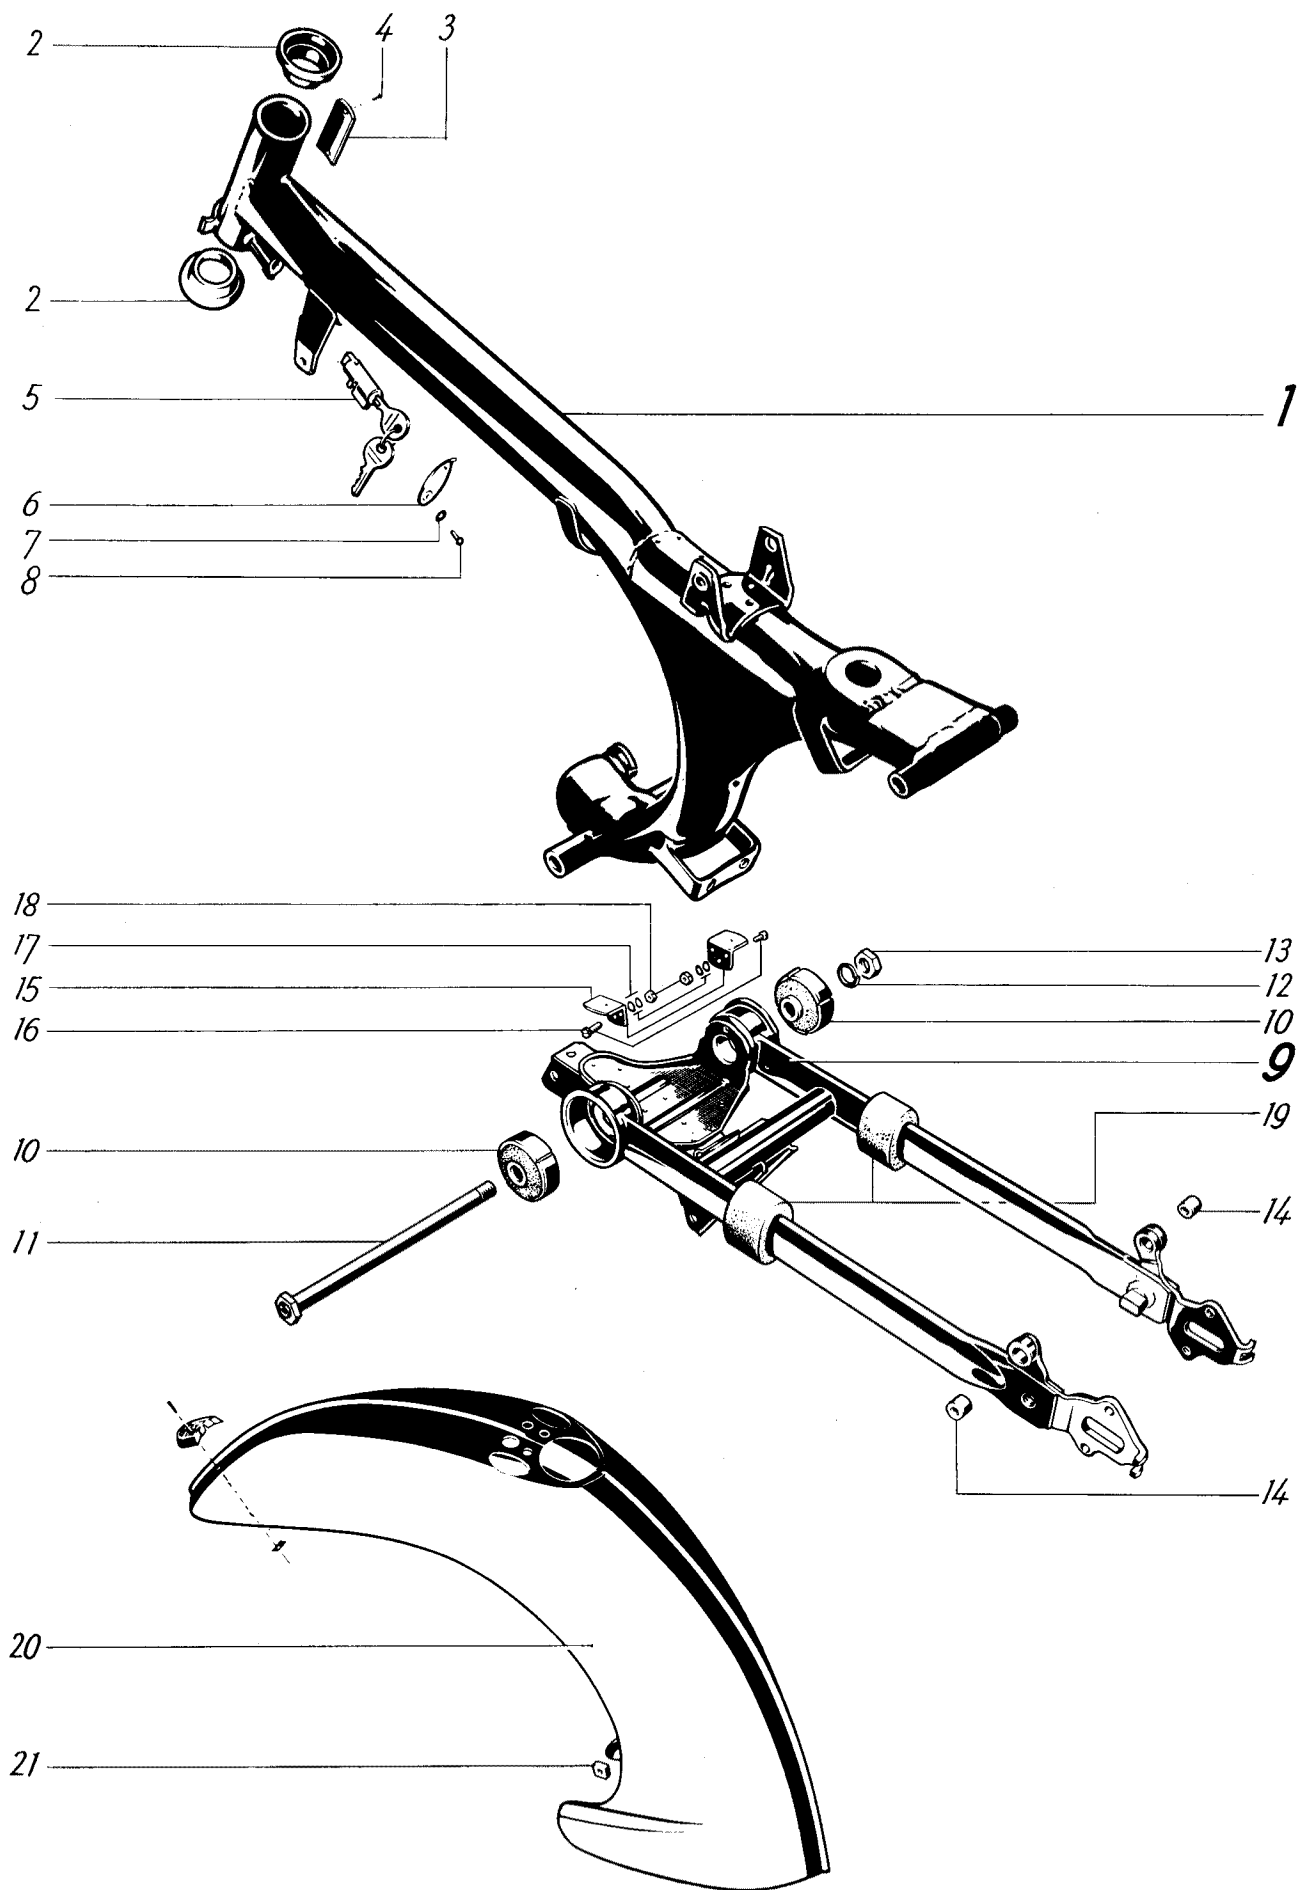

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
Frame	39 31 00 900	1		1
Stering head race	023 103 927	2		2
Nameplate	16 31 00 900	1	not supplied without stamped number	3
Grooved stud	2x3 DIN 1476	2		4
Steering-head lock	39 31 00 505	1	order spare key from producers	5
Cover plate	39 31 00 016	1		6
Spring washer	A 3 DIN 137	1		7
Grooved stud	3x8 DIN 1476	1		8
Rear fork	29 32 00 501	1		9
Ring	29 32 00 027	2		10
Axle pin	29 32 00 508	1		11
Spring ring	A 14 DIN 127	1		12
Nut	M 14x1,5 DIN 936	1		13
Bush	29 41 00 013	2		14
Bracket for engine cowl.	39 39 00 010	2		15
Screw	AM 5x10 DIN 84	2		16
Spring washer	B 5 DIN 137	4		17
Nut	M 5 DIN 934	2		18
Rubber damper	11 16 00 030	2		19
Front mudguard	29 33 00 501	1		20
Nut	M 8 DIN 557	2	for swinging link mounting	21

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
	1 2			
Centre stand	29 35 01 501	1		1
Bolt	29 35 01 005	2		2
Spring washer	B 12 DIN 137	2		3
Spring washer	B 10 DIN 137	2		4
Nut	M 10x1 DIN 936	2		5
Spring	29 35 00 504	1		6
Spring	29 35 00 009	2		7
Clevis link	29 35 00 010	1		8
Rivet	5x12 DIN 660	1		9
Spring washer	B 6 DIN 137	2		10
Screw	M 6x12 DIN 933	1		11
Footrests	39 37 00 501	2		12
Spring washer	B 12 DIN 137	1	} for footrests, left	13
Screw	M 12x1,5x15 DIN 961	1		14
Screw	—	—	} for footrests, right s. page 111, Illustr.-No. 19, 20, 21	—
Spring washer	—	—		—
Washer	—	—		—
Seat cushion	39 38 01 502	1	} for dual seat for one — seater	15
Seat cushion	39 38 02 502	1		—
Bracket plate	39 38 00 900	1	} on vehicles prior to 3 905 786 / 3 905 923 bore 2 holes of $\varnothing$ 6,4 mm on auxiliary frame with 2 hex screws 29 93 00 019 and 4 Spring washers B 6 DIN 137	—
Spring washer	B 6 DIN 137	8		16
Screw	M 6x12 DIN 933	4		17
Grip handle	39 38 00 503	1		18
Washer	16 31 00 091	2		19
Spring washer	B 6 DIN 137	4		20
Nut	M 6 DIN 934	2		21
Auxiliary frame	39 38 00 501	1		22
O Ring	39 38 00 005	1		23
Rubber support	39 38 00 007	1	} $\rightarrow$ 3 905 785 / 3 905 922	24
Screw	29 38 00 012	1		25
Spring washer	B 6 DIN 137	2	} 3 905 786 / 3 905 923 $\rightarrow$	26
Nut	M 6 DIN 934	1		27
Spring washer	B 6 DIN 137	4		—
Screw	29 93 00 019	2		—
Screw	M 8x20 DIN 933	2		28
Spring washer	B 8 DIN 137	4		29
Screw	M 10x1x115 DIN 960	1		30
Spring washer	A 10 DIN 137	2		31
Nut	M 10x1 DIN 936	1		32
Screw	M 6x75 DIN 931	1		33
Spring washer	B 6 DIN 137	2		34
Nut	M 6 DIN 934	1		35

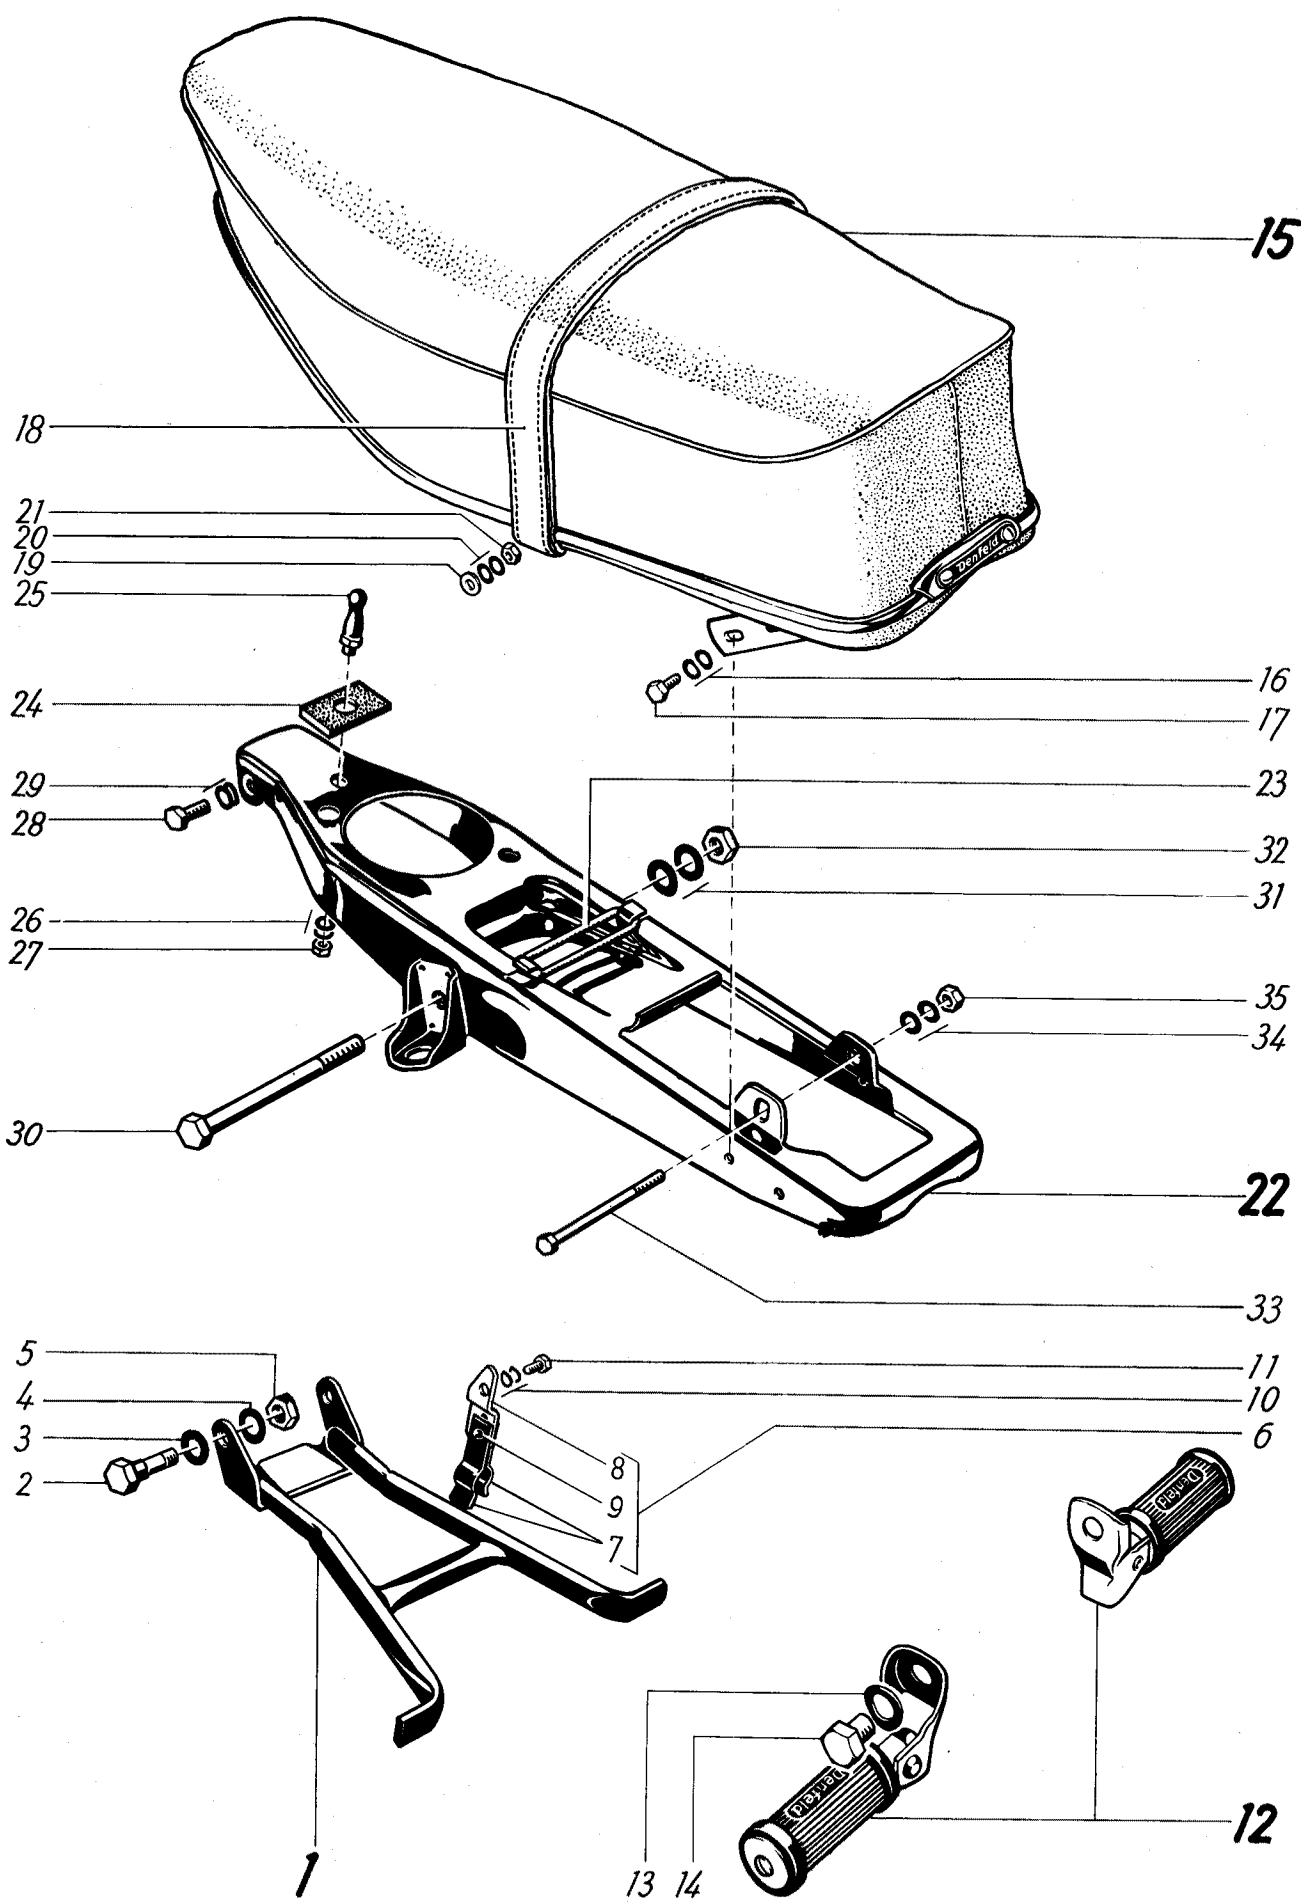

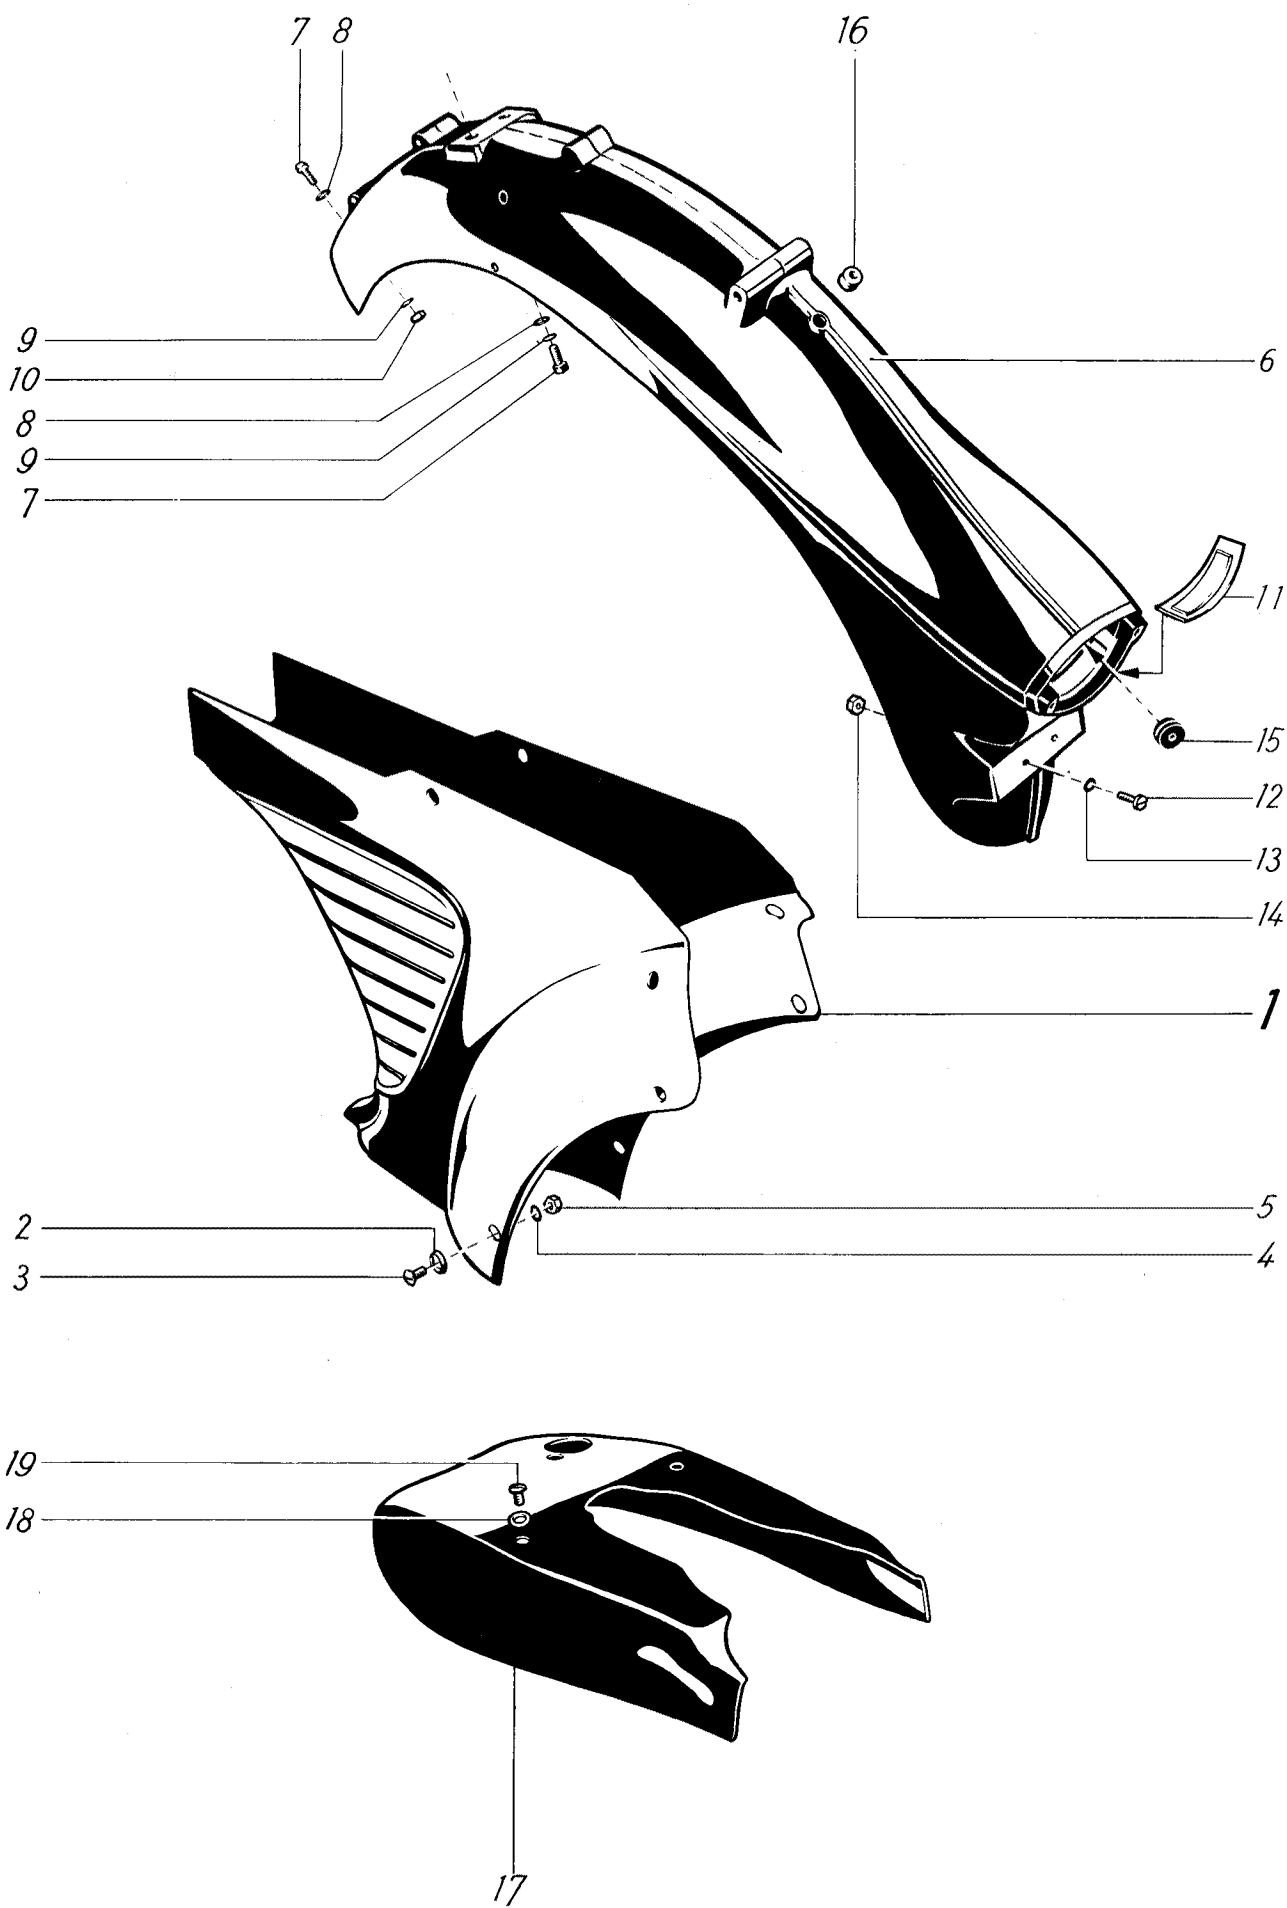


Description	Order-No.	Quantity	Remarks	Illustr.-No.
-------------	-----------	----------	---------	--------------


QUICKLY-TT

Side panel	39 39 00 501	1		1
Spacing washer	11 39 00 029	8		2
Countersunk screw	AM 5x10 DIN 91	8		3
Lock washer	J 5,3 DIN 6798	6		4
Nut	M 5 DIN 934	6		5
Mudguard, rear	39 39 00 502	1		6
Screw	M 6x15 DIN 933	4		7
Washer	6,4 DIN 125	4		8
Lock washer	J 6,4 DIN 6797	4		9
Nut	M 6 DIN 934	2		10
Countersunk screw	AM 4x10 DIN 85	2	} for number plate fixing	12
Spring washer	B 4 DIN 137	4		13
Nut	M 4 DIN 934	2		14
Rubber sleeve	—	—	} s. page 112	15
Rubber sleeve	—	—		16
Engine cowl	39 39 00 006	1		17
Washer	11 39 00 029	2		18
Countersunk screw	AM 6x10 DIN 91	2		19

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
	1 2			
Spring fork	29 41 00 900	1	with Front wheel suspension	—
Spring fork	29 41 00 901	1		1
Cone, bottom	044 412 131	1		2
Rubber plug	26 32 00 027	1		2a
Swinging link	29 41 00 506	2		3
Bush	29 41 00 013	2		4
Bush	16 41 01 056	4		5
Cab, inner	16 41 00 081	4		6
Grease nipple	D 6 DIN 3402	2		7
Spring washer	A 8 DIN 137	2		8
Screw	16 41 00 045	2		9
Bush	16 41 00 055	2		10
Cap outer	16 41 00 080	4		11
Spring ring	A 8 DIN 127	2		12
Bolt	29 41 00 016	2		13
Front wheel suspension	—	—	s. page 109, Illustr.-No. 10-26	—
Square nut	—	—	s. page 100, Illustr.-No. 21	—
Cover plate, left	—	—	} s. page 110, Illustr.-No. 7-10	—
Cover plate, right	—	—		—
Spring washer	—	—		—
Bolt	—	—		—
Plate	29 41 00 015	1	Rubber	14
Ball	024 049 962	each 21	5 mm diam	15
Cone, top	024 103 928	1		16
Cover	024 103 929	1		17
Nut	074 742 006	1		18
Lock plate	16 41 00 051	1		19
Nut	29 41 00 018	1		20


All parts like Quickly-T
s. page 87

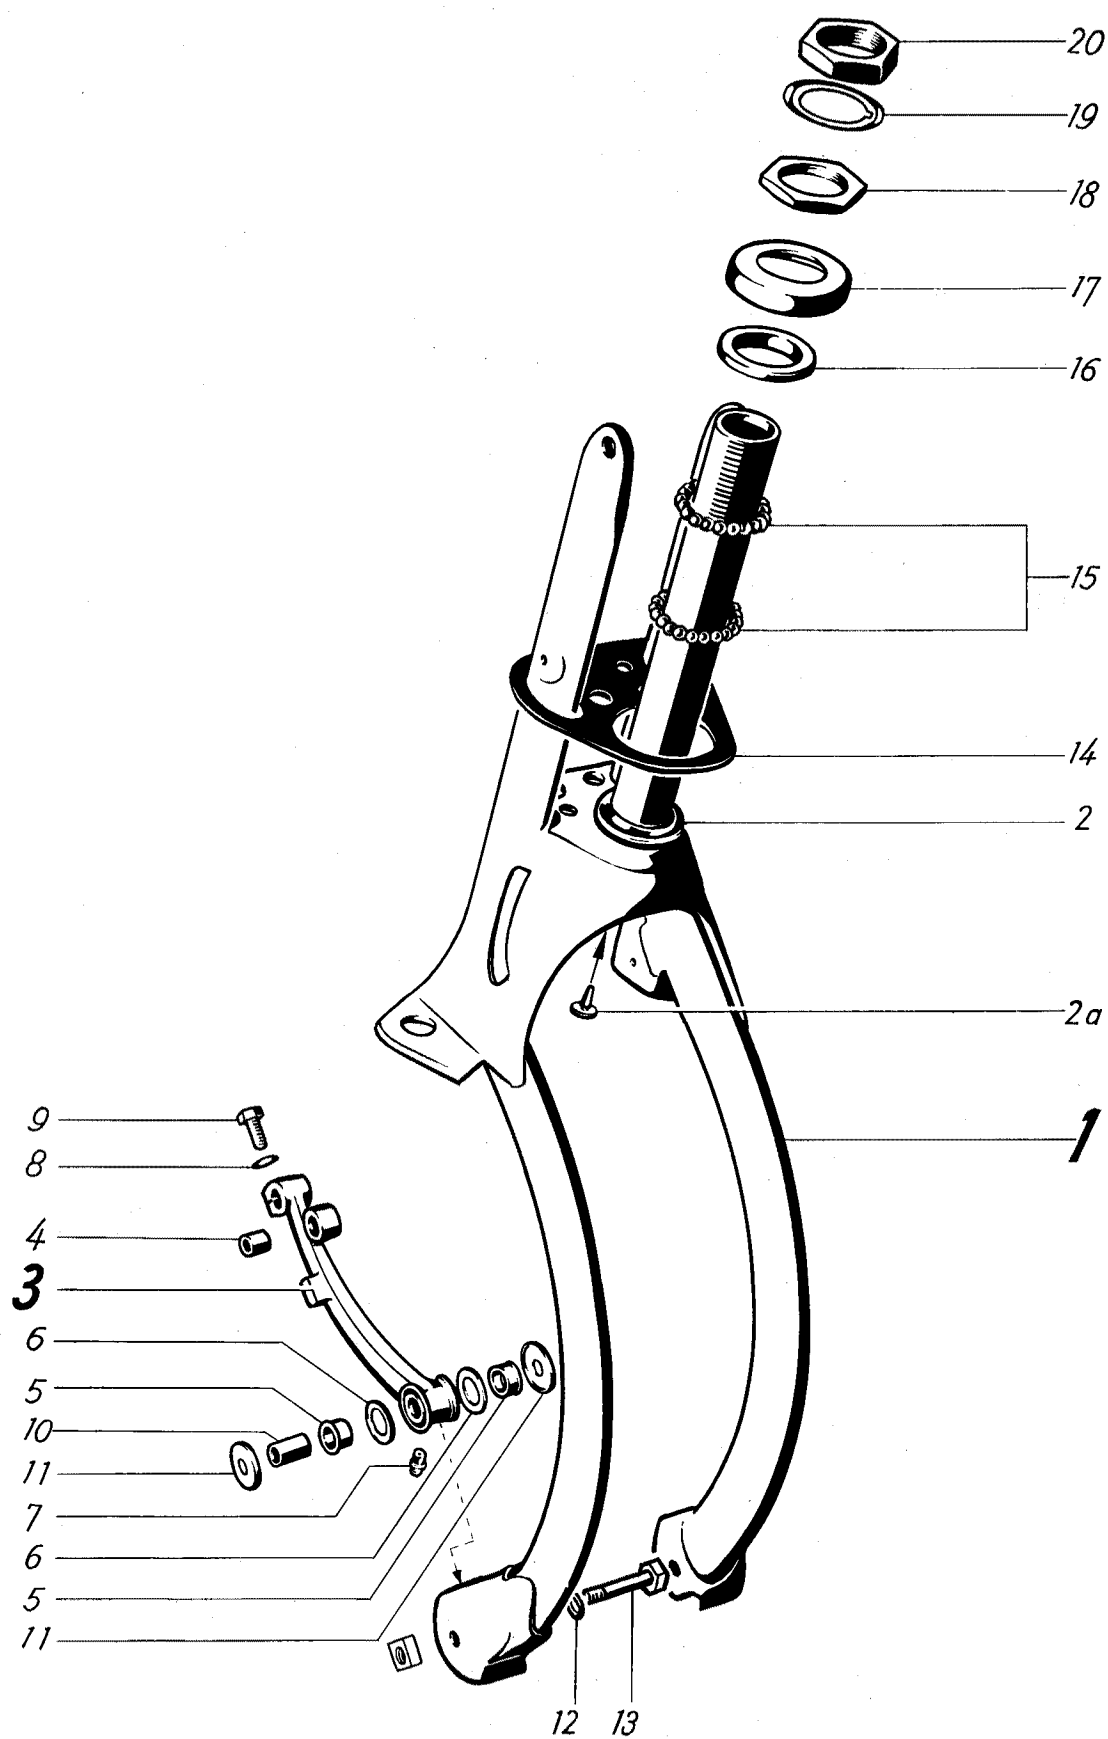


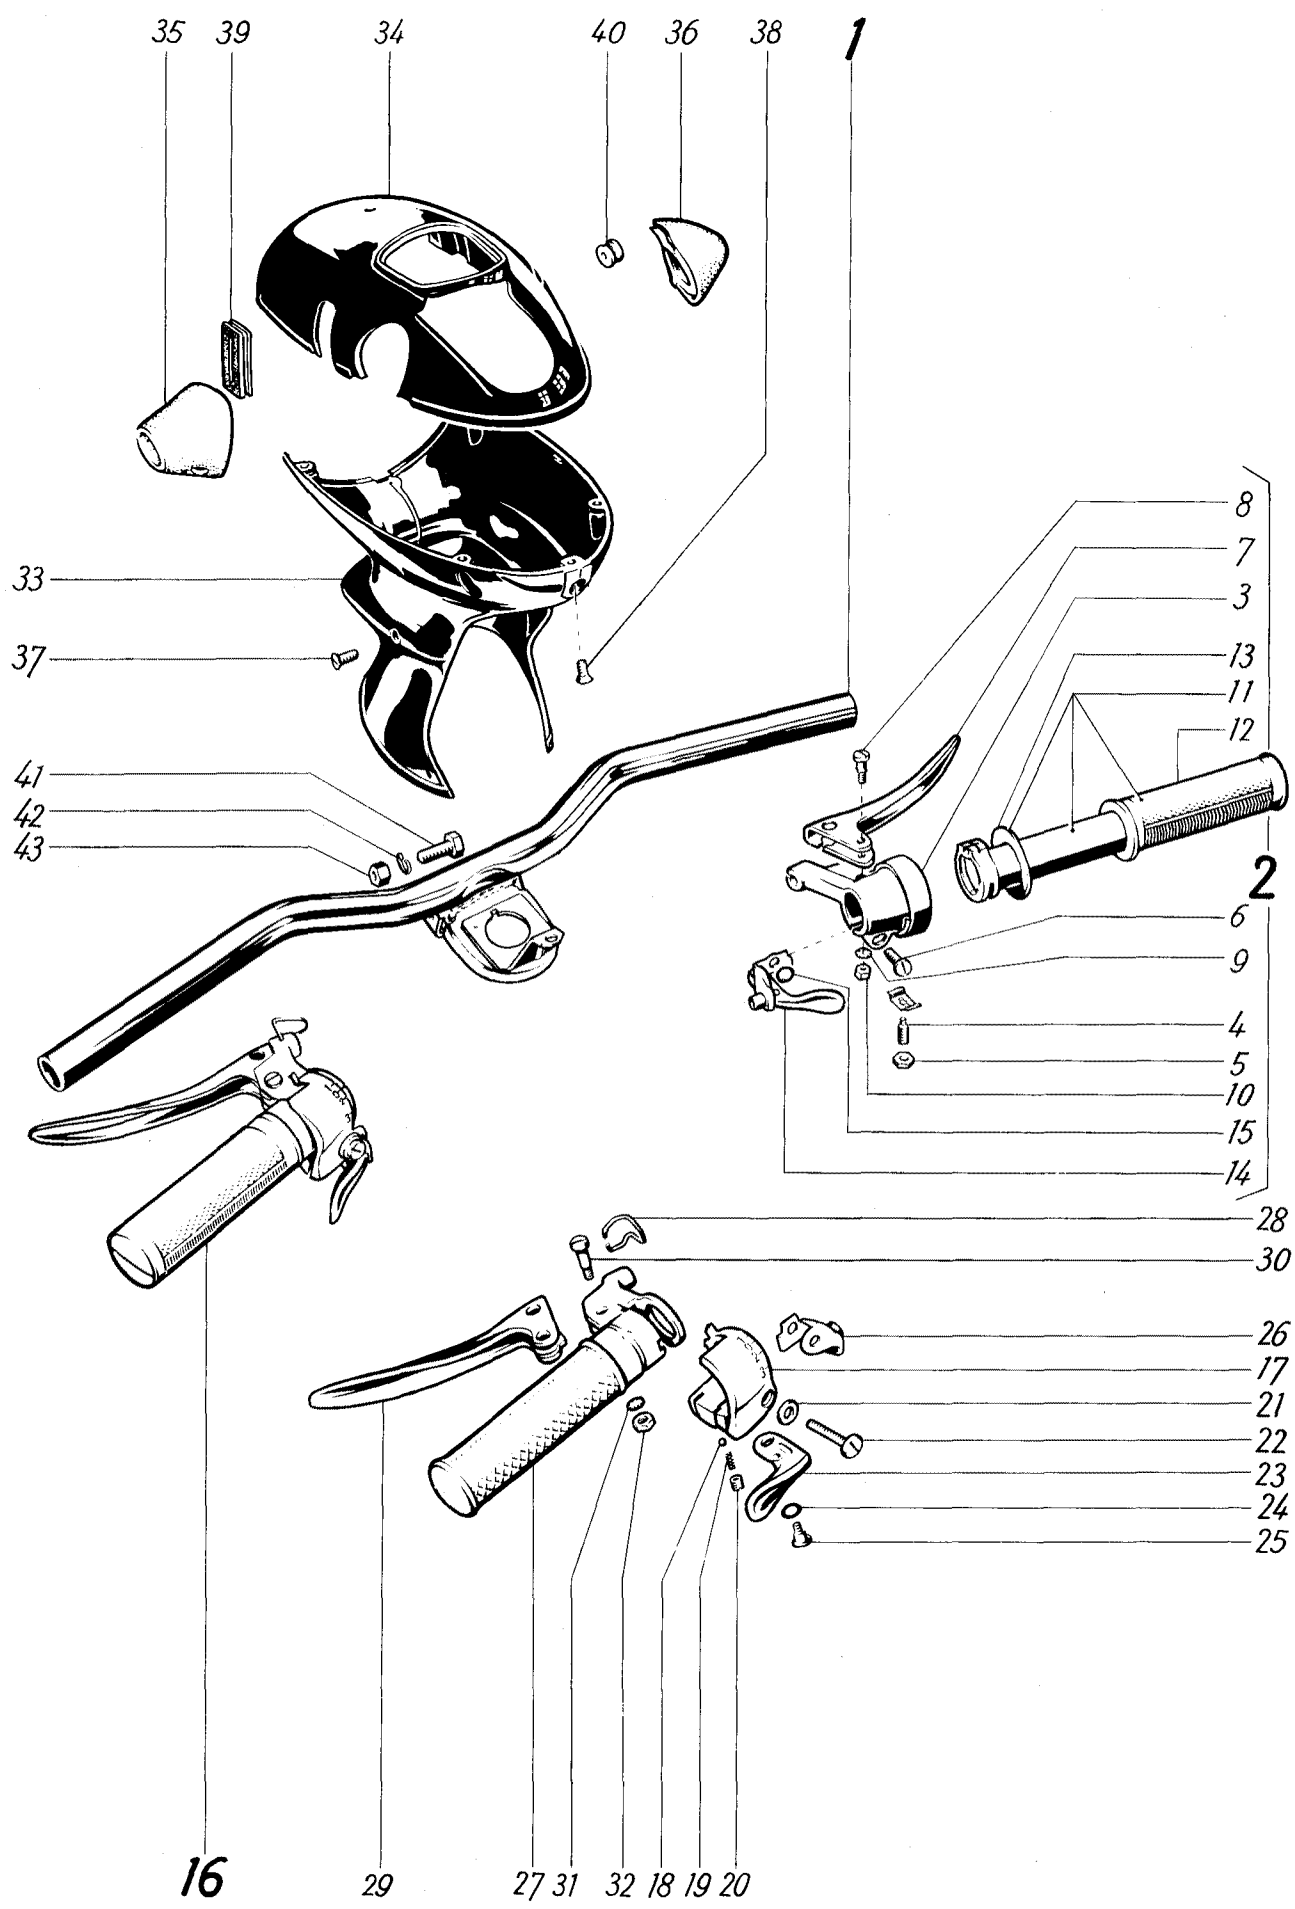

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
	1 2 3			
Handlebar assy	39 43 00 505	1		—
Handlebar	39 43 00 501	1		1
Throttle twistgrip	39 43 00 504	1		2
Twistgrip housing	39 43 00 900	1		3
Adjusting screw	16 44 00 929	1	6 mm	4
Nut	M 6 DIN 439	1		5
Screw	044 413 608	1		6
Brake lever	16 44 00 902	1		7
Bolt	16 44 00 903	1		8
Lock washer	J 5,3 DIN 6797	1		9
Nut	M 5 DIN 934	1		10
Twist grip sleeve	16 44 03 901	1		11
Rubber grip	16 44 01 904	1		12
Washer	16 44 02 921	1		13
Gear change twistgrip	16 43 02 503	1		16
Twistgrip housing	16 44 04 905	1		17
Ball	11 13 00 780	1	4 mm diam	18
Spring	16 44 00 911	1		19
Stud	014 106 433	1	M 5x4	20
Washer	6,4 DIN 125	1		21
Bolt	16 44 00 913	1		22
Lever for decompression valve	16 44 00 909	1		23
Spring washer	16 44 00 923	1		24
Bolt	M 4x4 DIN 923	1		25
Support	16 44 00 914	1		26
Twistgrip sleeve (w/o gear indication)	16 44 04 906	1		27
Rubber grip	16 44 00 904	1		—
Stirrup	16 44 00 910	1		28
Clutch lever	16 44 02 907	1		29
Bolt	16 44 00 908	1		30
Lock washer	J 5,3 DIN 6797	1		31
Nut	M 5 DIN 934	1		32
Handlebar cowling, lower	39 43 00 507	1		33
Handlebar cowling, upper	39 43 00 004	1		34
Lock ring, left	39 43 00 002	1		35
Lock ring, right	39 43 00 001	1		36
Screw	AM 6x15 DIN 91	2	→ 3 904 517 / 3 904 672	—
Screw	AM 6x15 DIN 85	2	3 904 518 / 3 904 673 →	37
Screw	M 5x12 DIN 91	5		38
Rubber seal	39 43 00 003	1		39
Rubber sleeve	16 93 00 057	1		40
Bolt	M 8x20 DIN 933	2		41
Spring ring	B 8 DIN 127	2		42
Nut	034 099 167	2		43

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
	1 2			
Trottle cable	16 44 00 512	1		1
Rubber sleeve	16 44 00 025	1		2
Control cable for clutch	39 44 00 502	1		3
Nipple seat	16 44 00 023	1		4
Gear change cable	39 44 00 503	1		5
Nipple	16 44 00 056	2		6
Front brake cable	39 44 00 501	1		7
Nipple seat	16 44 00 023	1		8
Protecting sleeve	29 44 00 001	1		9
Rubber cable	29 44 00 005	1		—
Decombressor cable	16 44 01 504	1	L = 750 mm → 3 902 240 / 3 902 214	—
Decombressor cable	29 44 01 505	1	L = 729 mm 3 902 241 / 3 902 215 →	12
Nipple seat	16 44 00 931	1	with groove	13
Circlip	4 DIN 6799	1		14
Nipple	16 44 00 021	1		15
Rubber cable strap	16 44 00 041	1	2 Gears	—
Rubber cable strap	16 44 01 041	1	3 Gears	—

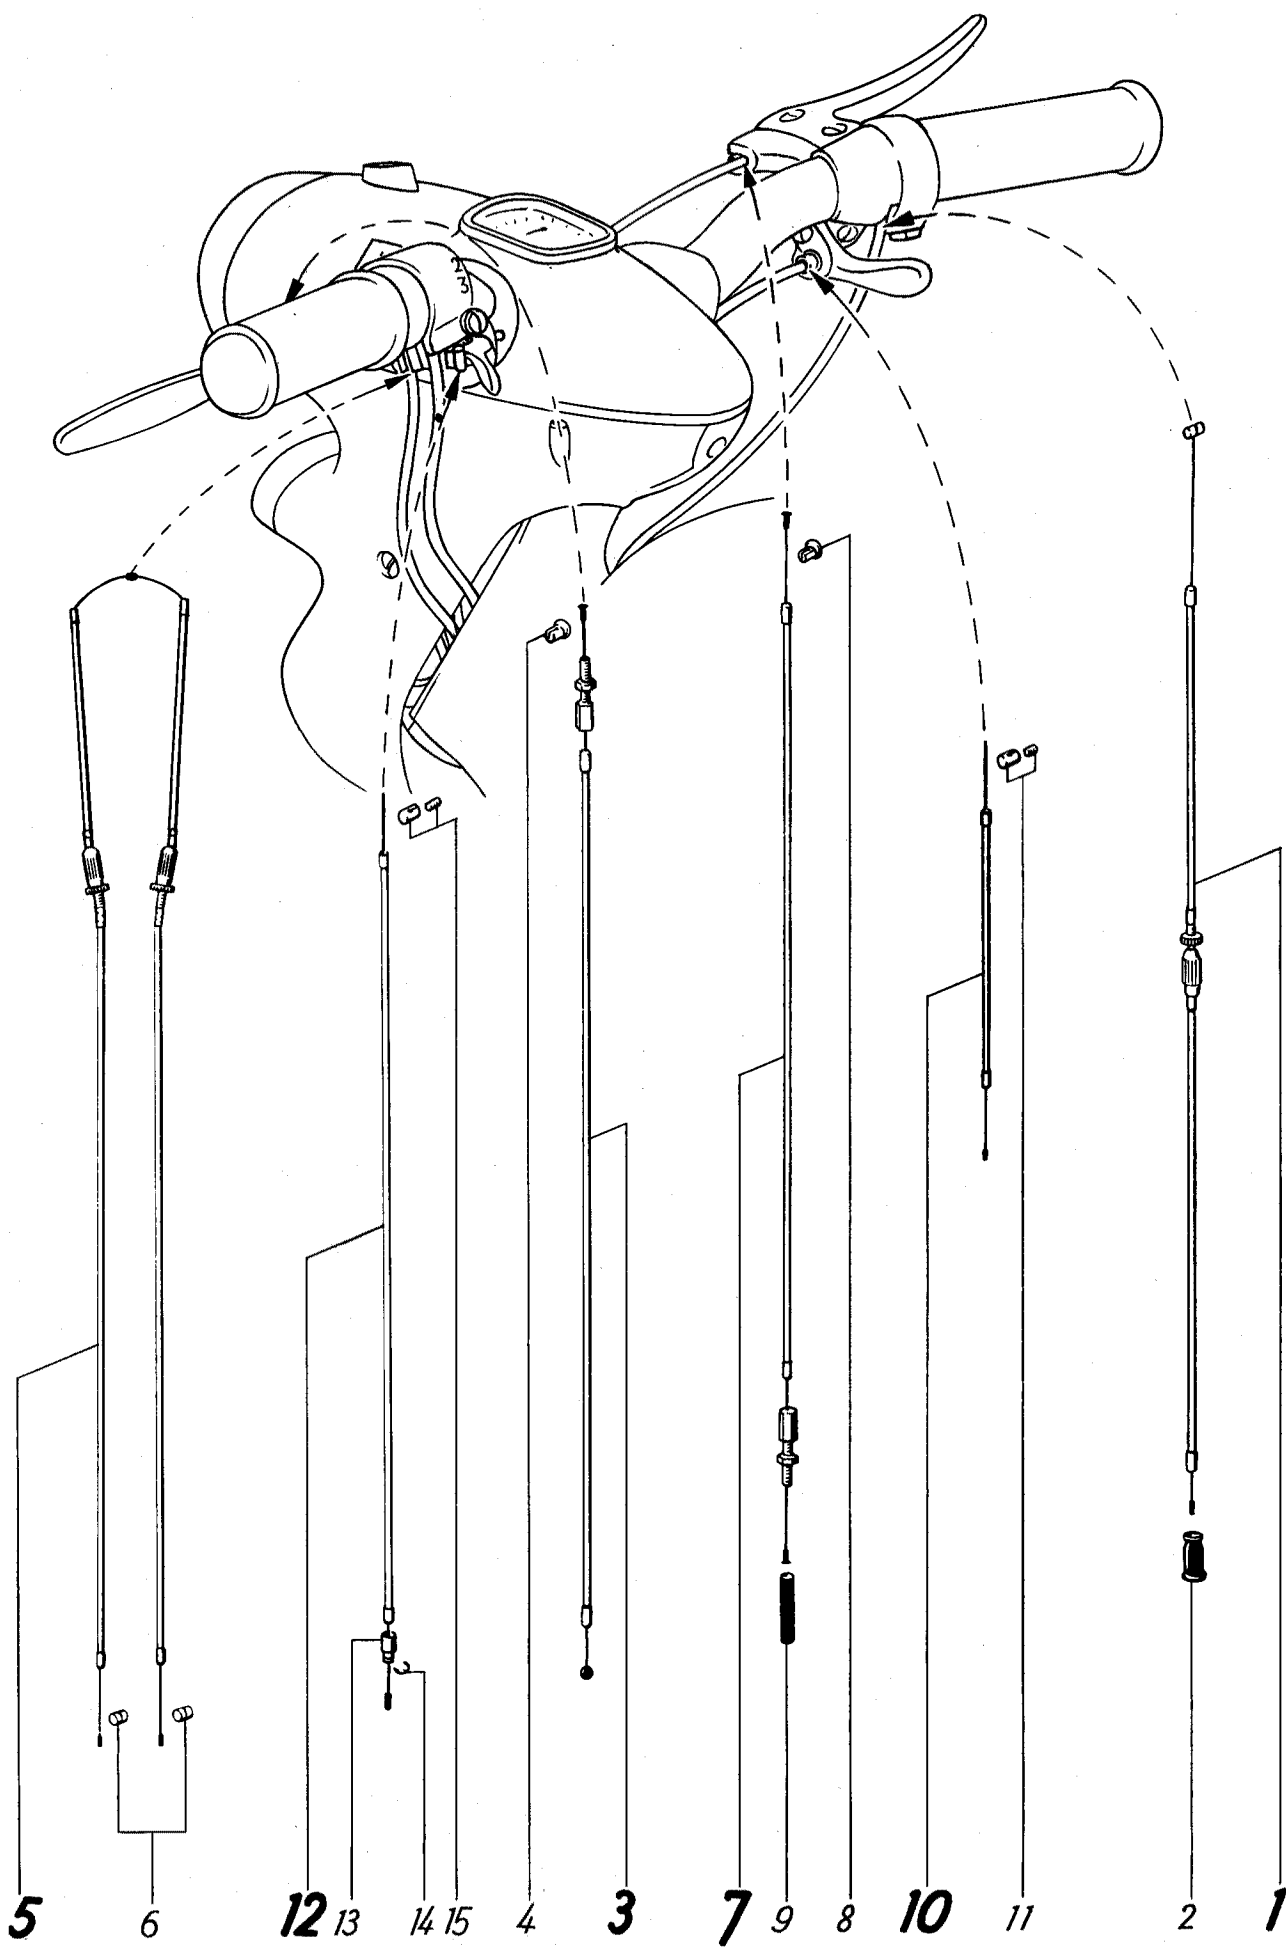

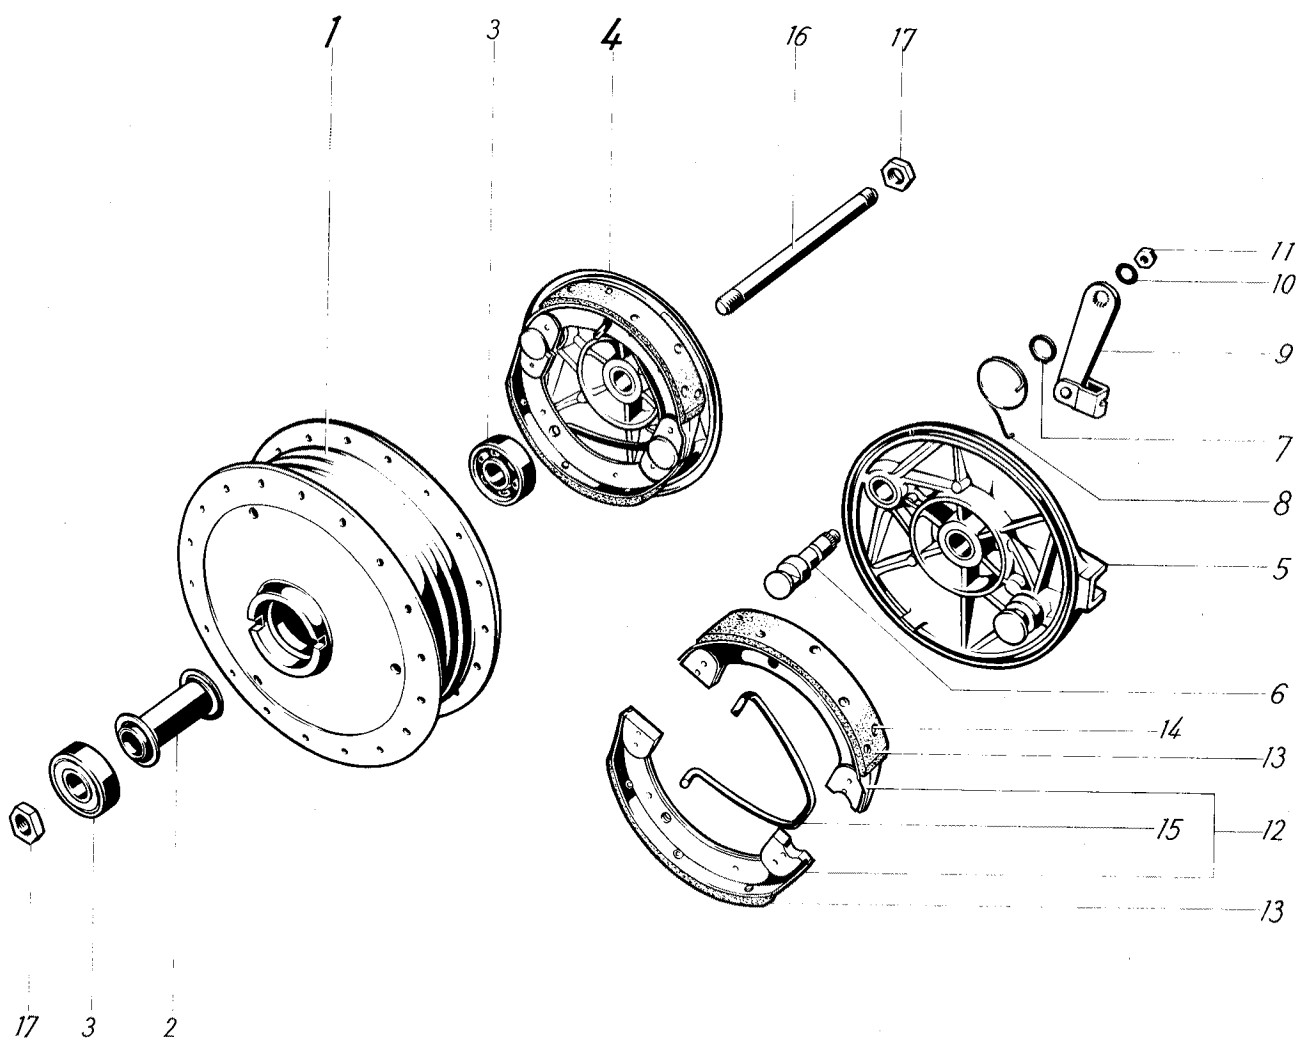

Group 51
Front wheel


NSU-Quickly (TT)


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
1 2				
Front wheel	29 51 00 919	1		—
Rim	29 52 00 015	1		—
Spoke	29 52 00 024	36		—
Nipple	025 104 183	36	M 3	—
Front wheel hub	29 51 00 920	1		—
Hub	29 51 00 507	1		1
Spacer	29 51 00 513	1		2
Ball bearing	29 51 00 025	2	12x37x12 mm	3
Front brake	29 51 00 509	1		4
Brake plate	29 51 00 508	1		5
Brake operating cam	29 51 00 012	1		6
Seal ring	075 751 030	1		7
Spring	29 51 00 019	1		8
Brake lever	29 51 00 510	1		9
Spring washer	B 7 DIN 137	1		10
Nut	16 52 01 043	1		11
Brake shoe	29 51 00 501	2		12
Lining	29 51 00 020	2		13
Rivet	B 3x7 DIN 7338	14		14
Spring	29 51 00 014	1		15
Spindle	29 51 00 006	1		16
Nut	025 103 290	2		17
Well filler	23 — 2,00	—	} not supplied	—
Inner tube	23 — 2,25	—		—
Tyre	23 — 2,25	—		—



All parts like Quickly-T
s. page 91

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
1 2				
Rear wheel	29 52 01 909	1		—
Rim	29 52 00 015	1		—
Spoke	29 52 00 024	36		—
Nipple	025 104 183	36	M 3	—
Rear wheel hub	29 52 01 910	1		—
Hub	29 52 01 512	1	when ordering a hub for vehicles prior to 3 910 610 / 3 910 779 the toothed rim with bores of 5,2 mm must be opened to 6,2 mm diam Eventual ordering of a new toothed rim 29 52 01 002.	1
Sprocket	29 52 00 002	1	36 No of teeth → 3 910 609 / 3 910 778	2
Spring ring	B 5 DIN 137	12		3
Nut	M 5 DIN 934	6		4
Sprocket	29 52 01 002	1	36 No of teeth 3 910 610 / 3 910 779 →	—
Spring ring	B 6 DIN 137	12		—
Nut	M 6 DIN 934	6		—
Spacer	29 51 00 513	1		5
Bearing	29 51 00 025	2	12x37x12 mm	6
Rear brake	29 52 00 509	1		7
Brake plate	29 51 00 508	1		8
Brake operating cam	29 51 00 012	1		9
Seal ring	075 751 030	1		10
Spring	29 52 00 007	1		11
Brake lever	29 52 00 023	1		12
Spring washer	B 7 DIN 137	1		13
Nut	16 52 01 043	1		14
Brake shoe	29 51 00 501	2		15
Lining	29 51 00 020	2		16
Rivet	B 3x7 DIN 7338	14		17
Spring	29 51 00 014	1		18
Spacer, left	29 52 00 016	1		19
Spindle	29 52 00 001	1		20
Spacer, right	29 52 00 017	1		21
Chain adjusting screw	29 52 00 013	2		22
Spring washer	B 6 DIN 137	2		23
Nut	M 6 DIN 934	2		24
Nut	025 103 744	2		25
Well filler	23 — 2,00	—	} for one - scater	—
Inner tube	23 — 2,25	—		—
Tyre	23 — 2,25	—		—
Inner tube	23 — 2,5	—	} for dual seat	—
Tyre	23 — 2,5	—		—

All parts like Quickly-T
s. page 93

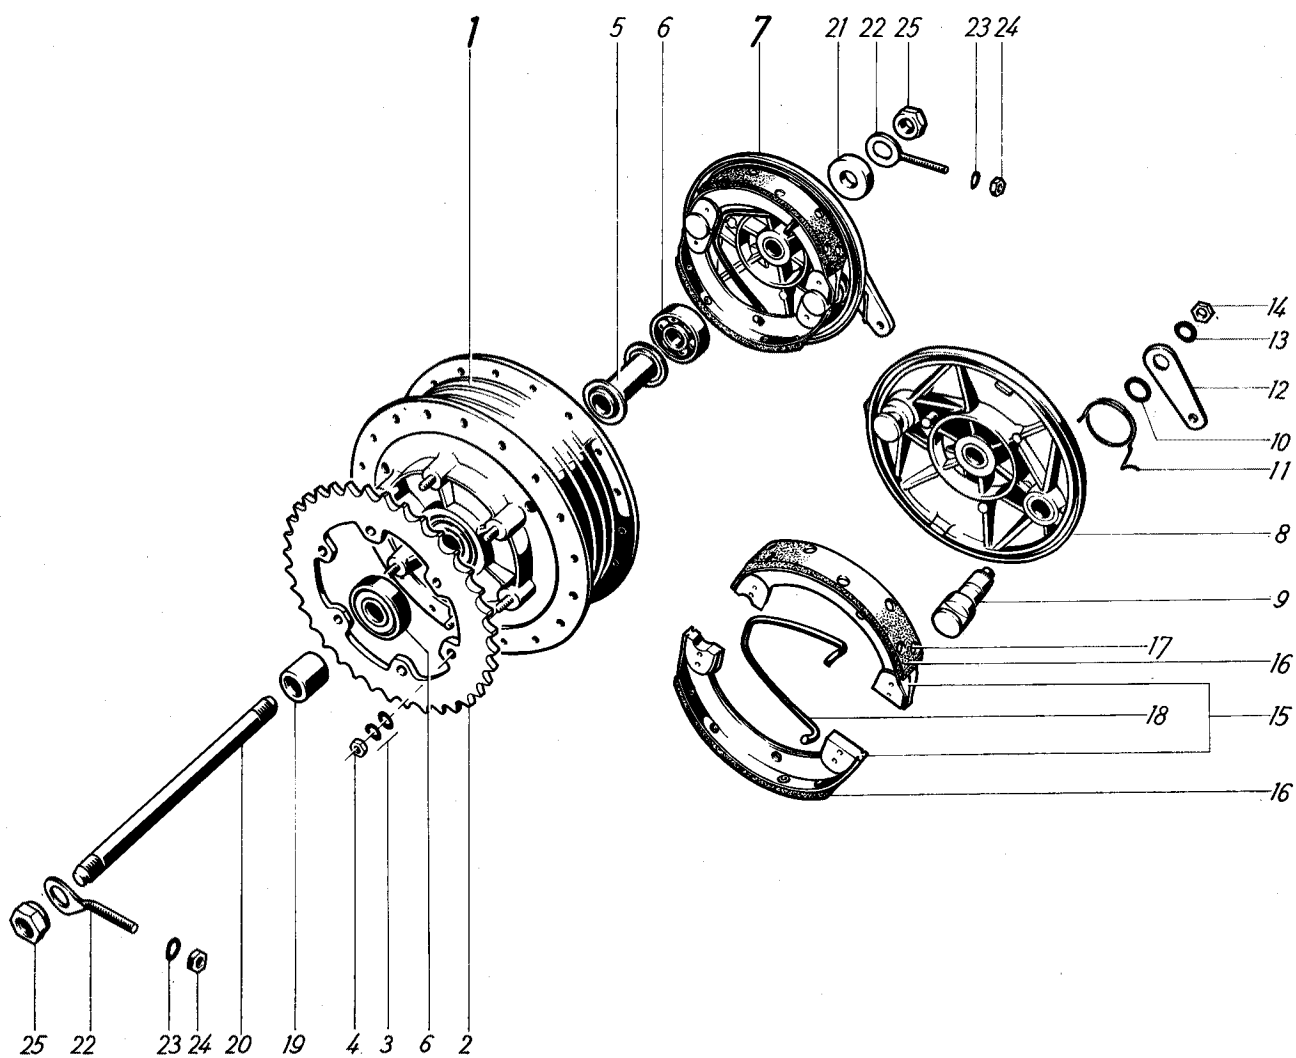

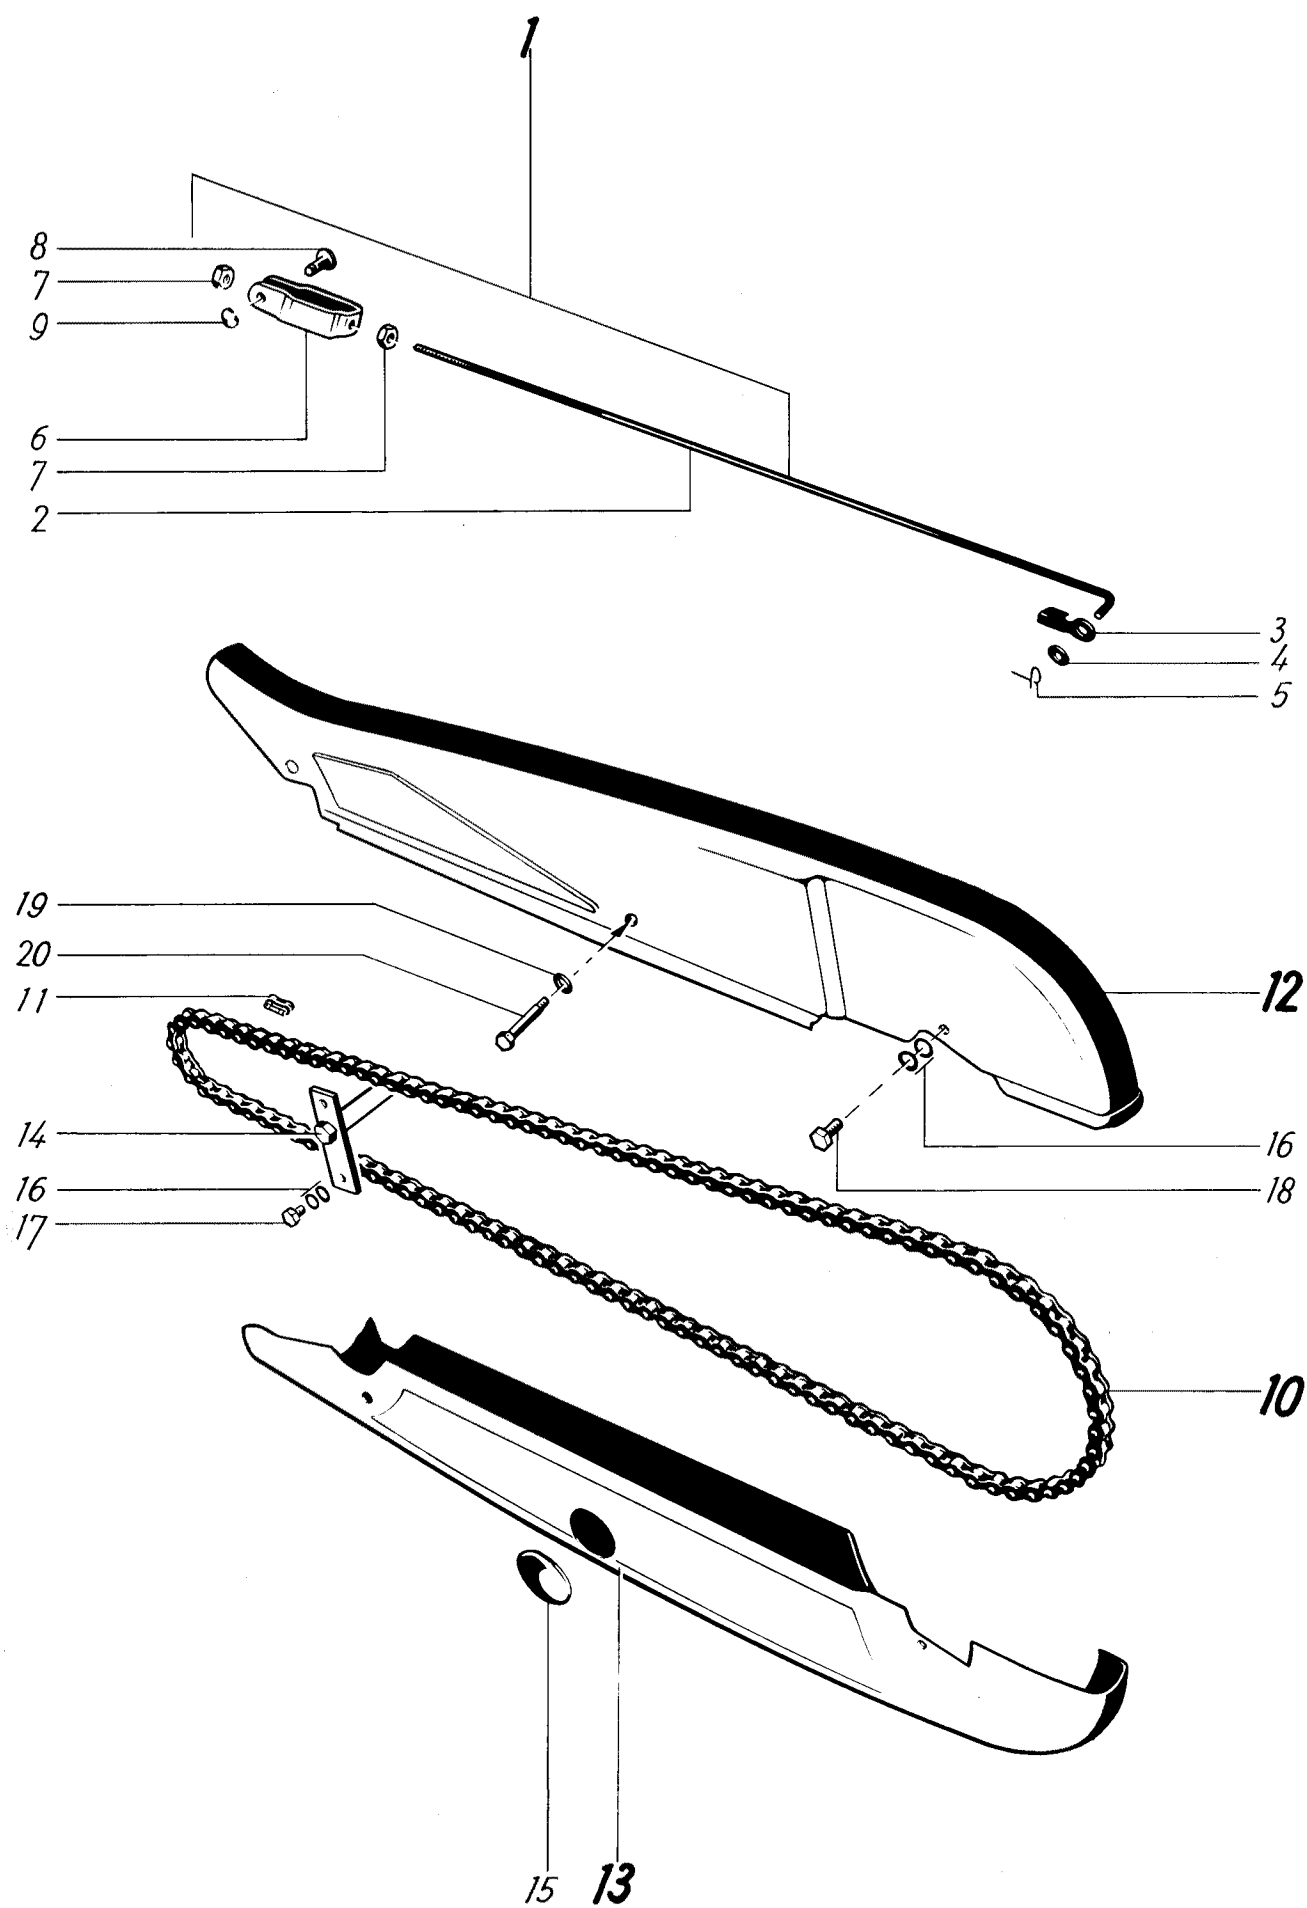

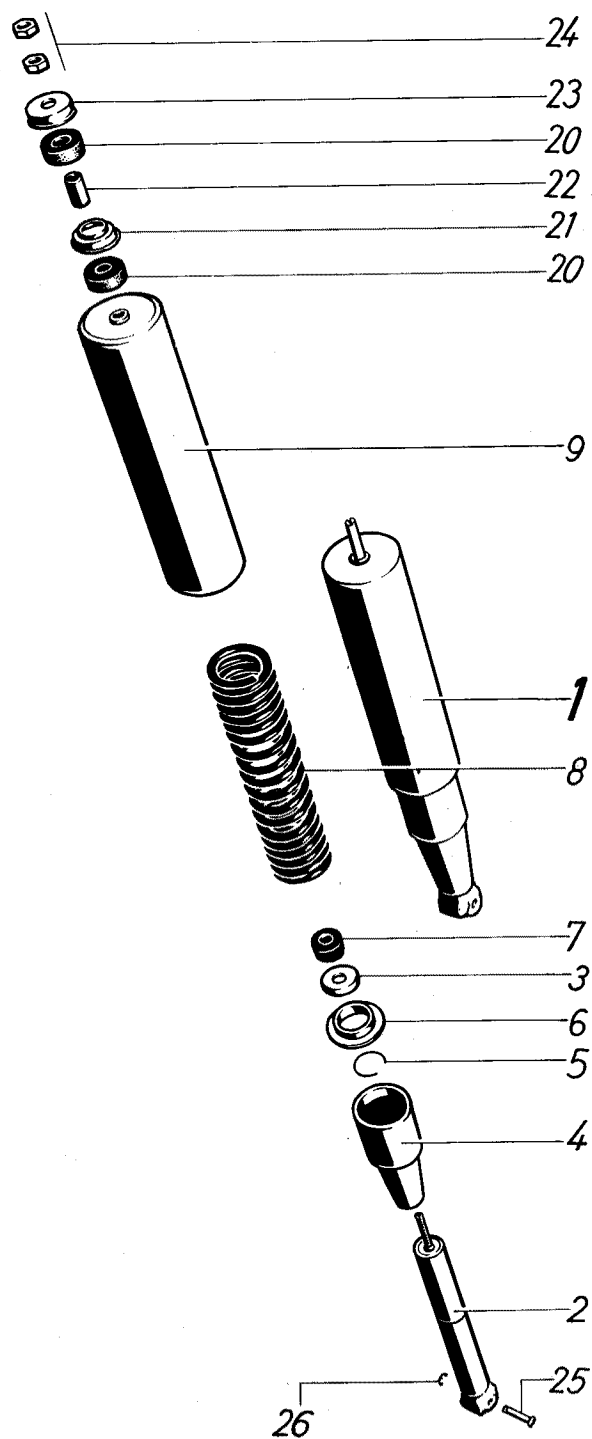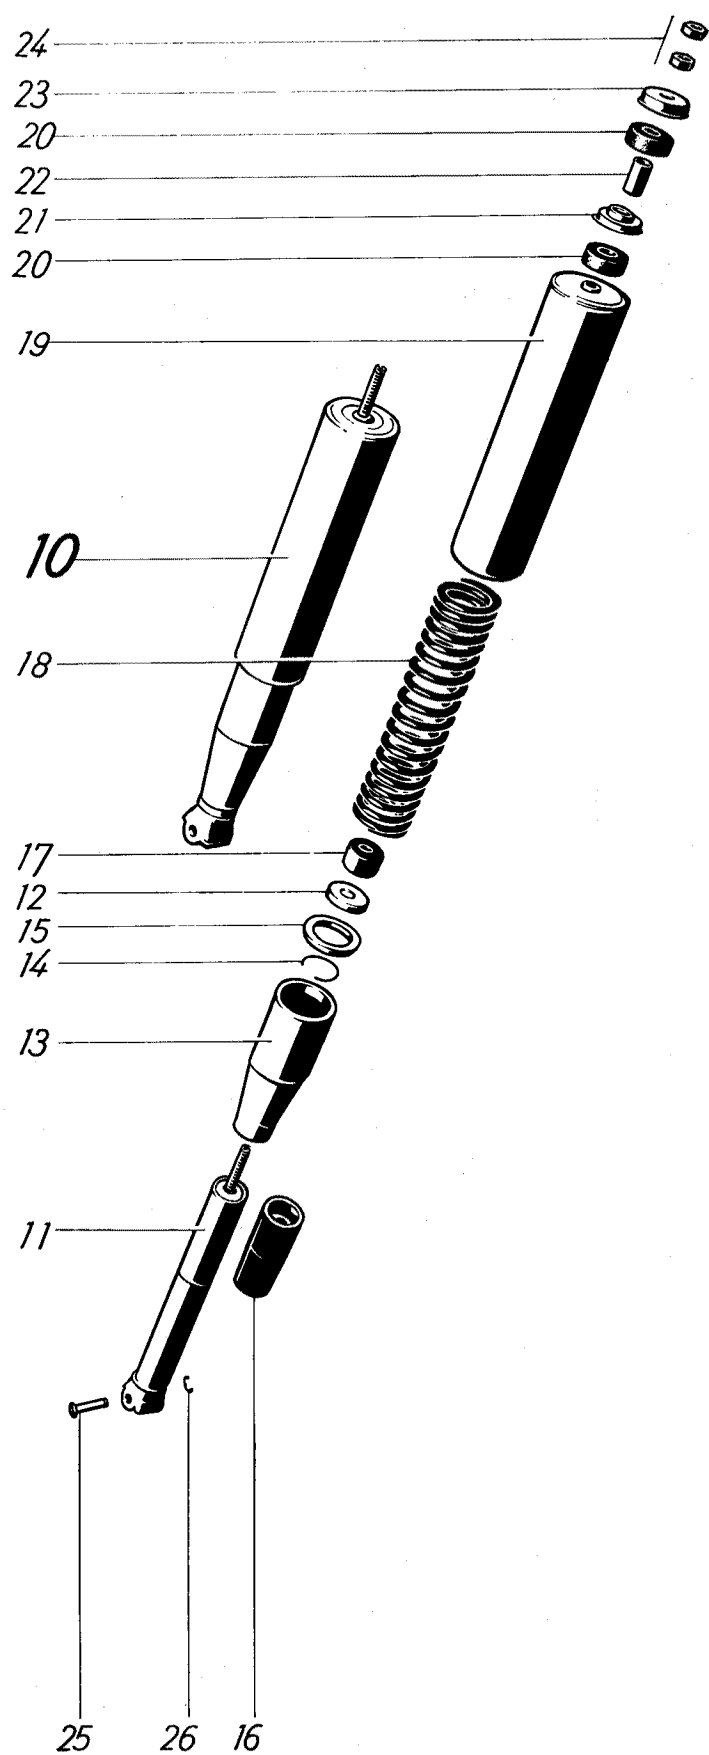



Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
	1 2 3 4			
① Rear spring unit	29 56 00 501	2	for one-seater → 3 904 140 / 3 904 329	—
① Rear spring unit	29 56 00 510	2	for dual seat } is not supplied 29 56 01 510 order	—
Rear spring unit	29 56 01 510	2	3 904 141 / 3 904 330 →	1
Shock absorber	29 56 00 502	2		2
Cover cap	29 57 00 030	2		3
Rubber ring (hight 30 mm)	29 56 00 021	2	→ 3 904 140 / 3 904 329 order also	—
Cover sleeve	29 56 00 014	2		4
Circlip	29 56 00 016	2		5
Ring	29 56 00 015	2		6
Stop	29 57 00 016	2	{ hight 15 mm → 3 904 140 / 3 904 329	7
Stop	29 56 00 020	2	{ hight 5 mm 3 904 141 / 3 904 330 →	—
① Rear spring (thickness of wire 5,3 mm)	29 56 00 011	2	for one-seater } → 3 904 140 / 3 904 329 is not supplied 29 56 01 005 order	8
① Rear spring (thickness of wire 6 mm)	29 56 00 005	2	for dual seat	—
Rear spring (thickness of wire 5,3 mm)	29 56 01 005	2	3 904 141 / 3 904 330 →	—
Protection tube	29 56 00 506	2		9
② Front spring unit	29 57 00 501	2	{ → 3 904 140 / 3 904 329 is not supplied 29 57 01 501 order	—
Front spring unit	29 57 01 501	2	3 904 141 / 3 904 330 →	10
Shock absorber	29 57 00 502	2		11
Cover cap	29 57 00 030	2		12
Cover sleeve	29 57 00 031	2		13
Circlip	29 56 00 016	2		14
Ring	29 57 00 032	2		15
Protection sleeve	29 57 00 015	2		16
Stop	29 57 00 016	2	hight 15 mm	17
② Front spring (thickness of wire 4,5 mm)	29 57 00 017	2	{ → 3 904 140 / 3 904 329 is not supplied 29 57 01 017 order	18
Front spring (thickness of wire 4,5 mm)	29 57 01 017	2	3 904 141 / 3 904 330 →	—
Protection tube	29 57 00 506	2		19
Rubber ring for balancing	29 57 00 021	each 4		20
Balancing cup	29 57 00 023	each 2		21
Spacer bush	29 57 00 022	each 2		22
Balancing cap	29 57 00 024	each 2		23
Nut	29 57 00 035	each 4		24
Bolt	29 57 00 025	each 2		25
Circlip	6 DIN 6799	each 2		26

① Doing repairs on machines prior to No. 3 904 141 / 3 904 330 exchange rear wheel suspension in pairs, resp. use rear wheel springs (part No. 29 56 01005) of wire gauge 5,3 mm with one stop-ring each at top (part No. 29 56 00 020), height 5 mm.

② Doing repairs prior to machine-No. 3 904 141 / 3 904 330 exchange front wheel suspension resp. front wheel springs in pairs.


Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
Emblem	29 66 00 019	2	for Front mudguard	1
Pin	29 66 00 023	4		2
Nut	40 66 00 216	4		3
Cover plate	29 66 00 508	1		4
Spring	29 66 00 022	1	} only for repair	5
Rivet	3x5 DIN 660	1		6
Cover plate, left	29 66 00 001	1		7
Cover plate, right	29 66 00 002	1		8
Spring washer	A 5 DIN 137	2		9
Screw	AM 5x6 DIN 85	2		10
Angle	29 66 00 511	1		11
Spring washer	A 7 DIN 137	2		12
Bolt	M 7x15 DIN 933	2		13
Bracket	29 66 00 016	1		14
Bolt	M 6x12 DIN 933	1		15
Spring washer	B 6 DIN 137	2		16
Nut	M 6 DIN 934	1		17
Inflator	16 93 01 502	1		21

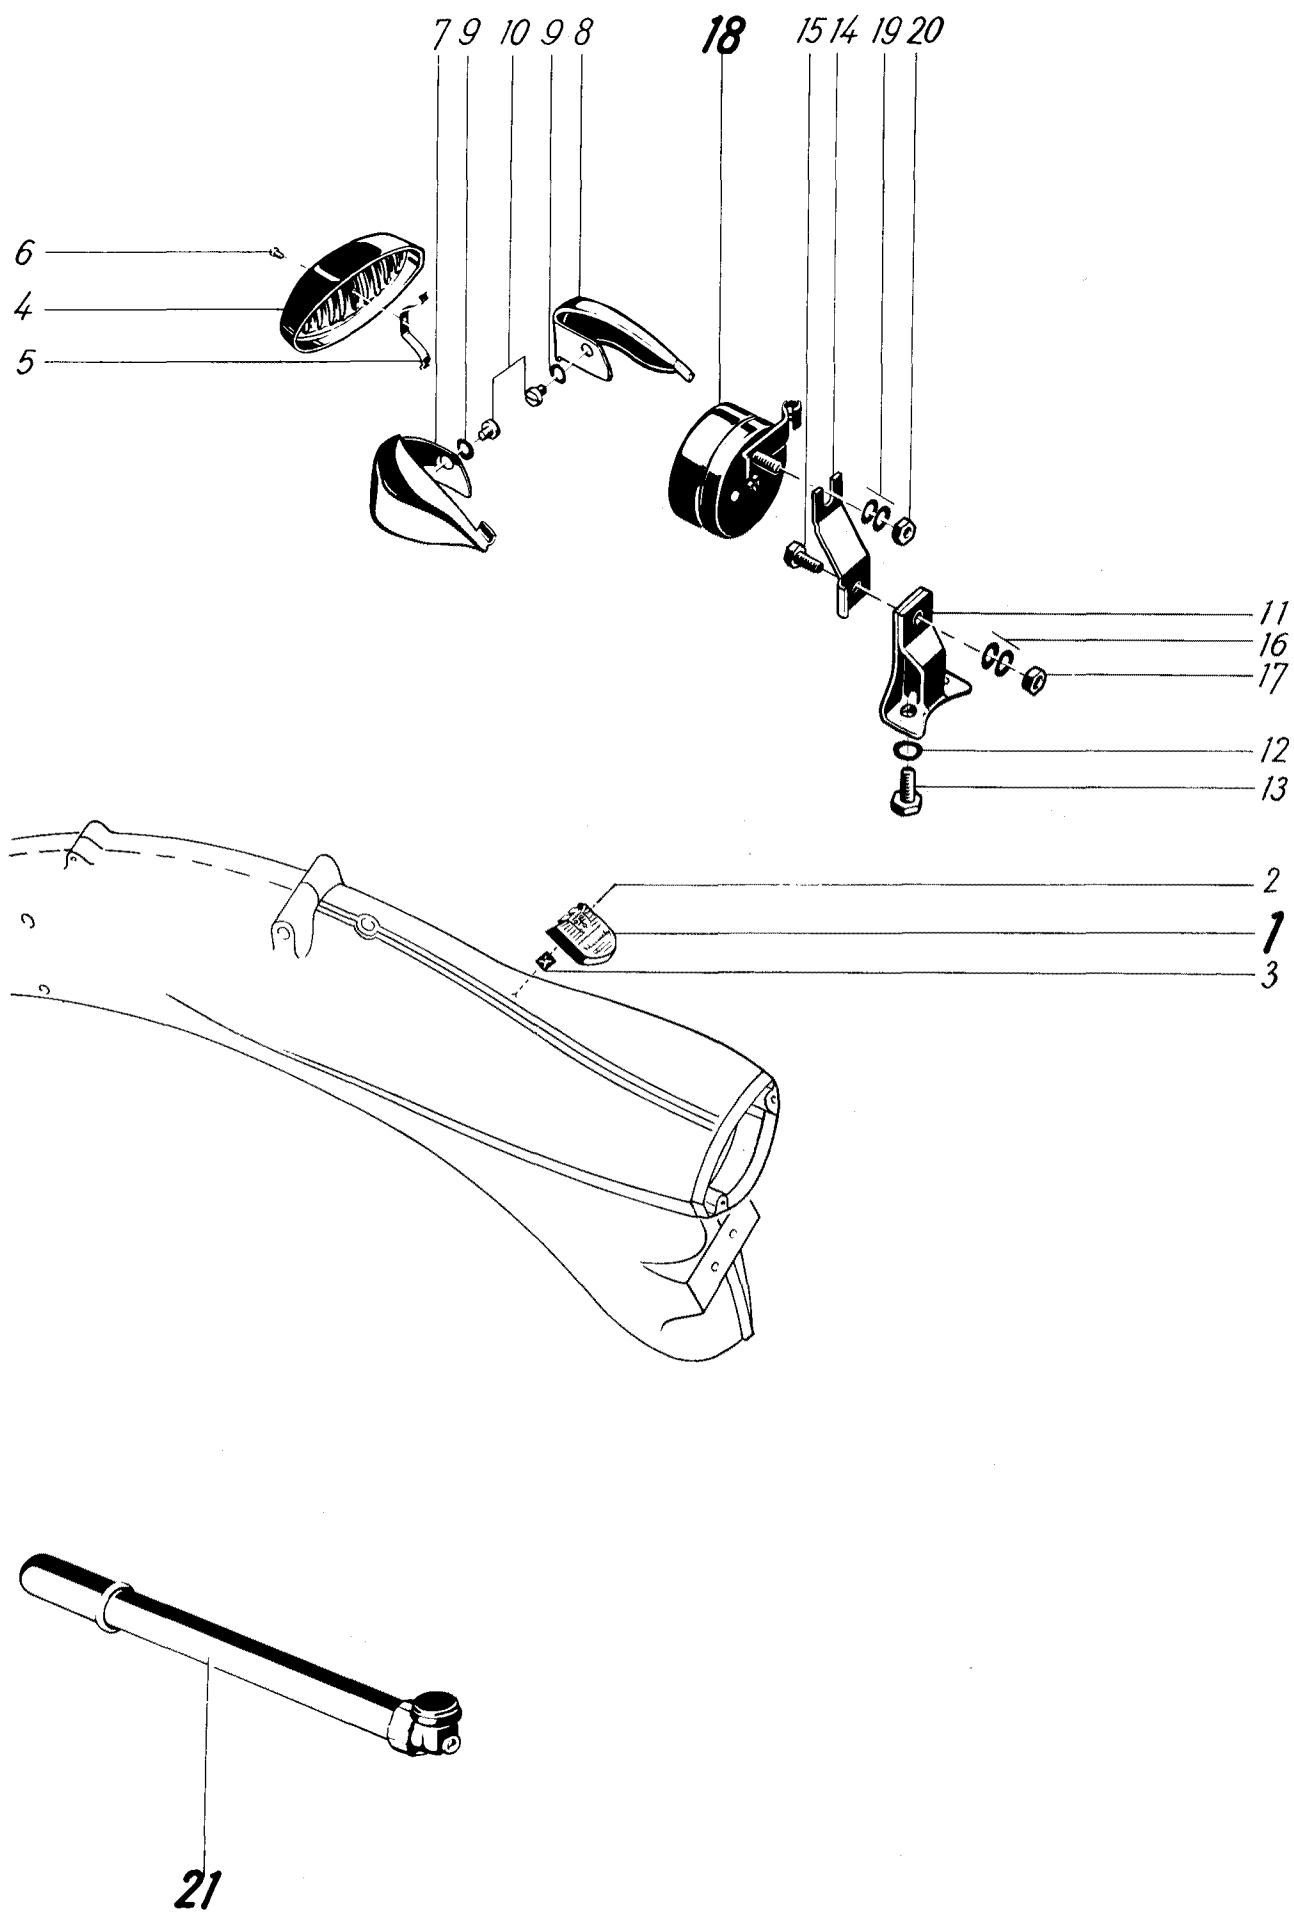


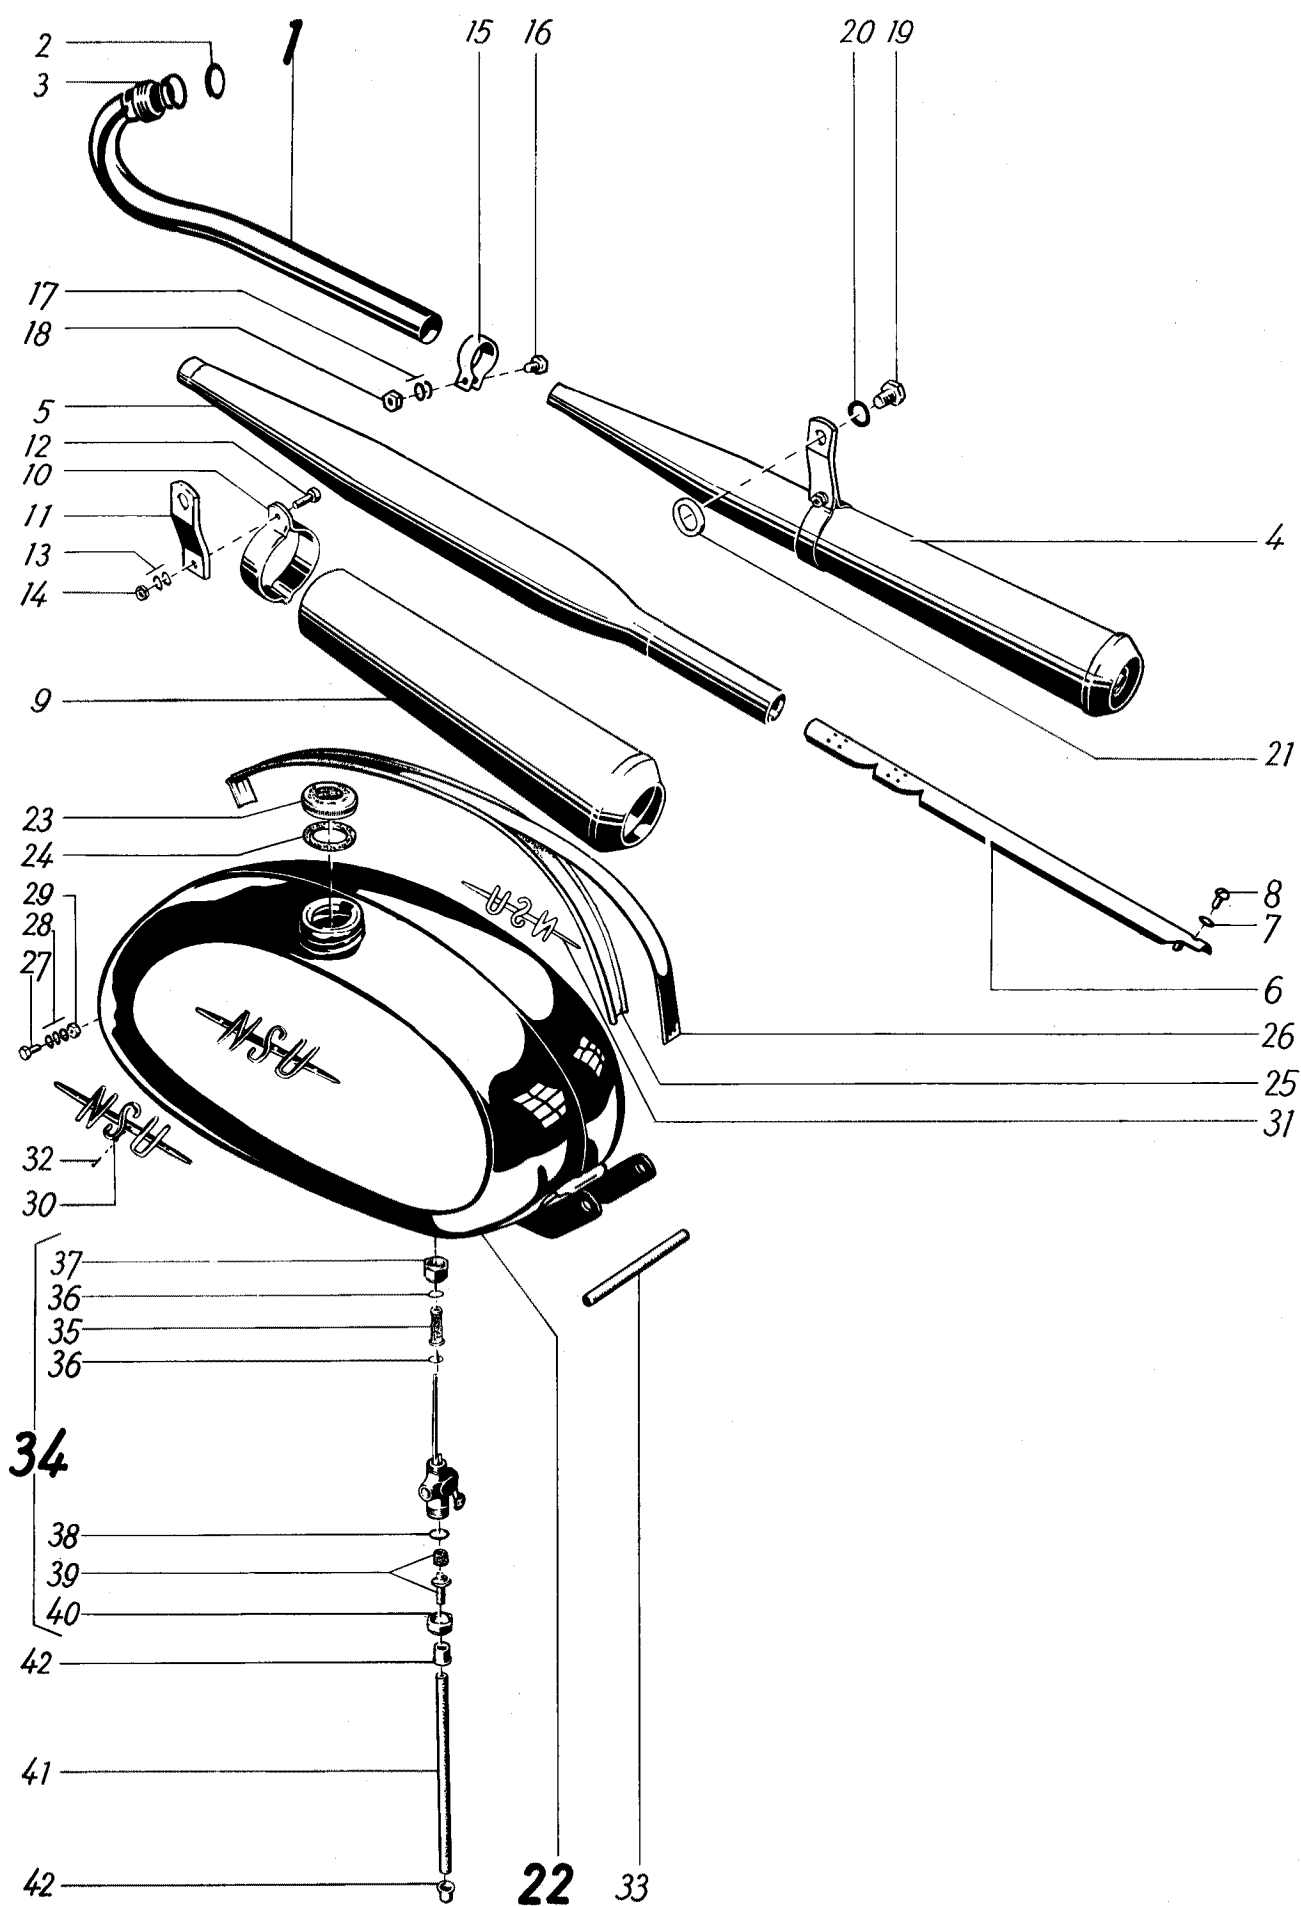

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
Exhaust pipe	29 71 00 002	1		1
Gasket	16 71 00 002	2		2
Nut	16 71 00 001	1		3
Silencer assy	39 71 00 502	1		4
Silencer	16 71 02 505	1		5
Baffle	16 71 01 009	1		6
Lock washer	J 4,3 DIN 6798	1		7
Screw	AM 4x8 DIN 86	1		8
Exhaust pipe embellisher	39 71 00 501	1		9
Silencer clip	16 71 03 008	1		10
Silencer clip	39 71 00 003	1		11
Bolt	M 6x12 DIN 933	1		12
Spring washer	B 6 DIN 137	2		13
Nut	M 6 DIN 934	1		14
Clip	16 71 00 006	1		15
Bolt	M 5x18 DIN 933	1		16
Spring washer	A 5 DIN 137	2		17
Nut	M 5 DIN 934	1		18
Bolt	29 37 00 002	1	} also for footrests, right	19
Spring washer	B 12 DIN 137	1		20
Washer	29 37 00 033	1		21
Fuel tank	39 72 00 900	1		22
Sign. left	39 72 00 010	1	} 3 906 331 / 3 906 675 →	—
Sign. right	39 72 00 011	1		—
Grooved pin	2,3x6 DIN 1476	4		—
Filler cap	16 72 01 504	1		23
Gasket	16 72 00 024	1		24
Pad	39 72 00 007	1		25
Cover strip	39 72 00 036	1		26
Bolt	M 6x12 DIN 933	2		27
Spring washer	B 6 DIN 137	4		28
Nut	M 6 DIN 934	2		29
Sign. NSU, left	29 66 00 017	1	} → 3 906 330 / 3 906 674	30
Sign. NSU, right	29 66 00 014	1		31
Grooved pin	2x6 DIN 1476	6		32
Hose	11 72 00 006	1	5x9 mm diam L = 120 mm	33
Fuel tap	16 72 01 505	1		34
Strainer	16 72 00 905	1		35
Gasket	16 72 00 903	2		36
Nut	16 72 00 904	1		37
Casket	16 72 00 901	1		38
Connector	16 72 00 900	1		39
Nut	16 72 00 902	1		40
Hose	033 109 155	1	5x9 mm diam L = 200 mm	41
Sleeve	023 104 269	2		42

Description	Order-No.	Quantity	Remarks	Illustr.-No.
QUICKLY-TT				
	1 2 3			
Cabel harness	39 80 00 502	1		—
Lead — engine — head lamp	39 80 01 501	1		—
Ground cable (headlight)	39 80 00 503	1		—
Rubber sleeve	39 39 00 005	1	} s. page 102, Illustr.-No. 15/16	—
Rubber sleeve	16 93 00 057	1		—
Headlamp	29 81 00 508	1		1
Rim	29 81 00 902	1		2
Lens	29 81 00 914	1		3
Reflector w/spring	29 81 00 920	1		4
Socket	29 81 00 921	1		5
Screw	29 81 00 919	4		6
Cylinder screw	29 81 00 901	1		7
Ground cable	29 81 00 917	1		—
Spring	29 81 00 918	1		8
Gasket	29 81 00 905	1		9
Nut	29 81 00 908	1		10
Spring	29 81 00 909	1		11
Washer	29 81 00 910	1		12
Screw	29 81 00 911	1		13
Screw	29 81 00 912	1		14
Circlip	29 81 00 913	1		15
Bulb	16 81 00 514	1	6 V 15 W Bilux	16
Rattle	29 81 00 504	1		17
Lead for rattle	16 81 00 003	1	L = 250 mm	—
Dipswitch	39 81 00 501	1		18
Tightening strap	16 81 00 927	1		—
Dipper-switch lead	16 81 00 903	1		—
Tail lamp	29 81 01 510	1		19
Casing with no plate cover	29 81 00 925	1		20
Screw	29 81 00 901	1		—
Gasket	29 81 00 923	1		21
Outlet of light	29 81 00 924	1		22
Screw	29 81 00 907	2		23
Bulb	126 110 414	1	H 6 V 3 W	24
Switch	16 43 00 510	1		—
Insulating plate	16 81 00 933	1		25
Contact plate	16 81 01 924	1		26
Switch lever	16 81 02 905	1		27
Contact bridge	16 81 01 906	1		28
Spring	16 81 01 907	1		29
Washer	16 81 01 908	1		30
Split pin	1x12 DIN 94	1		31

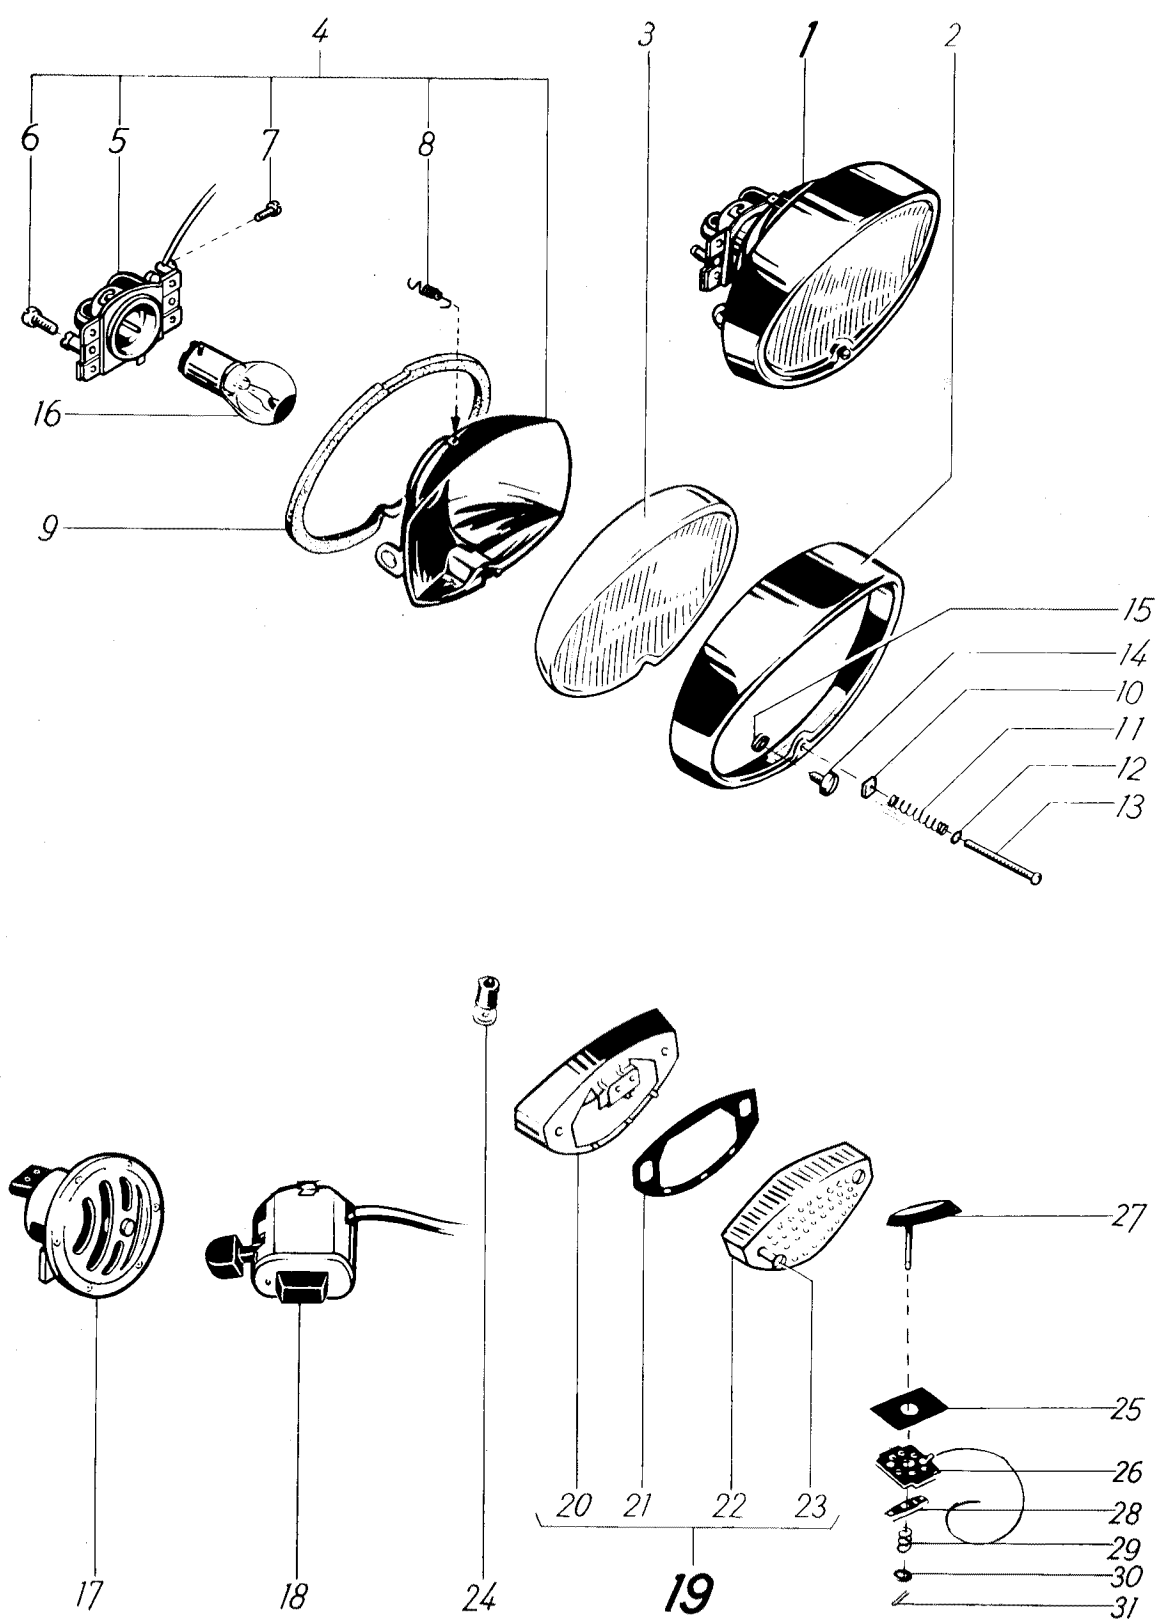

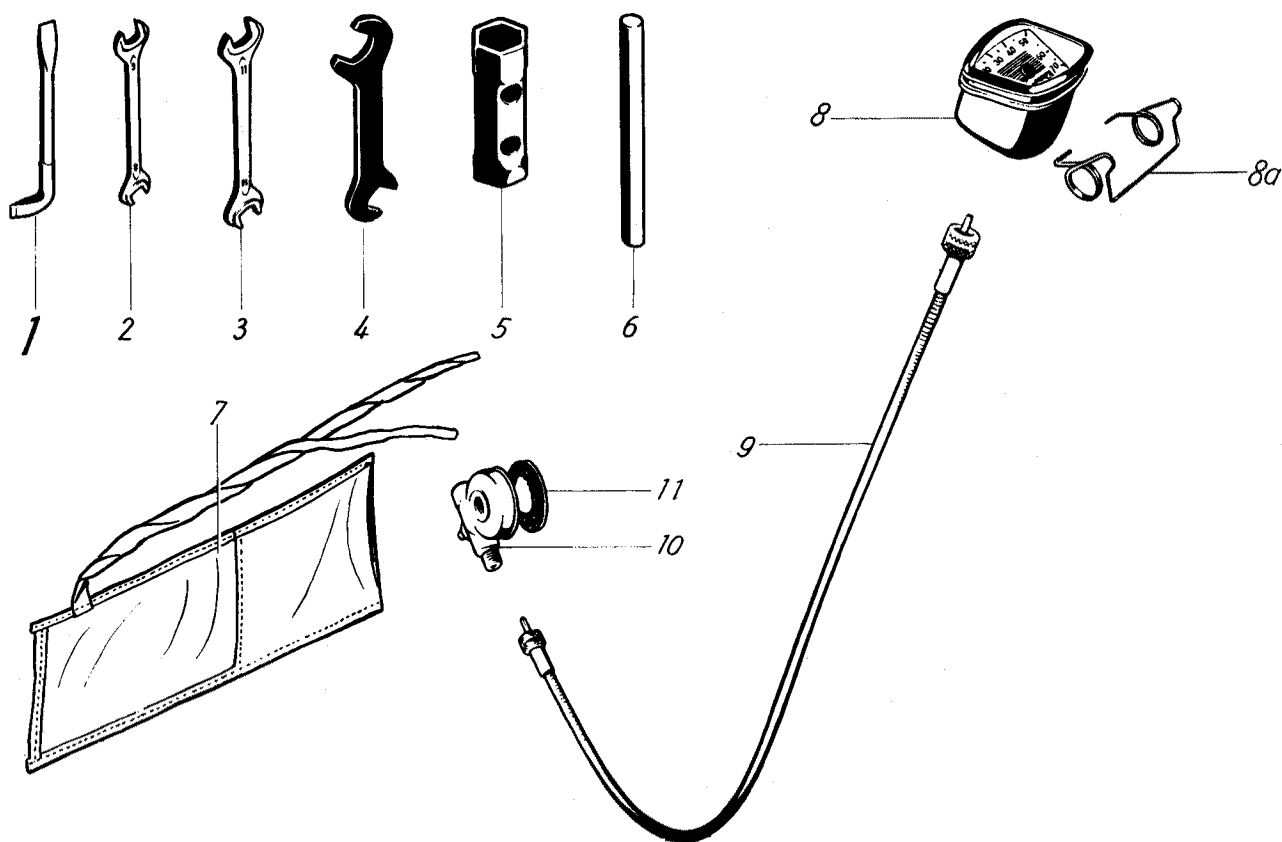

All rights reserved by NSU
Reproduction or translation of this Instruction Book
- either in excerpt or in toto - is not permitted
without the written approval Messrs.

NSU WERKE AKTIENGESELLSCHAFT NECKARSULM

1C2 731 b 1 6 60 33

Printed in Germany